


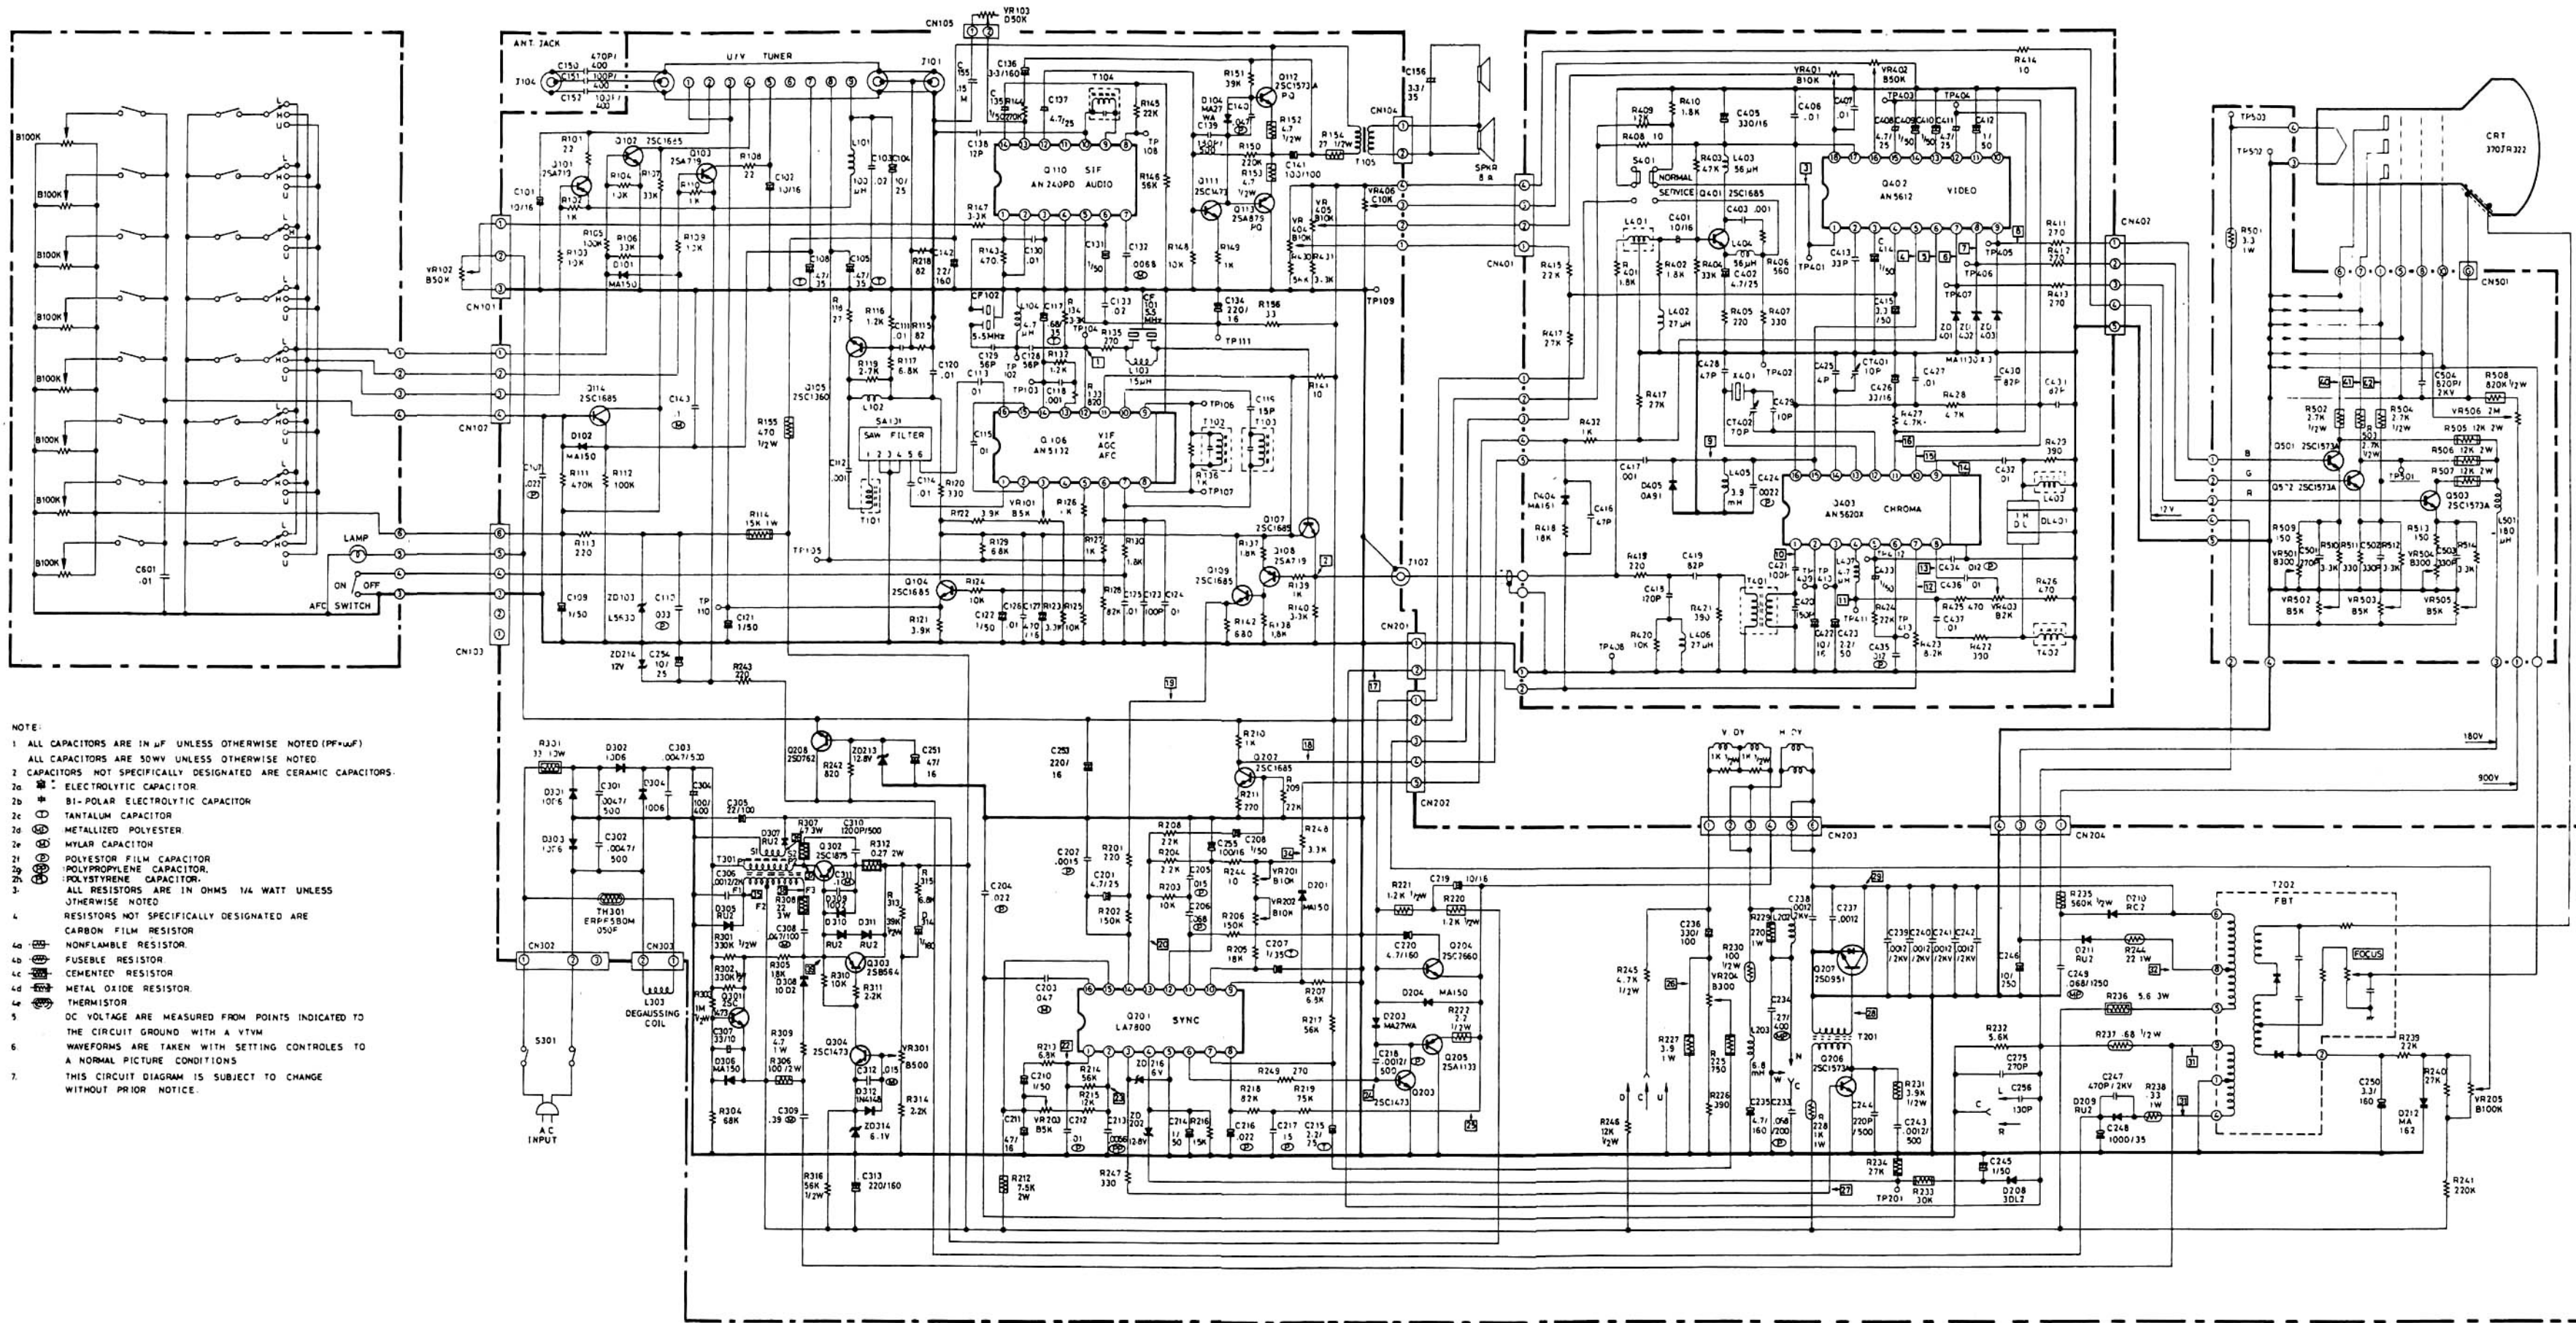
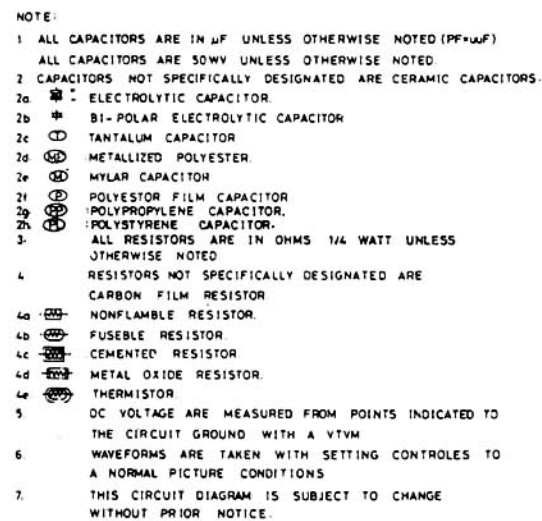


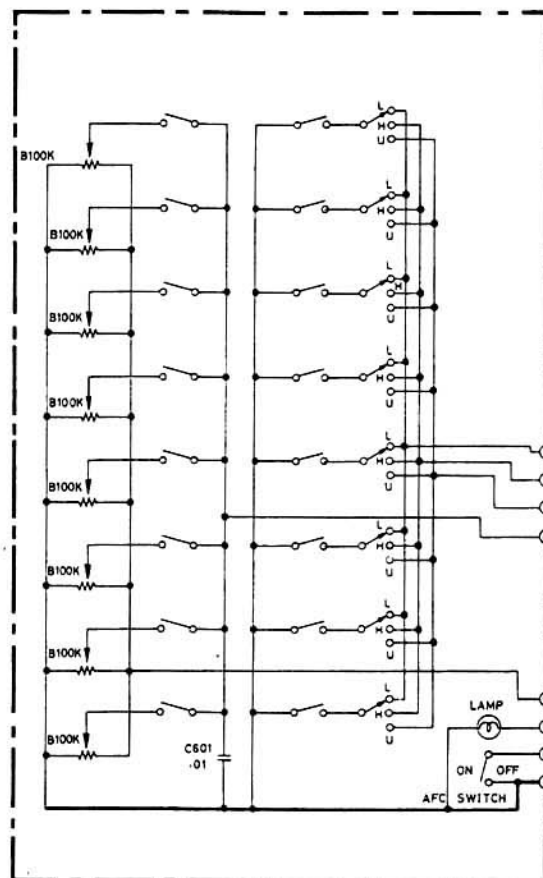


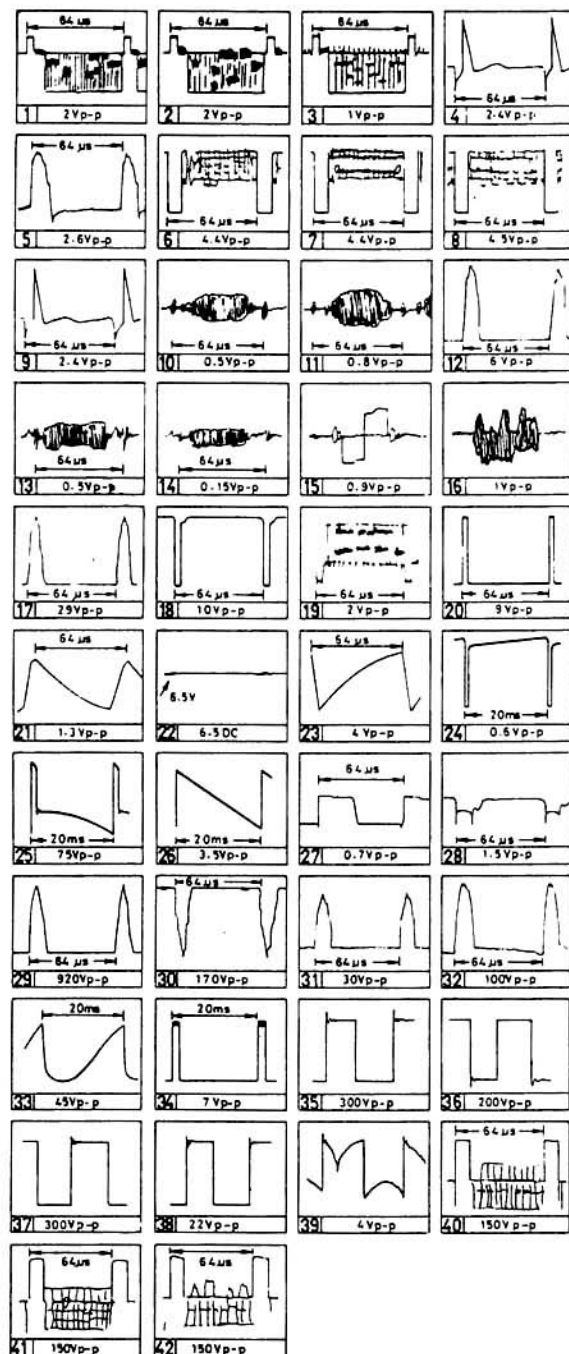

NOTE:

1. ALL CAPACITORS ARE IN μF UNLESS OTHERWISE NOTED (PF= μF)
2. ALL CAPACITORS ARE 50V UNLESS OTHERWISE NOTED.
3. CAPACITORS NOT SPECIFICALLY DESIGNATED ARE CERAMIC CAPACITORS.
- 2a. ELECTROLYTIC CAPACITOR.
- 2b. BI-POLAR ELECTROLYTIC CAPACITOR
- 2c. TANTALUM CAPACITOR
- 2d. METALLIZED POLYESTER.
- 2e. MYLAR CAPACITOR
- 2f. POLYESTER FILM CAPACITOR
- 2g. POLYPROPYLENE CAPACITOR.
- 2h. POLYSTYRENE CAPACITOR.
3. ALL RESISTORS ARE IN OHMS $\frac{1}{4}$ WATT UNLESS OTHERWISE NOTED
4. RESISTORS NOT SPECIFICALLY DESIGNATED ARE CARBON FILM RESISTOR.
- 4a. NONFLAMBLE RESISTOR.
- 4b. FUSEBLE RESISTOR
- 4c. CEMENTED RESISTOR
- 4d. METAL OXIDE RESISTOR.
- 4e. THERMISTOR
5. DC VOLTAGE ARE MEASURED FROM POINTS INDICATED TO THE CIRCUIT GROUND WITH A VTVM
6. WAVEFORMS ARE TAKEN WITH SETTING CONTROLS TO A NORMAL PICTURE CONDITIONS
7. THIS CIRCUIT DIAGRAM IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

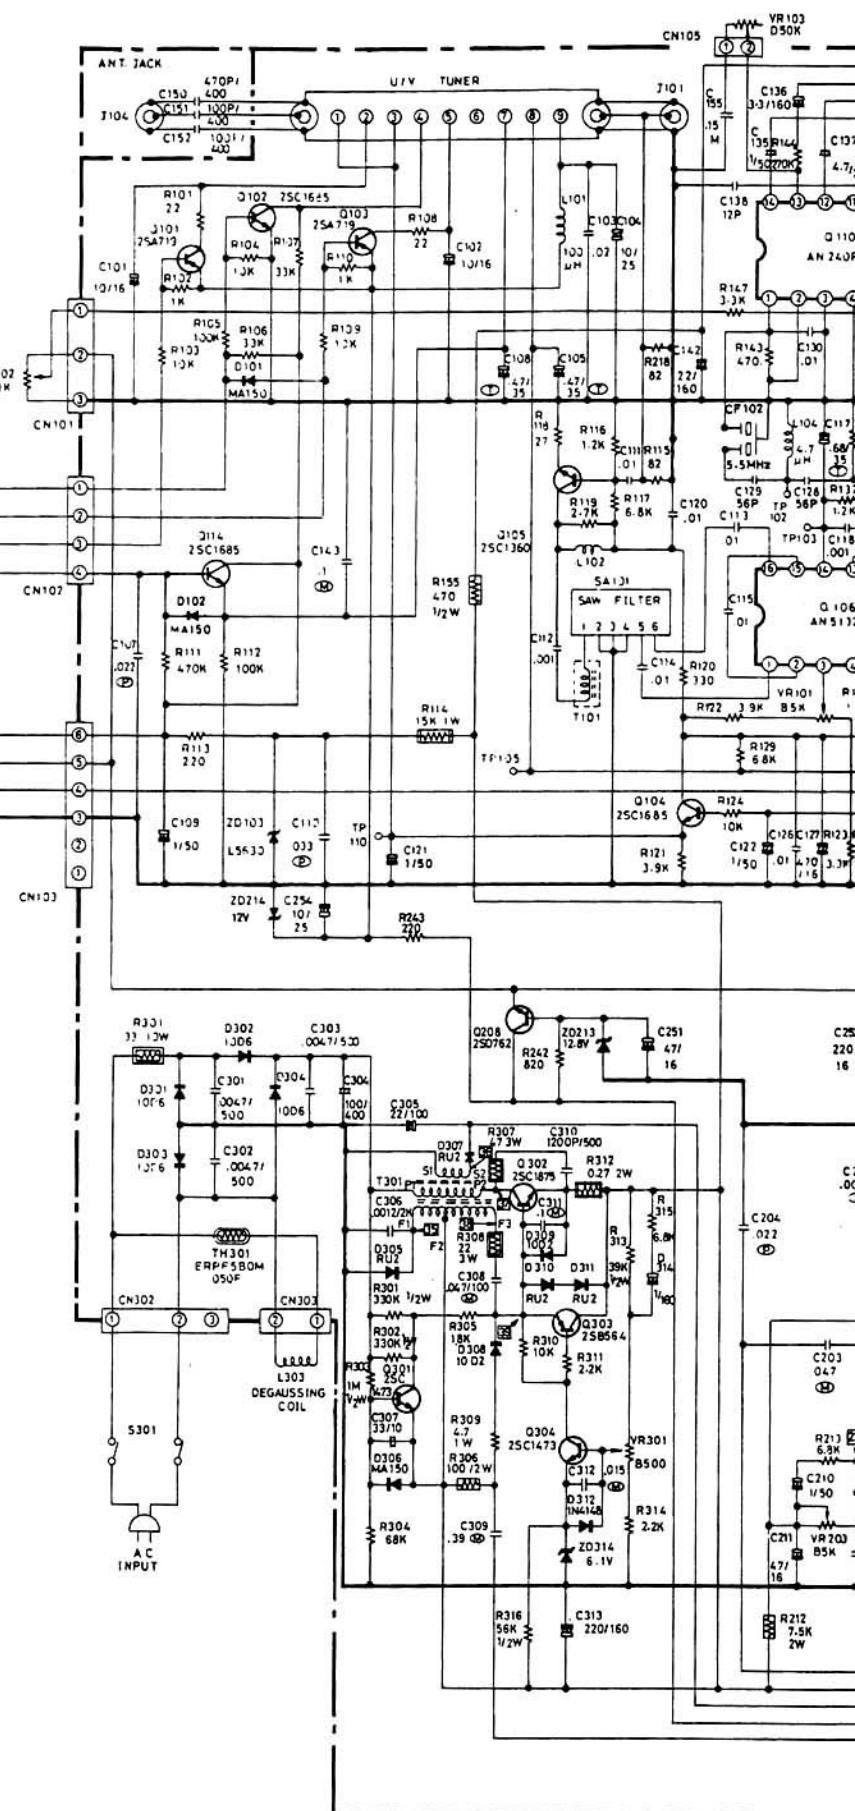

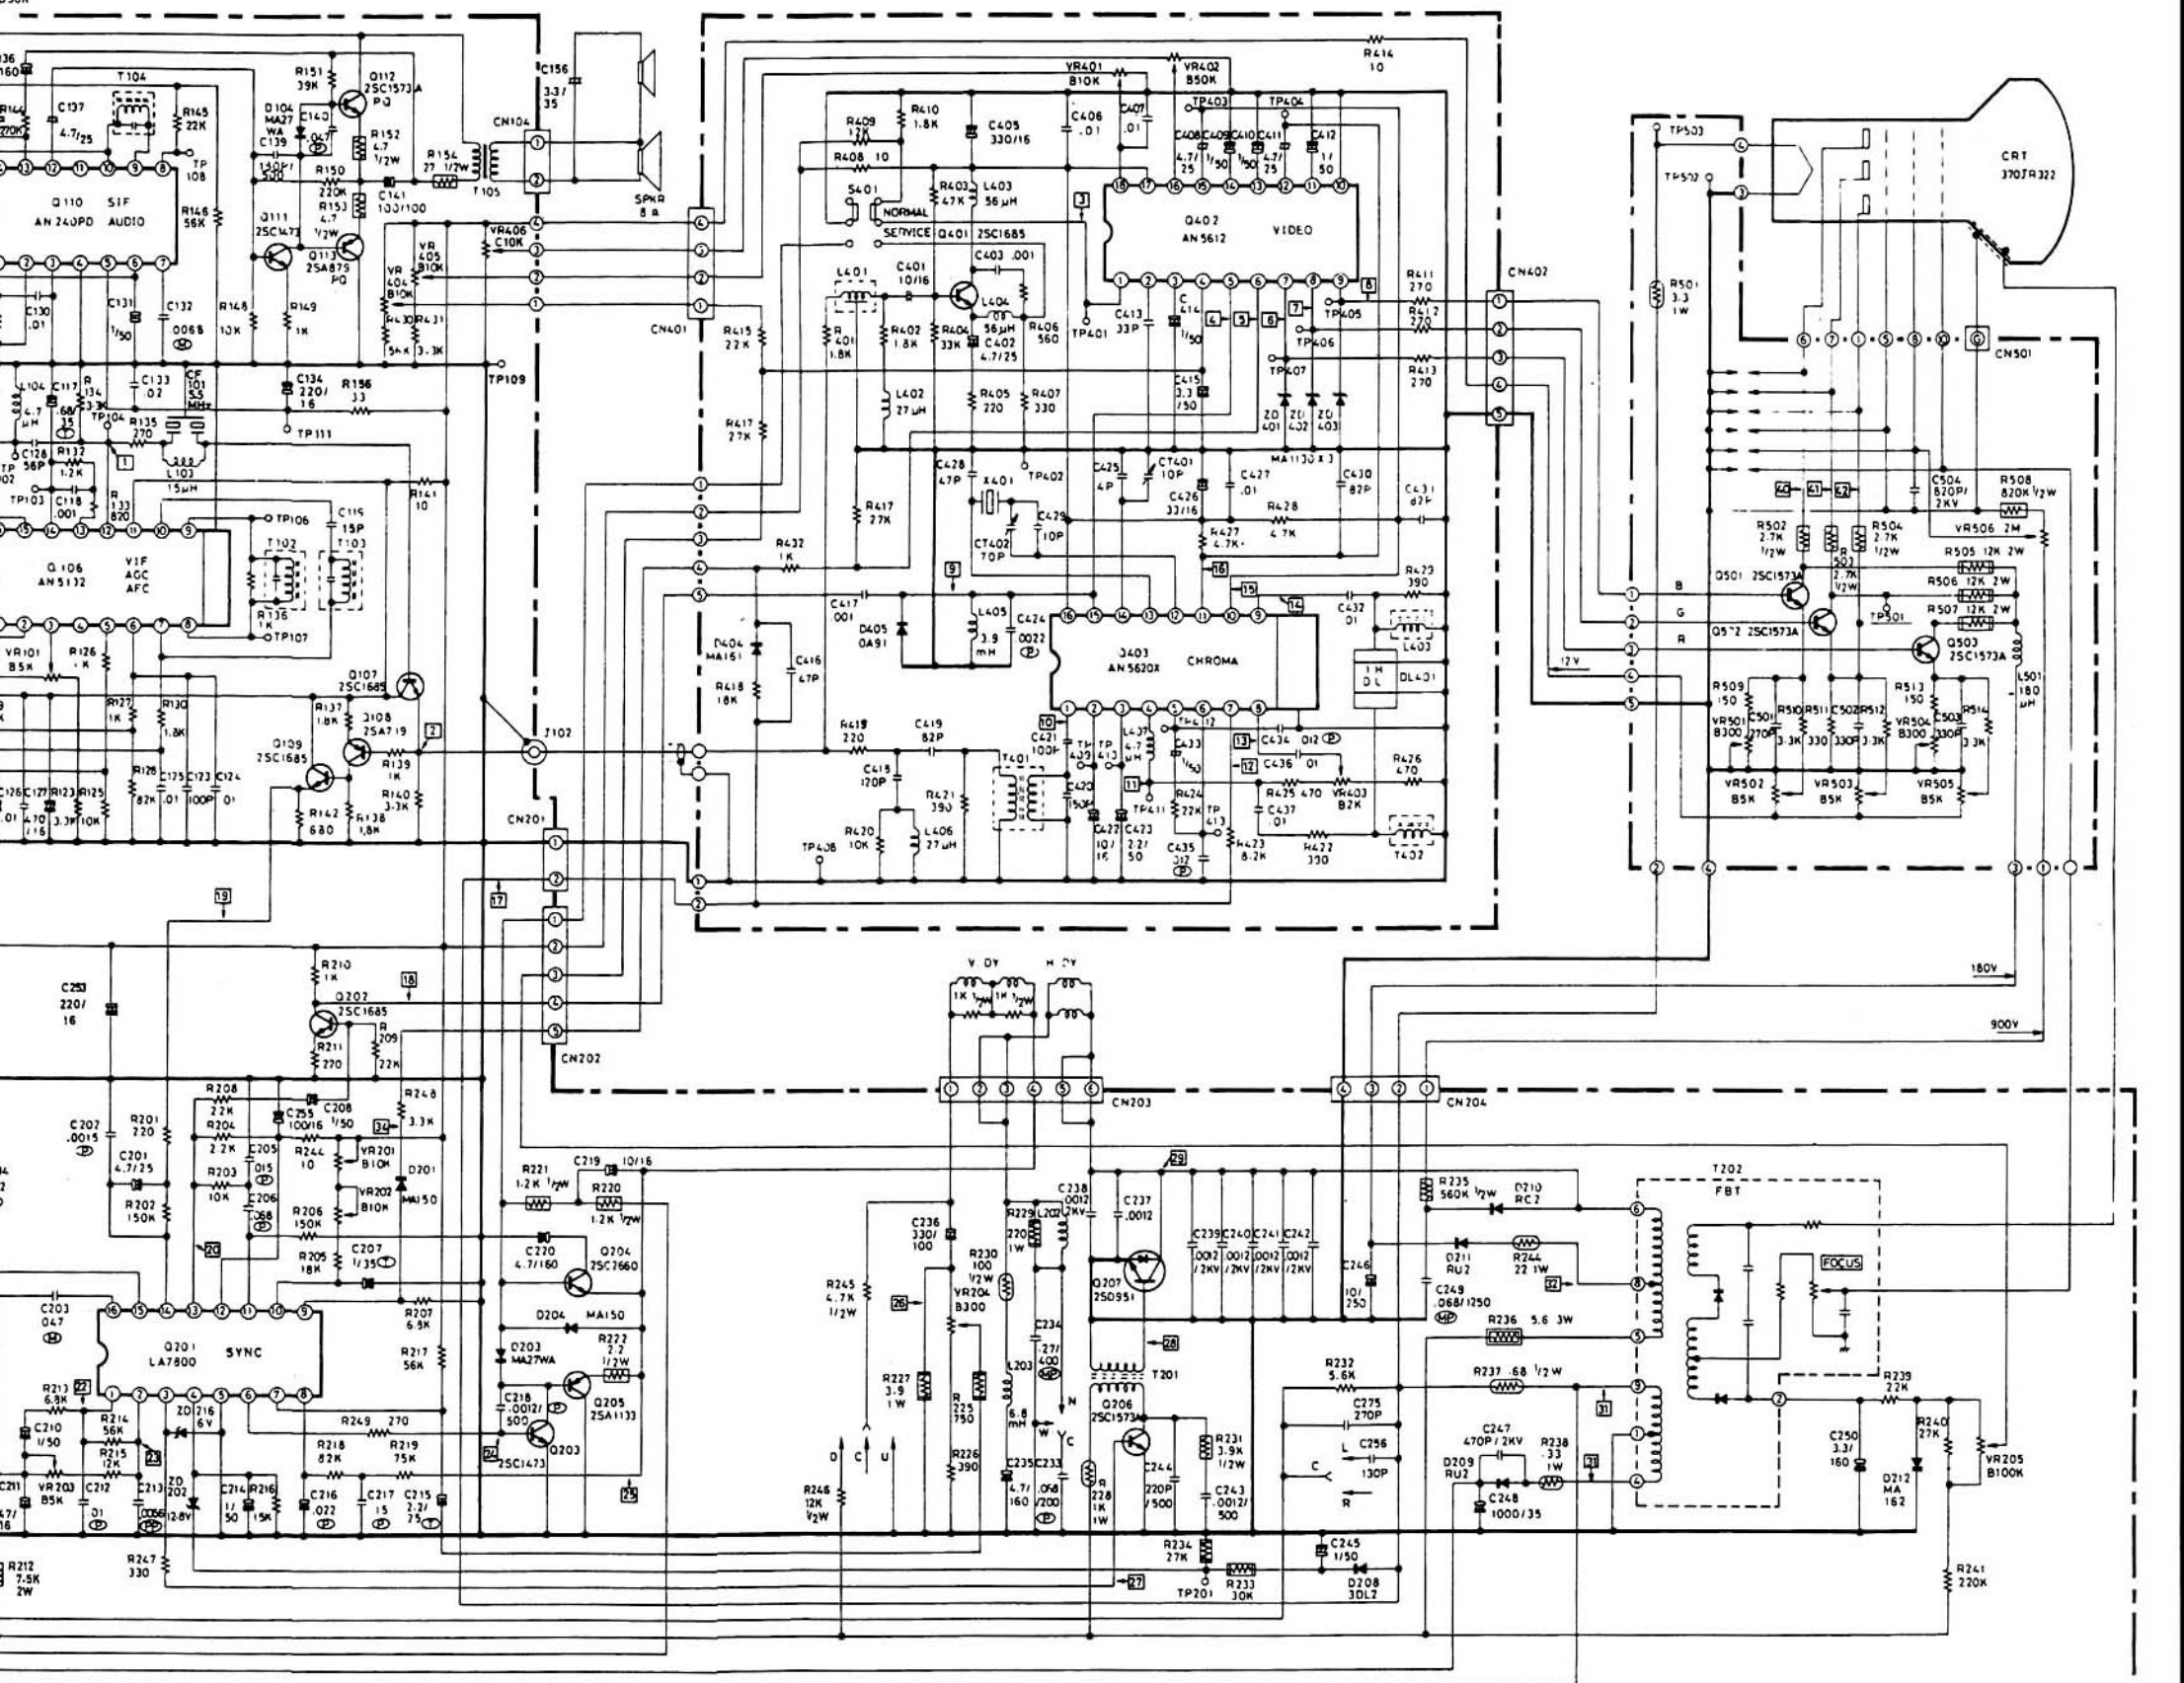

SCHEMATIC DIAGRAM OF TUNER FOR SYSTEM PAL-1 (U.K.)

