
3 - Alignment instructions

3-1 Microcontroller configuration : Service mode

To switch the TV set into service mode please see instruction below.

- 1 - Select pr. number 91
- 2 - Adjust sharpness to minimum and exit all menu.
- 3 - Quickly press the key sequence : **RED - GREEN - menu**

To software version is displayed beside the word Service, e.g. “ SERVICE V1.00A ”.


To exit SERVICE menu press **menu** key or **Std By** key.

3-2 Service mode navigation

- Pr Up / Down remote keys : cycle through the service items available.
Vol- / + remote keys : Decrement / Increment the values within range.
0~7 digit keys : Toggle bits 0~7 in option byte

Order	Item	Default settingh for wp 895
1	PARABOLA	+140
2	HOR WIDTH	-1100
3	CORNER	-80
4	HOR.PARAL	-1
5	V.LINEAR	-2
6	EW TRAPEZ	-12
7	S CORRECT	-15
8	H BOW	+100
9	VERT SIZE	+145
10	VERT CENT	+3939
11	RED GAIN	+92
12	GRN GAIN	+87
13	BLUE GAIN	+95
14	RED BIAS	+128
15	GRN BIAS	+128
16	HOR CEN	98
17	AGC LEVEL	-
18	G2-SCREEN	-
19	AFT	-
20	OPTION	-
21	MAXV OL	Not used

SCHEMATIC DIAGRAM (WP-895 / CP885)

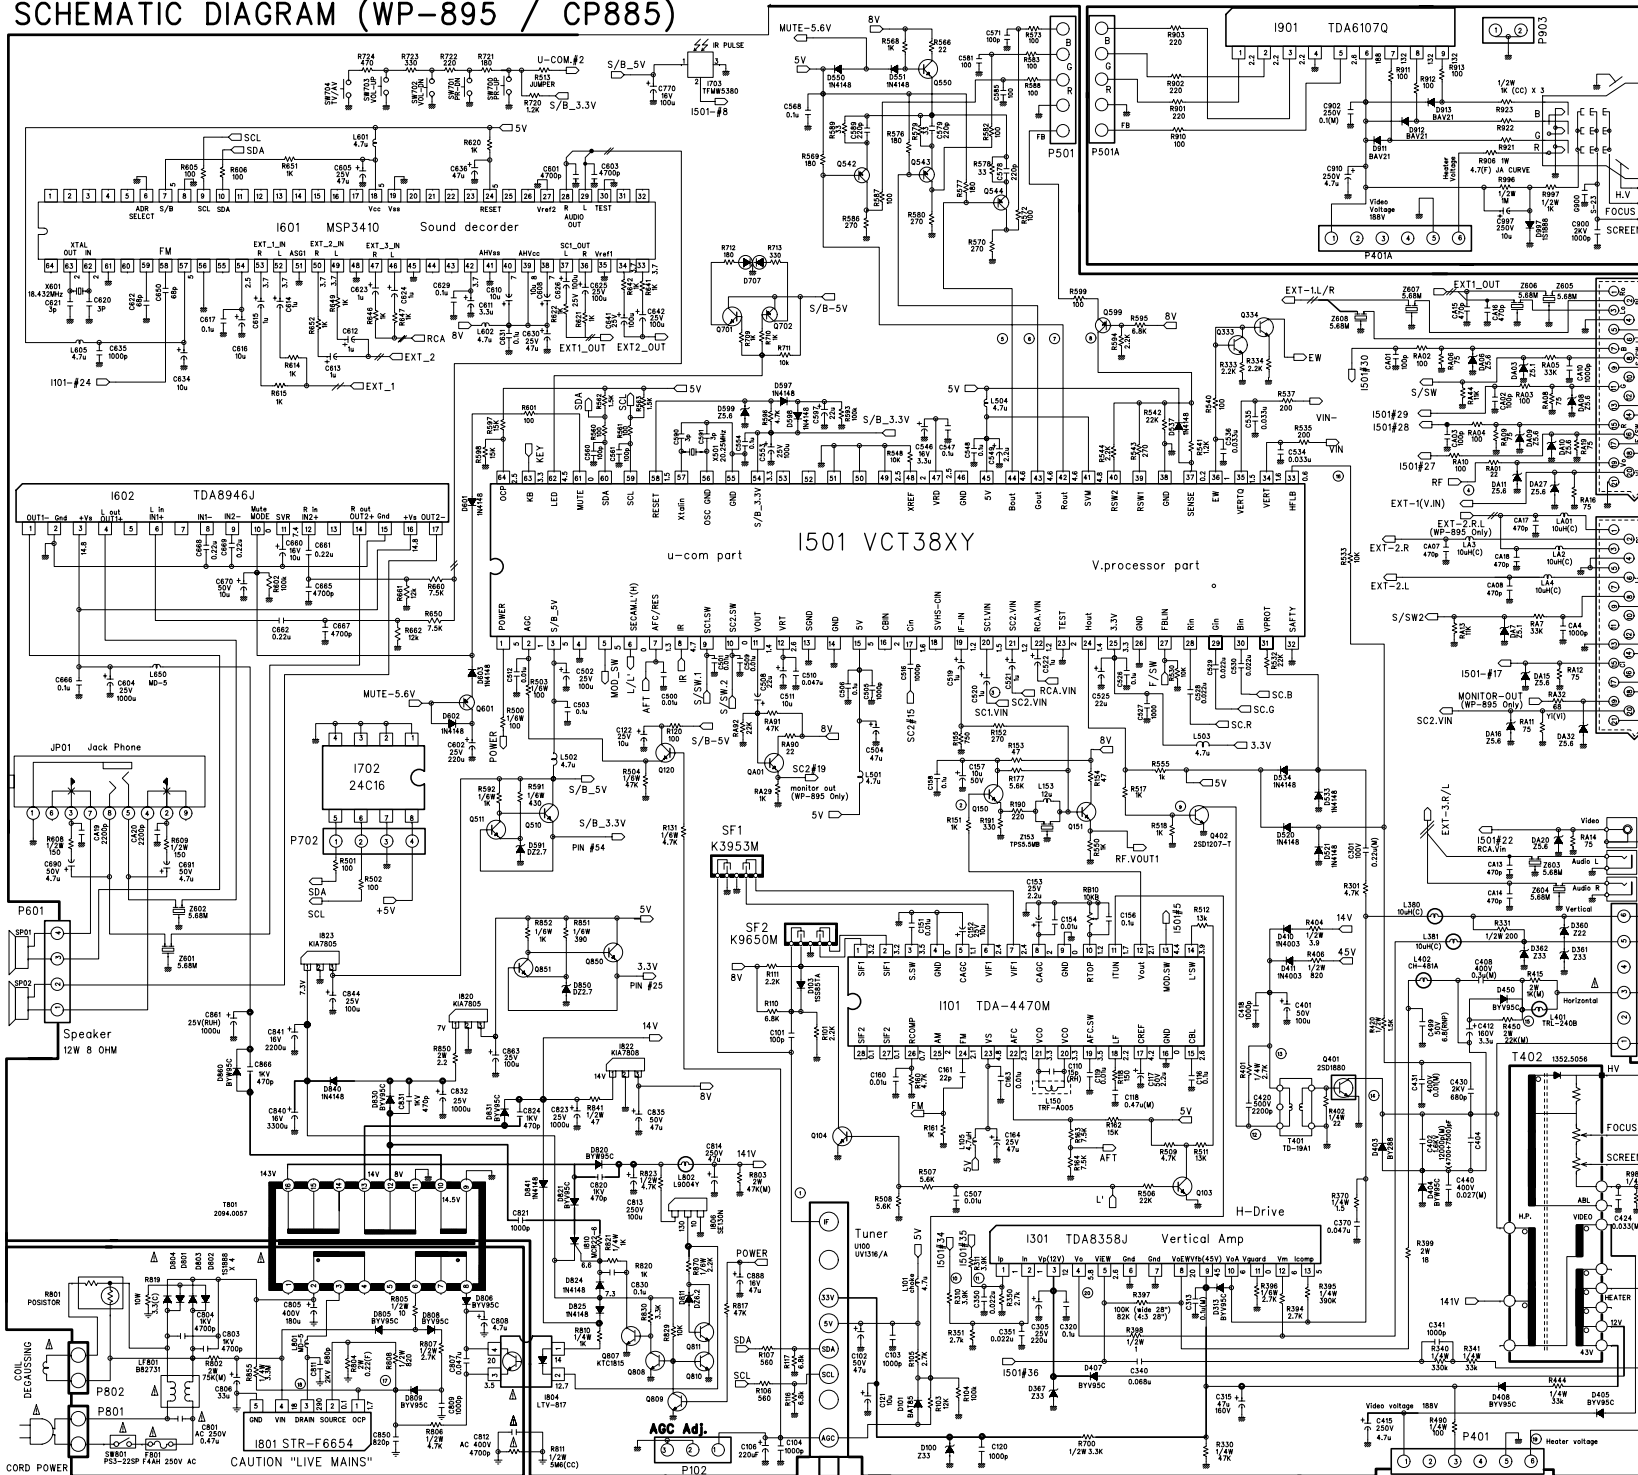

- NOTE:**
1. RESISTANCE IS SHOWN IN OHM. K=1000, M=1000000.
 2. UNLESS OTHERWISE NOTED IN SCHEMATIC ALL CAPACITOR VALUES ARE EXPRESSED IN UF.
 3. VOLTAGES READ WITH "VTVM" FROM POINT INDICATED TO CHASSIS GROUND USING A COLOR BAR SIGNAL WITH ALL CONTROLS AT NORMAL LINE 230V AC VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY +20% EXCEPT H.V.
 4. THIS CIRCUIT DIAGRAM IS A STANDARD ONE CIRCUIT PRINTED MAY BE SUBJECT TO CHANGE FOR PRODUCT IMPROVEMENT WITHOUT PRIOR NOTICE

WARNING:
BEFORE SERVICING THE CHASSIS, READ "X-RAY RADIATION", "SAFETY PRECAUTION", AND "PRODUCT SAFETY NOTICE" IN SERVICE MANUAL


CAUTION TO SERVICE TECHNICIANS:
BEFORE RETURNING THE RECEIVER TO CUSTOMER, LEAKAGE CURRENT OR RESISTANCE MEASUREMENTS SHOULD BE PERFORMED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT.

RESISTOR	CAPACITOR	COIL
CARBON FILM	WV	ELECTRO
S.M.-CODE	WV (M)	CERAMIC
CARBON COMP.	WV (CC)	CERAMIC CH
FUSIBLE	WV (F)	ELECTRO NONPOLAR
CEMENT	WV (C)	MYLAR
		BEAD

THE DIFFERENT PARTS FOR CRT

LOC.	28" WIDE PHILIPS	28" WIDE LG	28"/25" PHILIPS	28"/25" THOMSON
C408	400V 0.5u(M)	400V 0.5u (M)	400V 0.5u (M)	400V 0.5u(M)
L401	TRL-240B	TRL-4000E	TRL-330	TRL-330
R310	3.9K	2.4K	3.3K	2.2K
R311	3.9K	2.4K	3.3K	2.2K
R312	3.9K	2.4K	3.3K	2.2K
R313	2.7K	4.3K	3.3K	4.3K
R314	2.7K	4.3K	3.3K	4.3K
R315	1/2W 200	1/2W 200	1/2W 200	1/2W 200
R316	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R317	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R318	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R319	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R320	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R321	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R322	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R323	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R324	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R325	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R326	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R327	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R328	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R329	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R330	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R331	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R332	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R333	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R334	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R335	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R336	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R337	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R338	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R339	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R340	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R341	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R342	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R343	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R344	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R345	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R346	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R347	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R348	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R349	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R350	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R351	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R352	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R353	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R354	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R355	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R356	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R357	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R358	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R359	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R360	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R361	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R362	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R363	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R364	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R365	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R366	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R367	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R368	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R369	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R370	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R371	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R372	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R373	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R374	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R375	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R376	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R377	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R378	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R379	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R380	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R381	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R382	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R383	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R384	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R385	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R386	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R387	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R388	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R389	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R390	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R391	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R392	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R393	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R394	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R395	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R396	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R397	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R398	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R399	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R400	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R401	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R402	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R403	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R404	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R405	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R406	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R407	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R408	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R409	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R410	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R411	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R412	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R413	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R414	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R415	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R416	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R417	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R418	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R419	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R420	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R421	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R422	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R423	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R424	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R425	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R426	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R427	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R428	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R429	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R430	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R431	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R432	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R433	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R434	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R435	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R436	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R437	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R438	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R439	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R440	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R441	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R442	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R443	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R444	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R445	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R446	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R447	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R448	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R449	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R450	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R451	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R452	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R453	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R454	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R455	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R456	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R457	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R458	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R459	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R460	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R461	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R462	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R463	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R464	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R465	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R466	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R467	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R468	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R469	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R470	1W 4.7uA (F)	1W 4.7uA (F)	1W 2.4 JA (F)	1W 1uA(F)
R471	1W 4.7uA (			

SCHEMATIC DIAGRAM (WP-895F/CP-885F)

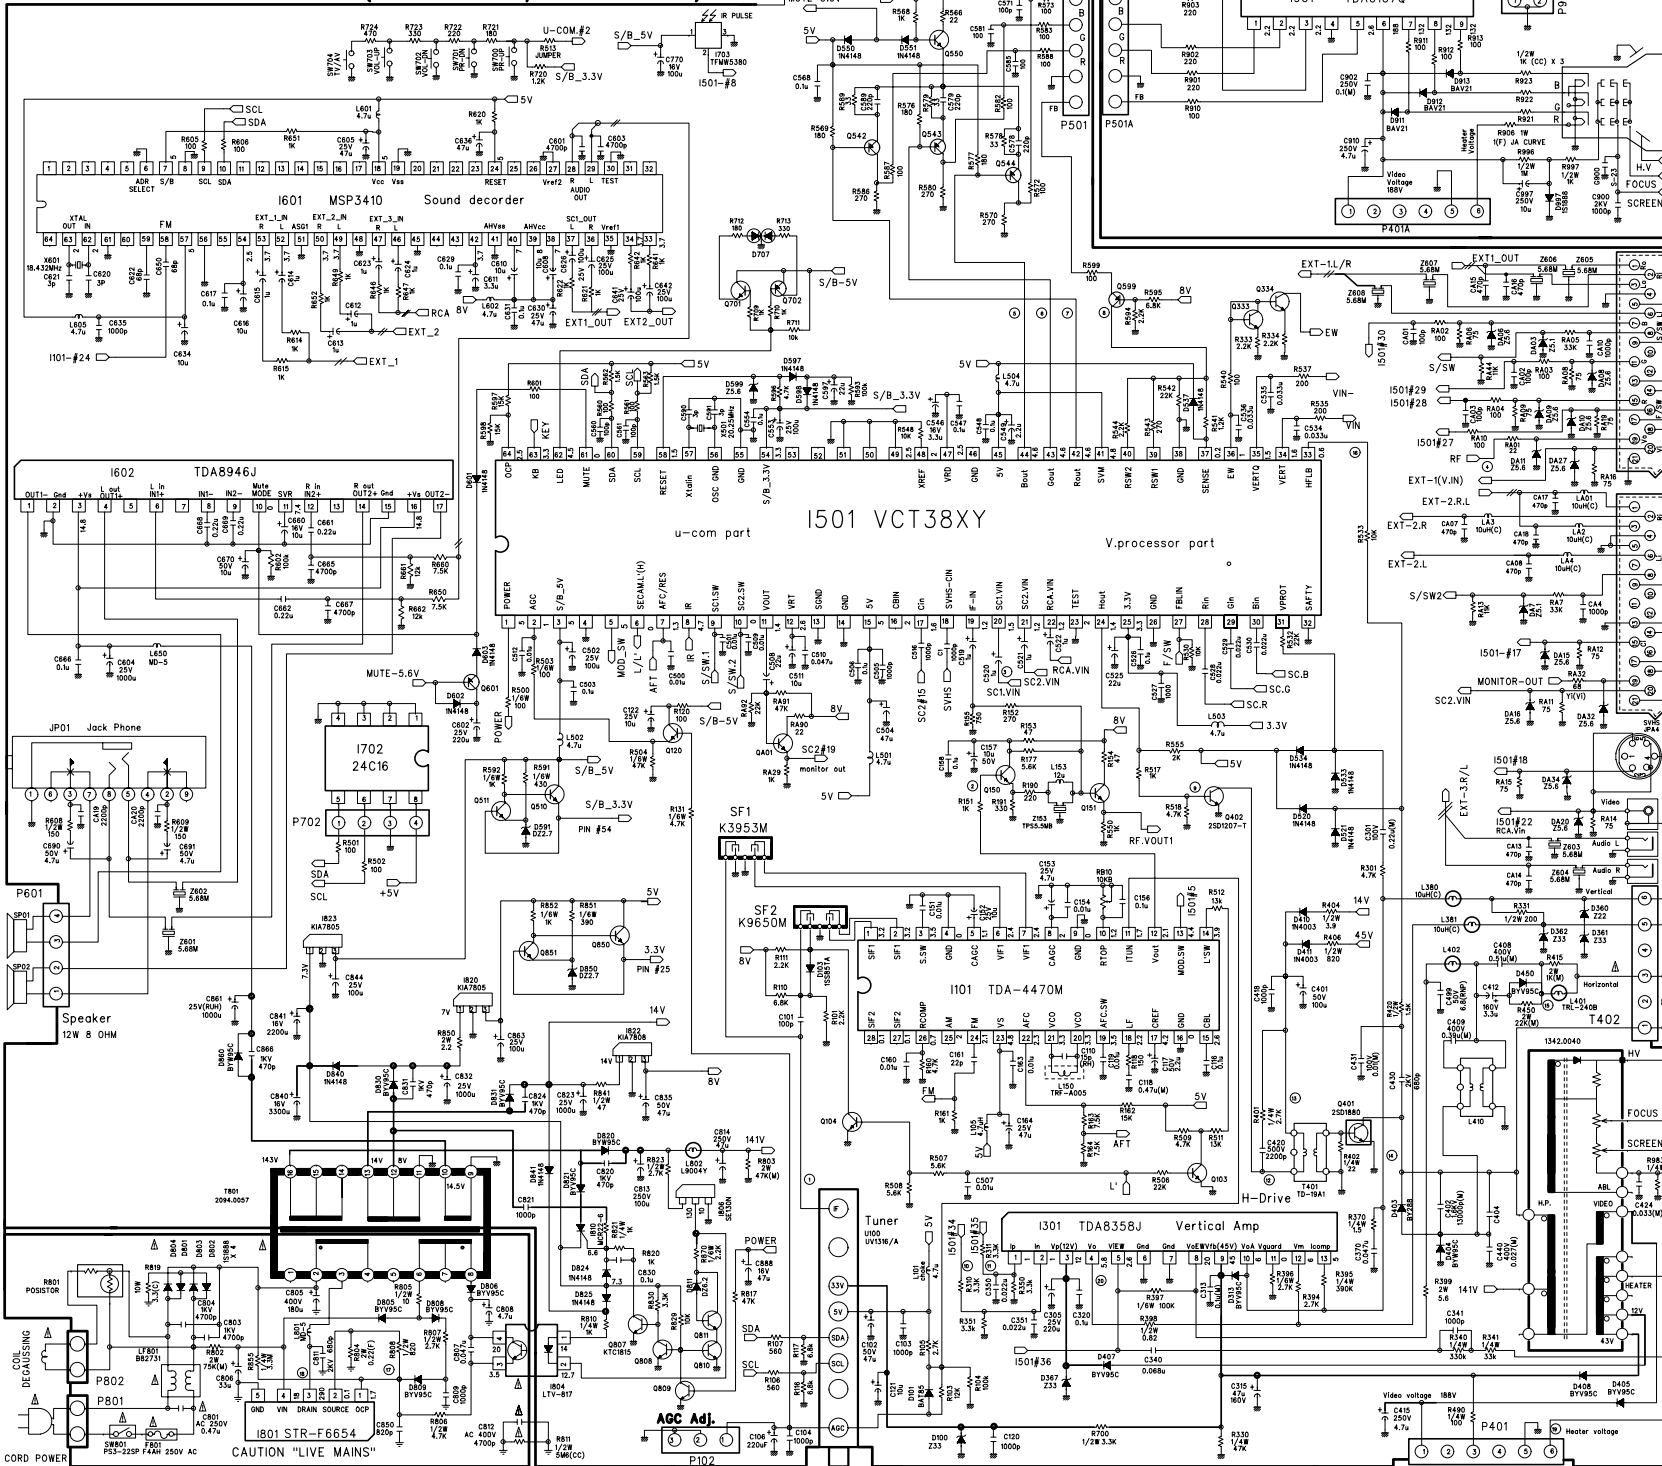

NOTE:

1. RESISTANCE IS SHOWN IN OHM. K=1000, M=1000000
2. UNLESS OTHERWISE NOTED IN SCHEMATIC ALL CAPACITOR VALUES ARE EXPRESSED IN μF
3. VOLTAGES READ WITH "VTVM" FROM POINT INDICATED TO CHASSIS GROUND USING A COLOR BAR SIGNAL WITH ALL CONTROLS AT NORMAL LINE 230V AC VOLTAGE READINGS SHOWN ARE NORMAL VALUES AND MAY VARY $\pm 20\%$ EXCEPT H.V.
4. THIS CIRCUIT DIAGRAM IS A STANDARD ONE CIRCUIT PRINTED MAY BE SUBJECT TO CHANGE FOR PRODUCT IMPROVEMENT WITHOUT PRIOR NOTICE

WARNING:

BEFORE SERVICING THE CHASSIS, READ "X-RAY RADIATION", "SAFETY PRECAUTION", AND "PRODUCT SAFETY NOTICE" IN SERVICE MANUAL


CAUTION TO SERVICE TECHNICIANS:

BEFORE RETURNING THE RECEIVER TO CUSTOMER, LEAKAGE CURRENT QR RESISTANCE MEASUREMENTS SHOULD BE PERFORMED TO DETERMINE THAT EXPOSED PARTS ARE PROPERLY INSULATED FROM THE SUPPLY CIRCUIT.

RESISTOR	CAPACITOR	COIL
CARBON FILM	ELECTRO	PEAKING
R M-OXIDE	CERAMIC	CHOKE
CARBON COMP	CERAMIC CH	BEAD
FUSIBLE	ELECTRO NONPOLAR	
CEMENT	MYLAR	

THE DIFFERENT PARTS FOR CRT

LOC.	28" WIDE THOMSON	28" 4:3 THOMSON
C409	400V 0.39u (M)	400V 0.39u (M)
L401	TL-240B	TL-400DE
R387	100K	82K
R350	3.3K	2.7K
R351	3.3K	2.7K
R310	3.3K	3.3K
R311	3.3K	3.9K
R389	2W 6.8	2W 5.6
R908	1W 1A (F)	1W 1A (F)
V901	WECC070101	AME220101
T402	1M2.5018	1M2.5019

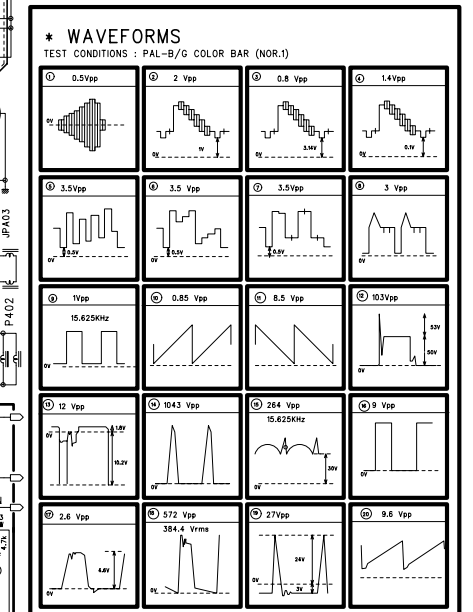

(MAY/2001)

S/N : 4859805193-00

PRODUCT SAFETY NOTE :

THE COMPONENTS MARKED WITH Δ ARE IMPORTANT FOR MAINTAINING THE SAFETY OF THE SET AND SHOULD BE REPLACED ONLY WITH TYPES IDENTICAL TO THOSE IN THE ORIGINAL OR SPECIFIED ONE IN THE PART LIST. DON'T DEGRADE THE SAFETY OF THE SET THROUGH IMPROPER SERVICING.