



LG

website:<http://biz.LGservice.com>
e-mail:<http://www.LGEservice.com/techsup.html>


COLOR TV **SERVICE MANUAL**

CHASSIS : MP-015A

MODEL : PT-53A83T

CAUTION

BEFORE SERVICING THE CHASSIS,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.

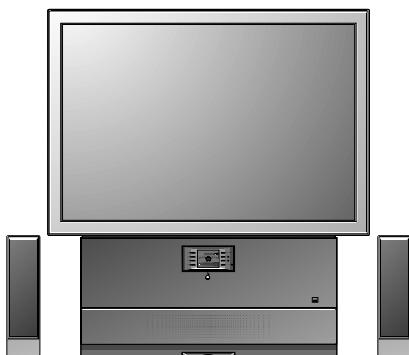

CONTENTS

Contents	2
Safety Precautions	3
Servicing Precautions	4
Specifications	6
Control Descriptions	8
Adjustment.....	11
Troubleshooting	18
Block Diagram	26
Printed Circuit Board	30
Wiring Diagram.....	42
Exploded View	44
Exploded View Parts List.....	45
Replacement Parts List	46
SVC. Sheet	

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by Δ in the Schematic Diagram and Replacement Parts List.
It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards.
Do not modify the original design without permission of manufacturer.

General Guidance

An **Isolation Transformer** should always be used during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this TV receiver is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

Due to high vacuum and large surface area of picture tube, extreme care should be used in **handling the Picture Tube**. Do not lift the Picture tube by its Neck.

X-RAY Radiation

Warning:

The source of X-RAY RADIATION in this TV receiver is the High Voltage Section and the Picture Tube.
For continued X-RAY RADIATION protection, the replacement tube must be the same type tube as specified in the Replacement Parts List.

To determine the presence of high voltage, use an accurate high impedance HV meter.

Adjust brightness, color, contrast controls to minimum.

Measure the high voltage.

The meter reading should indicate

23.5 ; 1.5KV: 14-19 inch, 26 ; 15KV: 19-21 inch,
29.0 ; 1.5KV: 25-29 inch, 30.0 ; 1.5KV: 32 inch

If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.

Before returning the receiver to the customer,

always perform an **AC leakage current check** on the exposed metallic parts of the cabinet, such as antennas, terminals, etc., to be sure the set is safe to operate without damage of electrical shock.

Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between $1M\Omega$ and $5.2M\Omega$.

When the exposed metal has no return path to the chassis the reading must be infinite.

An other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.


Do not use a line Isolation Transformer during this check.
Connect 15K/10watt resistor in parallel with a 0.15uF capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which corresponds to 0.5mA.

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

Leakage Current Hot Check circuit

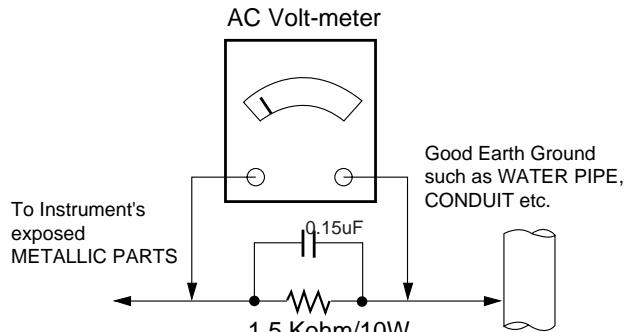

SERVICING PRECAUTIONS

CAUTION: Before servicing receivers covered by this service manual and its supplements and addenda, read and follow the **SAFETY PRECAUTIONS** on page 3 of this publication.

NOTE: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions on page 3 of this publication, always follow the safety precautions. Remember: Safety First.

General Servicing Precautions

1. Always unplug the receiver AC power cord from the AC power source before;
 - a. Removing or reinstalling any component, circuit board module or any other receiver assembly.
 - b. Disconnecting or reconnecting any receiver electrical plug or other electrical connection.
 - c. Connecting a test substitute in parallel with an electrolytic capacitor in the receiver.
- CAUTION:** A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.
- d. Discharging the picture tube anode.
2. Test high voltage only by measuring it with an appropriate high voltage meter or other voltage measuring device (DVM, FETVOM, etc) equipped with a suitable high voltage probe. Do not test high voltage by "drawing an arc".
3. Discharge the picture tube anode only by (a) first connecting one end of an insulated clip lead to the degaussing or kine aquadag grounding system shield at the point where the picture tube socket ground lead is connected, and then (b) touch the other end of the insulated clip lead to the picture tube anode button, using an insulating handle to avoid personal contact with high voltage.
4. Do not spray chemicals on or near this receiver or any of its assemblies.
5. Unless specified otherwise in this service manual, clean electrical contacts only by applying the following mixture to the contacts with a pipe cleaner, cotton-tipped stick or comparable nonabrasive applicator; 10% (by volume) Acetone and 90% (by volume) isopropyl alcohol (90%-99% strength)

CAUTION: This is a flammable mixture.

Unless specified otherwise in this service manual, lubrication of contacts is not required.

6. Do not defeat any plug/socket B+ voltage interlocks with which receivers covered by this service manual might be equipped.
7. Do not apply AC power to this instrument and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
8. Always connect the test receiver ground lead to the receiver chassis ground before connecting the test receiver positive lead.

Always remove the test receiver ground lead last.

9. *Use with this receiver only the test fixtures specified in this service manual.*

CAUTION: Do not connect the test fixture ground strap to any heatsink in this receiver.

Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called *Electrostatically Sensitive (ES) Devices*. Examples of typical ES devices are integrated circuits and some field-effect

transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed to prevent potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static type solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION: Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

General Soldering Guidelines

1. Use a grounded-tip, low-wattage soldering iron and appropriate tip size and shape that will maintain tip temperature within the range of 500 °F to 600 °F.
2. Use an appropriate gauge of RMA resin-core solder composed of 60 parts tin/40 parts lead.
3. Keep the soldering iron tip clean and well tinned.
4. Thoroughly clean the surfaces to be soldered. Use a small wirebristle (0.5 inch, or 1.25cm) brush with a metal handle. Do not use freon-propelled spray-on cleaners.
5. Use the following unsoldering technique
 - a. Allow the soldering iron tip to reach normal temperature. (500 °F to 600 °F)
 - b. Heat the component lead until the solder melts.
 - c. Quickly draw the melted solder with an anti-static, suction-type solder removal device or with solder braid.
- CAUTION:** Work quickly to avoid overheating the circuit board printed foil.
6. Use the following soldering technique
 - a. Allow the soldering iron tip to reach a normal temperature (500 °F to 600 °F)
 - b. First, hold the soldering iron tip and solder the strand against the component lead until the solder melts.

- c. Quickly move the soldering iron tip to the junction of the component lead and the printed circuit foil, and hold it there only until the solder flows onto and around both the component lead and the foil.
- CAUTION:** Work quickly to avoid overheating the circuit board printed foil.
- d. Closely inspect the solder area and remove any excess or splashed solder with a small wire-bristle brush.

IC Remove/Replacement

Some chassis circuit boards have slotted holes (oblong) through which the IC leads are inserted and then bent flat against the circuit foil. When holes are the slotted type, the following technique should be used to remove and replace the IC. When working with boards using the familiar round hole, use the standard technique as outlined in paragraphs 5 and 6 above.

Removal

1. Desolder and straighten each IC lead in one operation by gently prying up on the lead with the soldering iron tip as the solder melts.
2. Draw away the melted solder with an anti-static suction-type solder removal device (or with solder braid) before removing the IC.

Replacement

1. Carefully insert the replacement IC in the circuit board.
2. Carefully bend each IC lead against the circuit foil pad and solder it.
3. Clean the soldered areas with a small wire-bristle brush. (It is not necessary to reapply acrylic coating to the areas).

"Small-Signal" Discrete Transistor

Removal/Replacement

1. Remove the defective transistor by clipping its leads as close as possible to the component body.
2. Bend into a "U" shape the end of each of three leads remaining on the circuit board.
3. Bend into a "U" shape the replacement transistor leads.
4. Connect the replacement transistor leads to the corresponding leads extending from the circuit board and crimp the "U" with long nose pliers to insure metal to metal contact then solder each connection.

Power Output, Transistor Device

Removal/Replacement

1. Heat and remove all solder from around the transistor leads.
2. Remove the heatsink mounting screw (if so equipped).
3. Carefully remove the transistor from the heat sink of the circuit board.
4. Insert new transistor in the circuit board.
5. Solder each transistor lead, and clip off excess lead.
6. Replace heatsink.

Diode Removal/Replacement

1. Remove defective diode by clipping its leads as close as possible to diode body.
2. Bend the two remaining leads perpendicular to the circuit board.
3. Observing diode polarity, wrap each lead of the new diode around the corresponding lead on the circuit board.
4. Securely crimp each connection and solder it.
5. Inspect (on the circuit board copper side) the solder joints of the two "original" leads. If they are not shiny, reheat them and if necessary, apply additional solder.

Fuse and Conventional Resistor

Removal/Replacement

1. Clip each fuse or resistor lead at top of the circuit board hollow stake.
 2. Securely crimp the leads of replacement component around notch at stake top.
 3. Solder the connections.
- CAUTION:** Maintain original spacing between the replaced component and adjacent components and the circuit board to prevent excessive component temperatures.

Circuit Board Foil Repair

Excessive heat applied to the copper foil of any printed circuit board will weaken the adhesive that bonds the foil to the circuit board causing the foil to separate from or "lift-off" the board. The following guidelines and procedures should be followed whenever this condition is encountered.

At IC Connections

To repair a defective copper pattern at IC connections use the following procedure to install a jumper wire on the copper pattern side of the circuit board. (Use this technique only on IC connections).

1. Carefully remove the damaged copper pattern with a sharp knife. (Remove only as much copper as absolutely necessary).
2. Carefully scratch away the solder resist and acrylic coating (if used) from the end of the remaining copper pattern.
3. Bend a small "U" in one end of a small gauge jumper wire and carefully crimp it around the IC pin. Solder the IC connection.
4. Route the jumper wire along the path of the out-away copper pattern and let it overlap the previously scraped end of the good copper pattern. Solder the overlapped area and clip off any excess jumper wire.

At Other Connections

Use the following technique to repair the defective copper pattern at connections other than IC Pins. This technique involves the installation of a jumper wire on the component side of the circuit board.

1. Remove the defective copper pattern with a sharp knife. Remove at least 1/4 inch of copper, to ensure that a hazardous condition will not exist if the jumper wire opens.
 2. Trace along the copper pattern from both sides of the pattern break and locate the nearest component that is directly connected to the affected copper pattern.
 3. Connect insulated 20-gauge jumper wire from the lead of the nearest component on one side of the pattern break to the lead of the nearest component on the other side. Carefully crimp and solder the connections.
- CAUTION:** Be sure the insulated jumper wire is dressed so it does not touch components or sharp edges.

SPECIFICATIONS

NOTE : Specifications and others are subject to change without notice for improvement.

● **Video input system:**

Multi 26 System
(Refer to Table 1)

● **Intermediate Frequency**

Vision IF : 38.9MHz	*SECAM : (38.9-4.25MHz 35.32MHz(M))
Color IF : 34.47MHz	
Sound IF : 33.4MHz(B/G) 32.9MHz(I) 32.4MHz(D/K,K1) 34.4MHz(M)	

● **Power consumption :**

250 Wmax.

● **Tuning system :**

FVS 100 Program Memory(With Teletext Model)
FVS 200 Program Memory(W/O Teletext Model)

● **Sound output :**

R,L Out : 10 W+10W(48,53"),20W+20W(43")
Center : 10W(Optional)
SL/SR : 5W+5W (Optional)

● **Tuning range**

Band	For TV				For CATV	
	B/G	D/K	I/I	NTSC		
VHF-Low	Ch2-4	Ch1-5		Ch2-13	S1-S3', S1	
VHF-High	Ch5-12	Ch6-12	Ch4-13		S2-S10, S11-S20	
Hyper					S21-S41	
UHF	Ch21-69				Ch14-69	

● **OSD (On Screen Display):**

EZ Menu Method

● **Antenna input impedance:** VHF/UHF 75ohm, Unbalanced

● **Voice coil impedance :** 8 ohm

● **External connections :**

AV Input : V/L/R : 1(Side)	Component 1:480i/L/R
V/L/R : 2 (Rear,PT-)	Component 2:480p/L/R
AV Output : V/L/R : 1(Rear,PT-)	S-Video Input : Y/C : 2 (Side 1,Rear 1)
Scart : Full Scart(With RGB Input) : 1	Half Scart : 1(AV In/Out)
Half Scart : 1(AV In/YC In)	Half Scart : 1(AV In/YC In)

● **Function :**

Turbo Sound/Picture
PSM
SSM
Auto Sleep

CATV/Hyper band
Teletext (TOP/FLOP/LIST)-Option
Multi Window PIP

● **Features**

Picture quality improvement circuit
 - YNR (Luminance Noise Reduction)
 - Picture Outline Compensation
 - Digital Comb Filter
 - Color Transition Improvement
 - Dynamic S-VIM
 - Black Stretcher
 - Digital Eye
 - Digital Convergence
 - Digital 100Hz & Progressive
 - Digital Index
 - Dvd Input

Sound quality improvement circuit
 - Pro Logic(48,53")/ Virtual(43")
 - Equalizer

● **Power requirements :**

110-240 Vac, 50/60HZ(PT-)
230 Vac, 50HZ(PE/PL-)


	Specifications
Video in/out	1Vp-p; 3dB, 75ohm
Audio in (2 way)	0.63Vrms; 3dB, over 10Kohm
Audio out (2 way)	0.5Vrms; 3dB, below 1Kohm

Table 1 : Receiving System (26 System)

No	Receiving System	Function	Receiving Channel
1	PAL-B	Reception of broadcast and play-back for Video Tape Recorder	VHF Band PAL/SECAM-B : 2-12 PAL/SECAM-D : 1-12 SECAM-K1 : 2-9 NTSC-M (US) : 2-13 NTSC-M (JAPAN) : 1-12
2	PAL-G		
3	PAL-I		
4	PAL-D		
5	PAL-K		
6	SECAM-B		
7	SECAM-G		
8	SECAM-D		
9	SECAM-K		
10	SECAM-K1		
11	NTSC-M		
12	NTSC 4.43/5.5MHz	Play-back for special Video Tape Recorder	
13	NTSC 4.43/6.0MHz		
14	NTSC 4.43/6.5MHz		
15	SECAM-I (6.0MHz)		
16	SECAM-L (Video In)		
17	NTSC 3.58/4.5MHz/50Hz	Play-back for special Video tape/Video disk player	
18	PAL 5.5MHz/60Hz		
19	PAL 6.0MHz/60Hz		
20	PAL 6.5MHz/60Hz		
21	SECAM 5.5MHz/60Hz		
22	SECAM 6.0MHz/60Hz		
23	SECAM 6.5MHz/60Hz		
24	NTSC 3.58/5.5MHz	Play-back for special Video Tape Recorder	
25	NTSC 3.58/6.0MHz		
26	NTSC 3.58/6.5MHz		

CONTROLS DESCRIPTION

All the functions can be controlled with the remote control handset. Some functions can also be adjusted with the buttons on the front panel of the set.

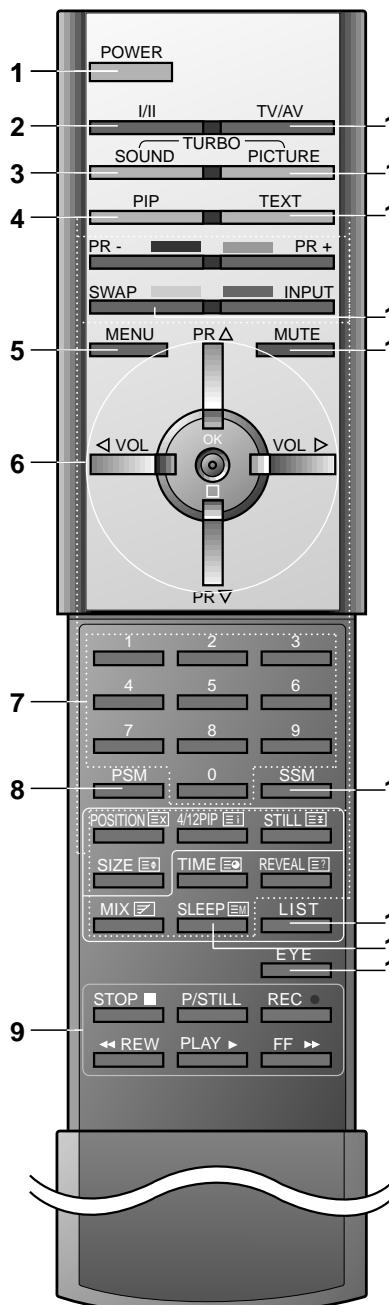

(With TELETEXT)

Remote control handset

Before you use the remote control handset, please install the batteries. See the next page.

11. **POWER**
switches the set on from standby or off to standby.
12. **I/II**
selects the language during dual language broadcast.
selects the sound output.
13. **TURBO SOUND BUTTON**
selects Turbo sound.
14. **PIP BUTTONS**
PIP
switches the sub picture on or off.
PR +/-
selects a programme for the sub picture.
SWAP
alternates between main and sub picture.
INPUT
selects the input mode for the sub picture.
SIZE
adjusts the sub picture size.
STILL
freezes motion of the sub picture.
POSITION
relocates the sub picture in clockwise direction.
4/12 PIP
switches on or off the programme scan mode through 4 or 12 sub pictures .
15. **MENU**
selects a menu.
16. **▲ / ▼ (Programme Up/Down)**
selects a programme or a menu item.
switches the set on from standby.
17. **◀ / ▶ (Volume Up/Down)**
adjusts the volume.
18. **OK**
adjusts menu settings.
accepts your selection or displays the current mode.
19. **NUMBER BUTTONS**
switches the set on from standby or directly select a number.
20. **PSM (Picture Status Memory)**
recalls your preferred picture setting.
21. **VCR BUTTONS**
control a LG video cassette recorder.

10. TV/AV

selects TV or AV mode.
clears the menu / text from the screen.
switches the set on from standby.

11. TURBO PICTURE BUTTON

selects Turbo picture.

12. TELETEXT BUTTONS (option)

These buttons are used for teletext.
For further details, see the 'Teletext' section.

13. SWAP

returns to the previously viewed programme.

14. MUTE

switches the sound on or off.

15. SSM (Sound Status Memory)

recalls your preferred sound setting.

16. LIST

displays the programme table.

17. SLEEP

sets the sleep timer.


18. EYE

switches the eye function on or off.


Note : In teletext mode, the PR +/-, SWAP and INPUT buttons are used for teletext function.

Battery installation

The remote control handset is powered by two AAA type batteries. To load the batteries, turn the remote control handset over and open the battery compartment. Install two batteries as indicated by the polarity symbols (+ and -) marked inside the compartment.

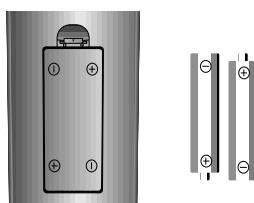


Note : To avoid damage from possible battery leakage, remove the batteries if you do not plan to use the remote control handset for an extended period of time.

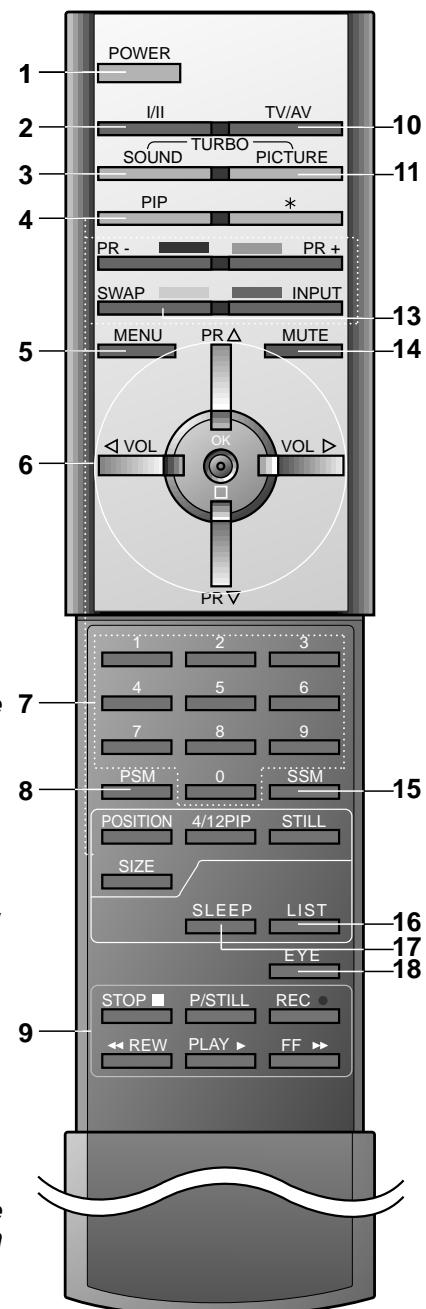



(Without TELETEXT)

Front panel

• PT-48/53A83 series

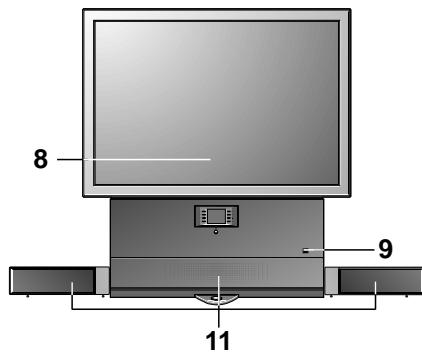

• PT-43A83 series

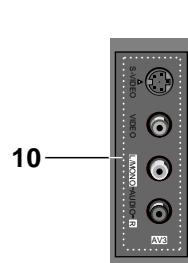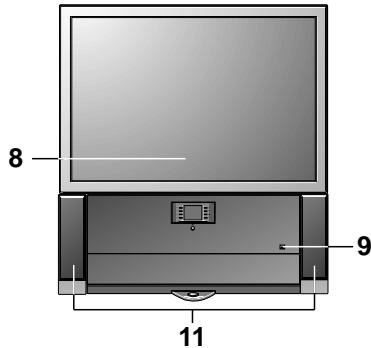


(Side panel)

1. **MAIN POWER (ON/OFF)**
switches the set on or off.
2. **◀ / ▶ (Volume Up/Down)**
adjusts the volume.
adjusts menu settings.
▲ / ▼ (Programme Up/Down)
selects a programme or a menu item.
switches the set on from standby.
3. **POWER/STANDBY INDICATOR**
illuminates brightly when the set is in standby mode.
dims when the set is switched on.
4. **MUTE**
displays information which is input to the set with three different brightness.
5. **MENU**
selects a menu.
6. **OK**
accepts your selection or displays the current mode.
7. **TV/AV**
selects TV or AV mode.
clears the menu / text from the screen.
switches the set on from standby.
8. **REMOTE CONTROL SENSOR**
9. **EYE (option)**
adjusts picture according to the surrounding conditions.
10. **AUDIO/VIDEO IN SOCKETS (AV3)**
Connect the audio/video out sockets of external equipment to these sockets.
S-VIDEO/AUDIO IN SOCKETS (S-AV)
Connect the video out socket of an S-VIDEO VCR to the **S-VIDEO** socket.
Connect the audio out sockets of the S-VIDEO VCR to the audio sockets as in **AV3**.
11. **CENTRE SPEAKER (PT-48/53A83 series only)**
LEFT/RIGHT LOUD-SPEAKERS
Only in PT-48/53A83 series model, the left/right loud-speakers are detachable and need to be connected to the **SPEAKER OUT** sockets on the back panel of the set as indicated by red (+) and black (-) knobs.
Note : Before placing the speakers, screw the speaker legs to the holes on them.
- * **CASTERS (on the bottom)**
turn and move the set easily.

ADJUSTMENT INSTRUCTIONS

Caution :

1. Because this is not a hot chassis, it is not necessary to use an isolation transformer.
However, the use of isolation transformer will help protect test instrument.
2. Adjustment must be done in the correct order.
3. The receiver must be operated for about 60 minutes prior to the adjustment.
Pre-heattrun must be operated receiving moving pictures or 100% white pattern.

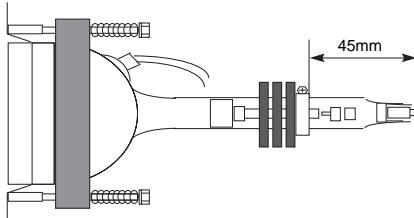


● Raster Slant/Focus Adjustment

1. Preliminary steps

- 1) The lens focus and electrical focus must be provisional alignment.
- 2) Tune the TV set to receive a EU 05 CH.
- 3) Press the buttons of Remote Controller for adjustment (SVC——5—OK—) to reset the convergence.

2. Adjustment

- 1) Set only green to be appeared on the screen.
- 2) Carefully rotate the DY of the green CRT so that the slant of raster become the following figure.

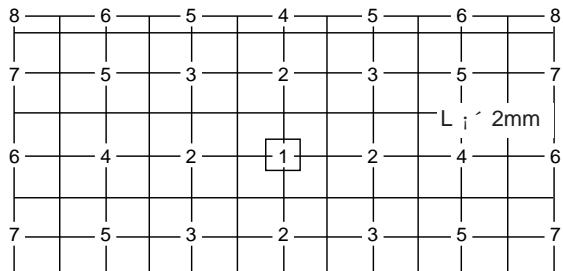

- 3) Set two color (R or B and G) to be appeared on the screen.
- 4) Set the slant of Red or Blue correspond to the green.

Note)

1. Tighten the tightening iron after loose completely. tighten iron which fixing DY when adjusting raster slant and set position.
2. Never control to the tightening iron which fixed, it's condition is not untied.

● Beam Alignment Adjustment

1. Test Equipment

Signal Generator can produce DOT pattern

2. Preliminary steps


- 1) Heat run over 60 minutes.
- 2) Pre-adjust Raster slope, Raster position & Lens focus.
- 3) Check if the Magnet is located 45mm from the end of CRT.
- 4) Receive DOT pattern.

3. 2-Pole Magnet Adjustment

- 1) Make Green raster using lens cover.
- 2) Check the center position of DOT pattern on the center of the screen after turning Green focus volume left.
- 3) Turning green focus volume right and adjust 2-Pole magnet so the position to coincide that of item 2).
- 4) Adjust not to shift the screen by turning green focus volume left & right.
- 5) If the screen shifts, readjust 2)~4).
- 6) Do the same method in Red and Blue. Here, be careful not to be stained.

4. Beam Shape (4 & 6-Pole Magnet) Adjustment

- 1) Do after 2-Pole magnet adjustment.
- 2) Make Green raster using lens cover and turn the focus volume right.
- 3) Make the dot in the center a perfect circle using 4 & 6-Pole magnet.
- 4) Do the same method in Red & Blue.
- 5) Fasten the Magnet after adjustment.
- 6) Adjust focus accurately.

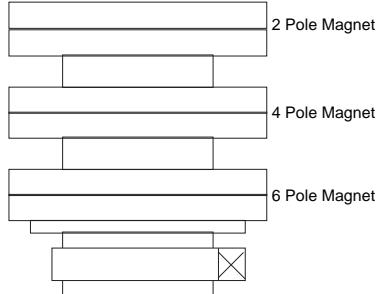

● Centering Magnet Adjustment

1. Preliminary steps

- 1) Tune the TV set to receive a EU 05 CH.
- 2) Press the buttons of Remote Controller for adjustment (SVC——5; OK—) to reset the convergence.

2. Adjustment

1) LG Convergence assy

Make green raster using lens cover and coincide horizontal/vertical center lines of pattern with those of screen.

2) SGS-THOMSON Convergence assy

Adjust until the center of blue signal is shifted upto 30mm left from that of green signal and center of red signal is shifted upto 30mm right from that of green signal with turning the centring magnet.

- 3) After adjusting, recover original convergence data.

● High Voltage Regulation Adjustment

1. Test Equipment

Digital Multi-Meter(DMM)

2. Preliminary steps

- 1) Switch picture mode to STANDARD in no signal input.

3. Adjustment

- 1) Connect "+" terminal(Red) of DMM to the Anode of D432 and "-" terminal(Black) to the Heat Sink of Q406.
- 2) Adjust VR401 so that the D432 terminal voltage is $21.3 \pm 0.1V$.

● CUT-OFF Adjustment

- 1) Press the "SVC" button and then press the "≡" button on the remote controller for adjustment to display horizontal line.(Even though you enter into the SVC mode, the horizontal line might not be seen according to the position of Screen Volume.)
- 2) Adjust Screen Volume (R/G/B) in Focus Pack until brightness of red/blue/green horizontal line is about not to be seen.(At this moment, brightness of red, blue or green horizontal line should be equal to one another.)
- 3) Exit the adjustment mode by pressing the "≡" button.


● Deflection Adjustment

1. Preliminary steps

- 1) Adjust differently based on input signal such as NTSC or PAL.
- 2) NTSC adjustment should be done in STANDARD mode of picture after receiving 13CH signal, and PAL adjustment should be done in STANDARD mode of picture after receiving EU05 CH.
- 3) Reset the data in convergence adjustment mode, quit the mode.
Convergence Mode : SVC, 
Data reset : 5 , OK
Adjustment mode out : 

2. PAL Mode Deflection Adjustment

- 1) At SVC mode, press the YELLOW key get into the deflection adjustment mode.
- 2) VS (Vertical Shift)
Adjust until geometric vertical center line of the screen is accord with the vertical center line of the screen JIG at EU 05 CH by pressing the VOLUME \blacktriangleleft , \triangleright button.
- 3) VA (Vertical Amplitude)
Adjust until fifth vertical line from upper and lower center of the screen is accord with the edge of the frame.

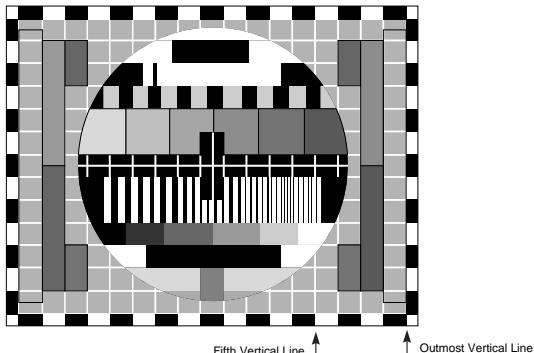

4) HS (Horizontal Shift)

Adjust so that the horizontal center line of a digital circle pattern is in accord with geometric horizontal center of the CPT.

5) EW (East-west Width)

Adjust until the outermost left and right vertical line of the screen is accord with the edge of the frame.

6) EP (East-west Parabolar)

Adjust so that middle portion of the outermost left and right vertical line looks like parallel with vertical lines of the CPT.

7) ET(East-west Trapezium)

Adjust to make the length of top horizontal line same with it of the bottom horizontal line.

8) A-ANG(AFC Angle)

9) A-BOW(AFC BOW)

10) U-C(Upper Cotner Pincushion)

11) L-C(Lower Cotner Pincushion)

12) U-VL(Upper Vertical Linearity)

13) L-VL(Lower Vertical Linearity)

14) VL (Vertical Linearity)

Adjust so that the boundary line between upper and lower half is in accord with geometric horizontal center of the CPT.

15) SC (Vertical "S" Correction)

Adjust so that all distance between each horizontal lines are to be the same.

16) V-ASP(Vertical Aspect Ratio)


Adjust the vertical aspect ratio.

17) Store the adjusted data in EEPROM by pressing the "OK" button before exiting adjustment mode.

18) Restore the convergence correction data by pressing the "TV/AV" button before exiting adjustment mode

3. NTSC Mode Deflection Adjustment

- 1) Adjust vertical size (VA Adjustment) until fourth vertical bar from upper and lower center screen is accord with the edge of the frame.
- 2) Adjust horizontal size (EW Adjustment) until third bar to indicate horizontal size of circle is accord with the edge of the frame.
- 3) Do other adjustments the same as in PAL mode.

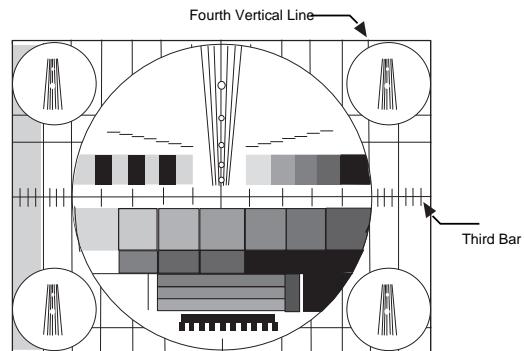


● Lens Focus & Electronic Focus Adjustment

1. Preliminary steps


- 1) Electronic focus,Raster slope & Raster position must be pre-adjusted.
- 2) Heat-run over 60 minutes.
- 3) Receive Crosshatch pattern.
- 4) Adjustment must be operated in a dark room(simple dark room) and pay attention not to touch the lens during adjustment.
- 5) Screen the optional two lens with a cover so that the single color is appeared on the screen.
- 6) When turn the light the lens at front, chromatic aberration which appeared in bright line of cross-Hatch signal changed as below.

Lens	Change of chromatic aberration
Red	Orange \rightarrow Scarlet
Green	Blue \rightarrow Red
Blue	Purple \rightarrow Green



2. G-lens Adjustment


- 1) Turn the lens until the chromatic aberration changed Blue to Red point.
- 2) Viewing the all screen, in no case of the chromatic aberration appeared slimly within 3.5 cross-Hatch of the picture center. At this time, in case that the red chromatic aberration's bright line isn't equal, adjust G-lens so that the red chromatic aberration is appeared more than previous time.



- 3) Switching the signal to 13CH and operate adjustment minutely.
- 4) Adjust G-focus control volume of focus pack so that the external big circle's part appeared clearly.
- 5) Adjust accurately by repeat the upper control.
- 6) Especially, noting to the G-light because it influenced on picture's function.

3. R-lens Adjustment

- 1) Turn the lens until the chromatic aberration changed orange to scarlet.
- 2) Adjust the chromatic aberration so that it located center correctly.
- 3) Switching the signal to 13CH and adjust it as same method of G-lens.




- 4) Adjust as same method of G-lens with Red focus control volume of focus pack.

4. B- lens Adjustment

- 1) Turn the lens until the chromatic aberration changed purple

to green which of 3.5 Cross-Hatch part from picture's center toward left.



- 2) Adjust the chromatic aberration become center of purple and green.

Note) After adjustment Red,Green & Blue lens, remove lens cover and receive Cross-Hatch pattern and check the overall focus. If need, repeat above.

● Convergence Adjustment

1. Preliminary steps

- 1) This adjustment should be performed after raster slant, raster position, horizontal and vertical adjustment.
- 2) This adjustment should be performed after warming up 60 minutes.
- 3) Do it always with crosshatch pattern.
- 4) Adjust for both PAL and NTSC system.
- 5) Use the jig screen with the cross hatch pattern for each mode.

2. Convergence Key

- 1) Convergence Mode : SVC,
- 2) Cursor shift : , , ,
- 3) Cursor Movement/Adjustment Selection : OK
- 4) Cursor Color Selection : TV/AV
- 5) Adjustment mode out :

Note) When cursor flickers, its adjustment mode, and when quiescent, its cursor movement mode.


● Mode Adjustment

1. Preliminary steps

Press the buttons SVC & of Remote Controller for adjustment to get into the convergence adjustment mode.

2. Horizontal/Vertical phase Adjustment

- 1) Press the buttons 9 & 5 to get into the phase adjustment mode.
- 2) Horizontal Phase Adjustment.
Press the volume / button and move the convex part to the middle of TV screen.

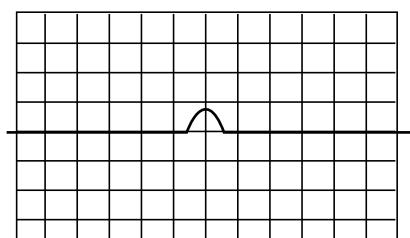

- 3) Vertical Phase Adjustment

Press the channel / button and move the convex part to the middle of TV screen.

- 4) Press the OK button to escape from the adjustment.


3. Pattern Position Adjustment

- 1) Change into pattern shift mode.
(Press numeric buttons "9" & "4")
- 2) Make sure to overlap pattern and image.
(Use MUTE button)
- 3) Accord the center of image and pattern.
(Use \blacktriangleleft , \triangleright , \blacktriangleup , \blacktriangledown buttons)
- 4) Quit pattern shift mode. (Press "OK" button)
- 5) Save adjusted phase/pattern position adjustment mode.(Press "9", "2" & "OK" buttons)

4. Green Convergence Adjustment

- 1) Show the OSD on screen by pressing 2 button,then change the OSD to green(G) adjustment mode with pressing TV/AV button.
- 2) Close the cover of red CRT and blue CRT so that green display on screen only.
- 3) Adjust to coincide green pattern with screen jig pattern.
(Use \blacktriangleleft , \triangleright , \blacktriangleup , \blacktriangledown buttons)

Move cursor and adjust convergence in same way with item 3).
Here, do it in the same order from center listed in figure.

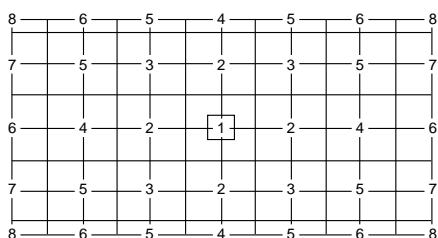

5. Red Convergence adjustment

- 1) Show the OSD on screen by pressing 2 button,then change the OSD to red(R) adjustment mode with pressing TV/AV button.
- 2) If the need arises,close the cover of the blue lens.
- 3) Coincide the red screen with the green screen in same way with that of green convergence adjustment.

6. Blue Convergence adjustment

- 1) Show the OSD on screen by pressing 2 button,then change the OSD to blue(B) adjustment mode with pressing TV/AV button.
- 2) Coincide the blue screen with the green screen in same way with that of red convergence adjustment.

7. Adjusted Data saving

- 1) Save the data after adjustment.
(Press "9", "1" & "OK" button)
- 2) Quit convergence adjustment mode. (" $\equiv M$ " button)

● White Balance Adjustment

1. Test Equipment

Brightness meter(CA110),Pattern Generator(Window Pattern)


2. Adjustment

- 1) This adjustment must be operated in a dark room or equivalent.
- 2) Adjust after Cut-Off and Focus adjustment.
- 3) The brightness meter must be located in 20 \pm 5cm distance from the center of the screen.
- 4) Receive WINDOW signal.
- 5) Set BRIGHT to H/Light adjustment mode in 4) and enter SVC mode by pressing the "SVC" button. Adjust RG (R Gain) and BG (B Gain) until color coordinate becomes

X=0.280 and Y=0.300 (Deviation : ± 0.01).

- 6) Set BRIGHT to L/Light adjustment mode and adjust CR (R Cut Off) and CB (B Cut Off) until color coordinate becomes X=0.282 and Y=0.286 (Deviation : ± 0.01).
- 7) Repeat adjusting until the color coordinate of H/Light and L/Light is satisfied.
- 8) Save the data after adjustment.
(Press "OK" button)
- 9) Quit adjustment mode. (" TV/AV " button)

● SUB-BRIGHT Adjustment

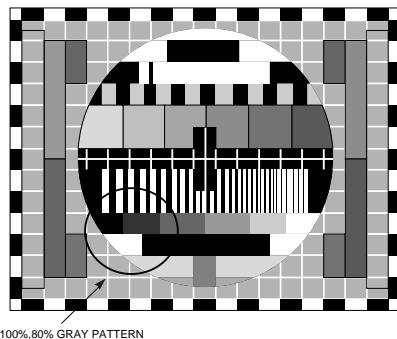


- 1) Tune the TV set to receive a EU 05 CH.
- 2) Enter SVC mode by pressing the "SVC" button. Adjust S-BRI data until 100% and 80% GRAY PATTERN is classified.
(Use \blacktriangleleft , \triangleright , \blacktriangleup , \blacktriangledown , ENTER buttons)

● DVCO Adjustment

- 1) Tune the TV set to receive a EU 05 CH.
- 2) Enter the adjustment mode by pressing SVC button of Remote Controller for adjustment,then select DVCO menu. Operate auto adjustment with VOL \blacktriangleright button.
If DVCO data is changed,auto adjustment has finished.
- 3) After finishing DVCO adjustment,save the data by pressing OK button.

● PIP POSITION Adjustment

- 1) After receiving a PAL signal,show the multi-picture scan screen on screen with pressing WD2 9/4PIP button.
- 2) Check the left,right blank on SCAN screen.(May be 20 \pm 5mm)

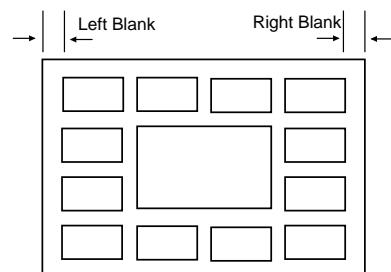

- 3) If the left,right blank isn't 20 \pm 5mm and symmetry,enter the adjustment mode by pressing SVC button of Remote Controller for adjustment and select service adjustment mode 5 by pressing YELLOW button.
- 4) Adjust M-HOR and M-VER to symmetry of left,right blank in service adjustment mode 5.
- 5) When finishing adjustment,save the data by pressing OK button.

● SVC Adjustment mode & Initial data

1. White Balance adjustment data (IC:CXA2100)

Menu	Description	Range	Default
RD	Red Drive		12
GD	Green Drive		1F
BD	Blue Drive		19
RC	Red Cut-off		0C
GC	Green Cut-off		3F
BC	Blue Cut-off		19
S-BRI	Sub BRIGHT		1A
DVCO	Digital VCO		

2. Deflection adjustment data (IC:CXA2100)

Menu	Description	Range	Default	
			PAL	NTSC
VS	Vertical Shift		11	10
VA	Vertical Amp		10	13
HS	Horizontal Shift		1A	2A
EW	East-West Width		1D	1E
EP	East-West Parabola		1E	20
ET	East-West Trapezium		6	6
U-C	UP Corner Pincushion		11	11
L-C	LO Corner Pincushion		11	11
U-VL	UP Vertical Linearity		C	D
L-VL	LO Vertical Linearity		5	7
VL	Vertical Linearity		6	6
A-ANG	AFC Angle		7	7
A-BOW	AFC Bow		7	7
SC	Vertical S-Correction		3	3
V-ASP	Aspect ratio control		1F	1F

3. Picture adjustment data (IC:CXA2100)

Menu	Description	Range	Default
D-COL	Dynamic Color ON/OFF		1
COLAX	Color matrix		2
DCOL	Dynamic Color Temperate		1
LIMLE	RGB Amplitude Limiter Level		1
CTILE	CTI Level		1
GAMMA	GAMMA correction		2
LTILE	LTI Level		1
BLKBO	RGB Bottom Limiter Level		0
ABLTH	ABL threshold		3
ABLMO	ABL Mode		3
VM-LE	VM Level		1
PREOV	Pre/Over-Shoot Control		3
DPIC	Auto Pedestal level		1

Menu	Description	Range	Default
DC-TR	DC transmission control		3
LRGB2	RGB2 output level control		A
DL-PA	DElay Line switching		0
SHPF0	Sharpness f0		1
CB-F1	INput1 CB signal DC Offset		7
CR-F1	INput1 CR signal DC Offset		4
CB-F2	INput2 CB signal DC Offset		7
CR-F2	INput2 CR signal DC Offset		4
VCOMP	A-SAW output gain control		0
EW-DC	EW output DC level		1
AKBT2	AKB time shift		0
HCOMP	EW output DC control		0
VBLKW	VBLK width control		0
LE-BL	Left HBLK width control		37
RI-BL	Right HBLK width control		1B
S-CON	Sub contrast		A
P-ABL	PEAK ABL		C

4. Sound adjustment data (IC:MSP3452)

Menu	Description	Range	Default
FM	FM Prescaler		1B
NP	NICAM Prescaler		73
SP	SCART Prescaler		18
S1 VOL	SCART 1 Volume		50
S2 VOL	SCART 2 Volume		50
MDB-ST	MDB Effect Bass Strength		24
MDB-LIM	MDB Amplitude Limit		FD
MDB-HMC	MDB Harmonic Content		64
MDB-LP	MDB Low Pass		09
MDB-HP	MDB High Pass		06

5. Picture adjustment data (IC:SDA9410)

Menu	Description	Range	Default
VDEM	Vsync input delay(main)		13
NRY	Temporal Noise Reduction of Y		0e
NRC	Temporal Noise Reduction of C		0a
NRKY			00
NRKC			00
ODELM	Output Processing delay master		Aa
VDELS	Vsync input delay(sub)		13
FSEL	Filter Select		3
RF AGC	RF AGC Level		A2
M-HOR	Horizontal PIP Position		7
M-VER	Vertical PIP Position		7

6.OPTION Data Adjustment


	Range	Description	Default
option1	200 PRO	1: 200 Program(CHINA Only) 0: 100 Program	
	TSEAR	1: With TURBO Search 0: Without TURBO Search	
	I/II SV	1: Save Dual Sound Condition 0: Not Save Dual Sound	
	TOP	Condition 1: TOP + FLOF TEXT	
	EYE	0: FLOF TEXT 1: With Digital EYE	
	A2 ST	0: Without Digital EYE 1: With FM Stereo	
	SYS	0: Without FM Stereo 0 : BG/I/DK(PE-) 1 : BG/L(PL-) 2: BG/I/DK/M(PT-) 3 : RESERVED	
	ACMS	1: Wih Channel Name Display (All Countries except Australilia) 0: Without Channel Name Display (Australilia)	
	VOL	1: Rushed Sound Curve (Middle East ASIA,INDIA) 0: Standard Sound Curve (Other countries)	
	AV4	1: With AV4 Input 0: Without AV4 Input	
option2	EU	1: PE/PL Model 0: PT Model	
	DVD i	1: With COMPONENT1 Input 0: Without COMPONENT1 Input	
	DVD p	1: With COMPONENT2 Input 0: Without COMPONENT2 Input	
	VGA	1: With VGA Input 0: With VGA Input	
	C SPK	1: With CENTER SPK 0: Without CENTER SPK	
	VFD	1: Digital Index button 0: SOUND MUTE button	
	C MUTE	1: RF Normal Sound Modulation(Others) 0: High Deviation Modulation(CHINA)	
	DOLBY	1: With DOLBY Pro LOgic 0: Without DOLBY Pro LOgic	
	V-DOL	1: With DOLBY Virtual Surround 0: Without DOLBY Virtual Surrouнд	

	Range	Description	Default
option3	TEXT	1: With Teletext 0: Without Teletext(CHINA)	
	SCART	1: RF 54% Modulation INput 0: RF 100% Modulation INput	
	CH + AU	1: China+AUST.Channel Table 0: Other countries Channel table	

	State	Language	Funciton	Default
option4	LANG	0:E Only	English	
		1:EU 5EA	English/German/French/Italy/Spanish	
		2:EU ETC	Pol./Hungary/Czecho/Russia/Eng	
		3:PARSI	English/Parsi	
		4:ARAB DUAL	English/French/Arab+Urdu	
		5:English+Hindi	English/Hindi	
		6:English+I+M+V	English/Indonesian/Malaysian/Vietnamese	
		7:English+THAI	English/Thai	
		8:English+China	English/China	
		0:West Europe	English/French/Swedish/Czech/German/Spanish/Italian	
T-LAN	T-LAN	1:East Europe	Polish/Fench/Swedish/Czech/German/Slovenian/Italian/Romanian	
		2:Turkey	English/French/Swedish/Turkish/German/Spanish/Italian	
		3:EAST EU2	English/Hungarian/Serbian/Czech/German/Polish/Spanish/Itallian/	
			Romanian	
		4:Cyrillic 1		
		5:Cyrillic 2		
		6:Cyrillic 3		
		7:Turkey/Greek 1		
		8:Turkey/Greek 2		
		9:Turkey/Greek 3		
		10:Arab/France		
		11:Arab/English		
		12:Arab/Hebrew 1		
		13:Arab/Hebrew 2		
		14:Farsi/English		
		15:Farsi/France		
		16:Farsi all		


Trouble Shooting

1. NO PICTURE (SOUND OK)

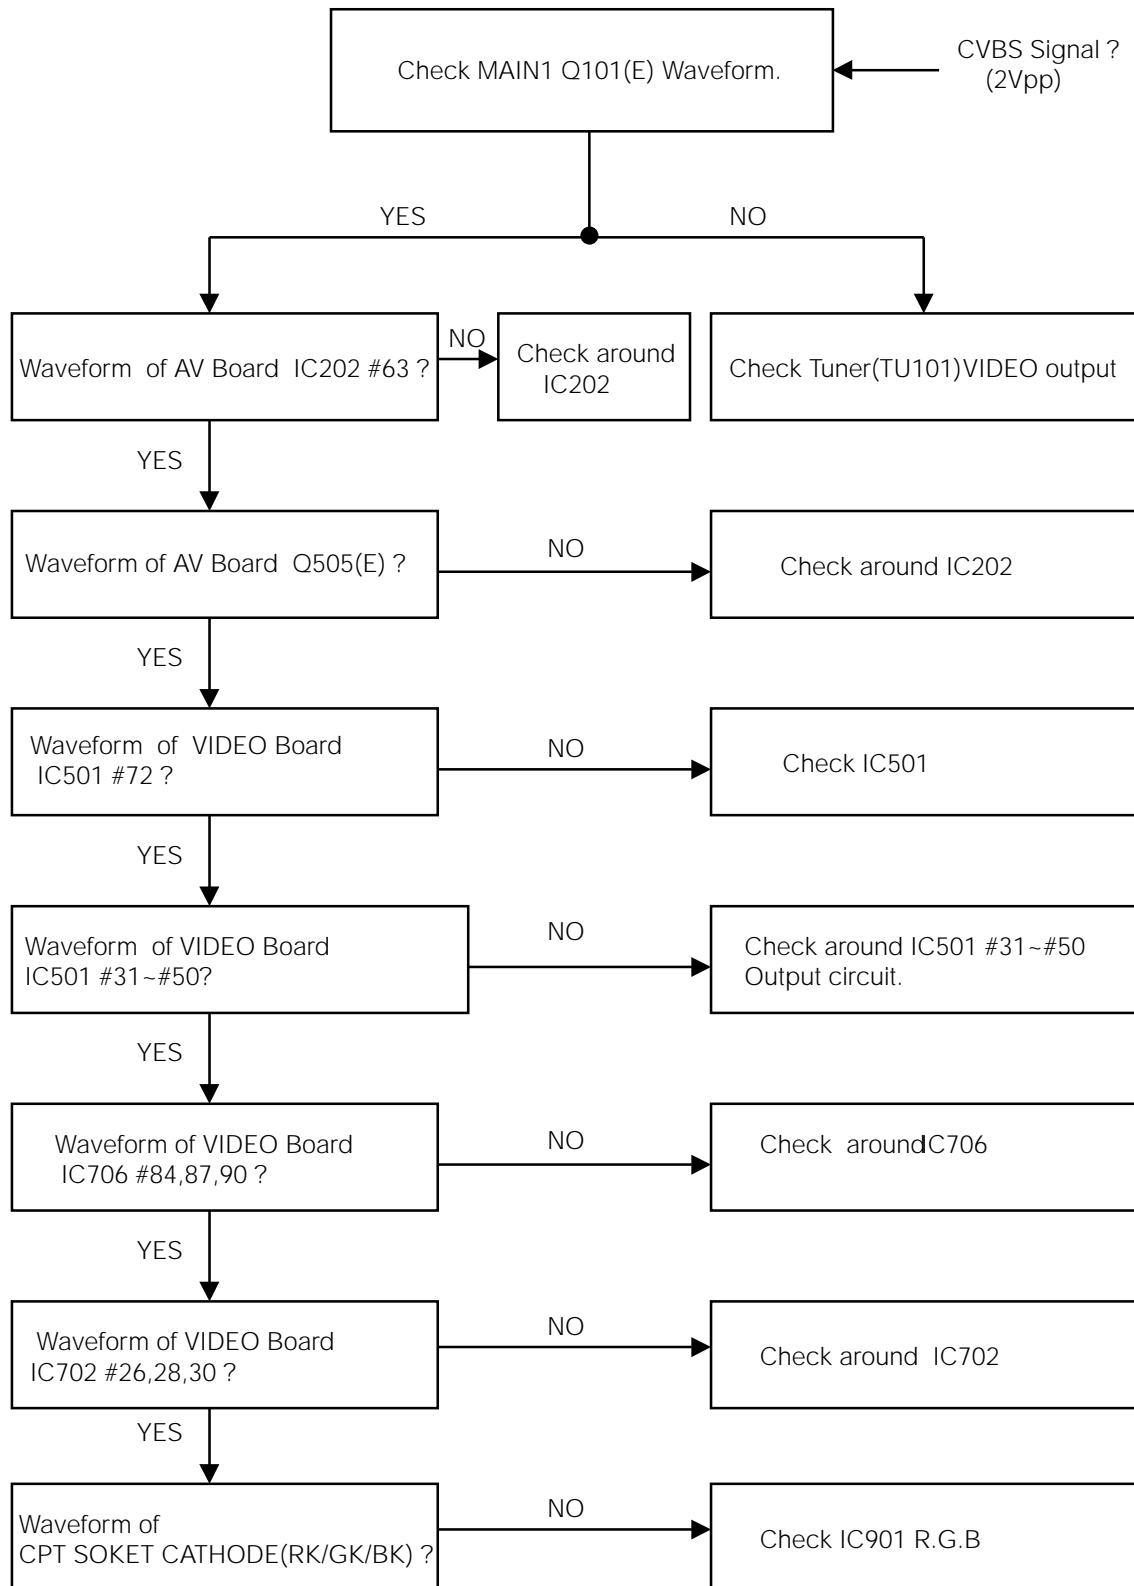


2. NO SOUND(PICTURE OK)


<AV1,2,3,DVD(480i),DVD(480p) INPUT>

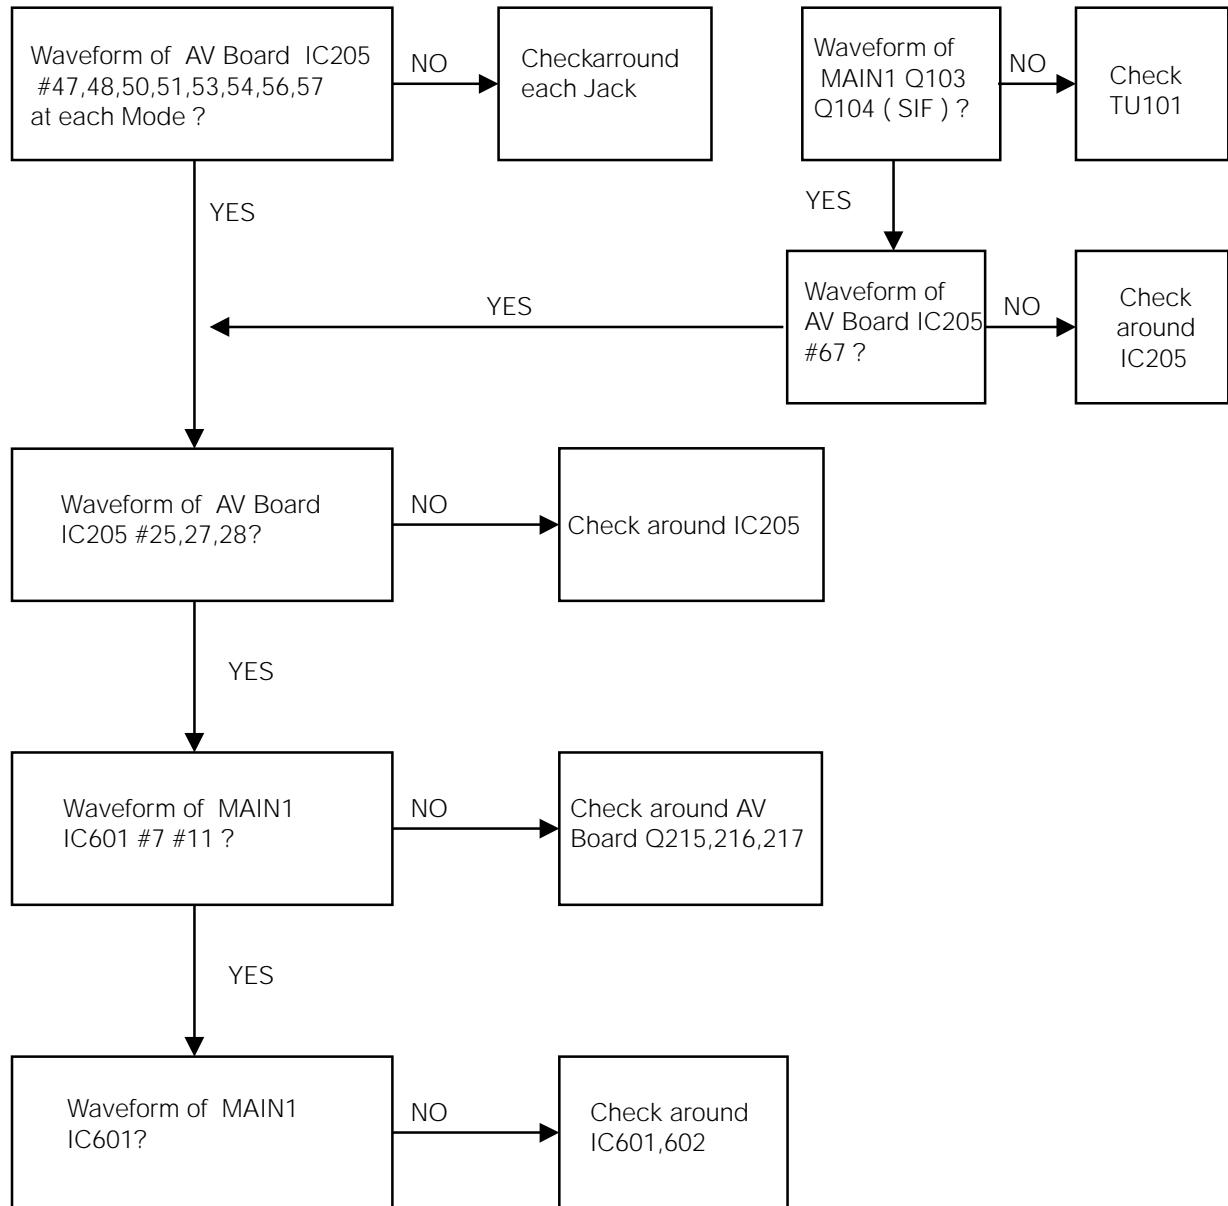


3. NO PIP

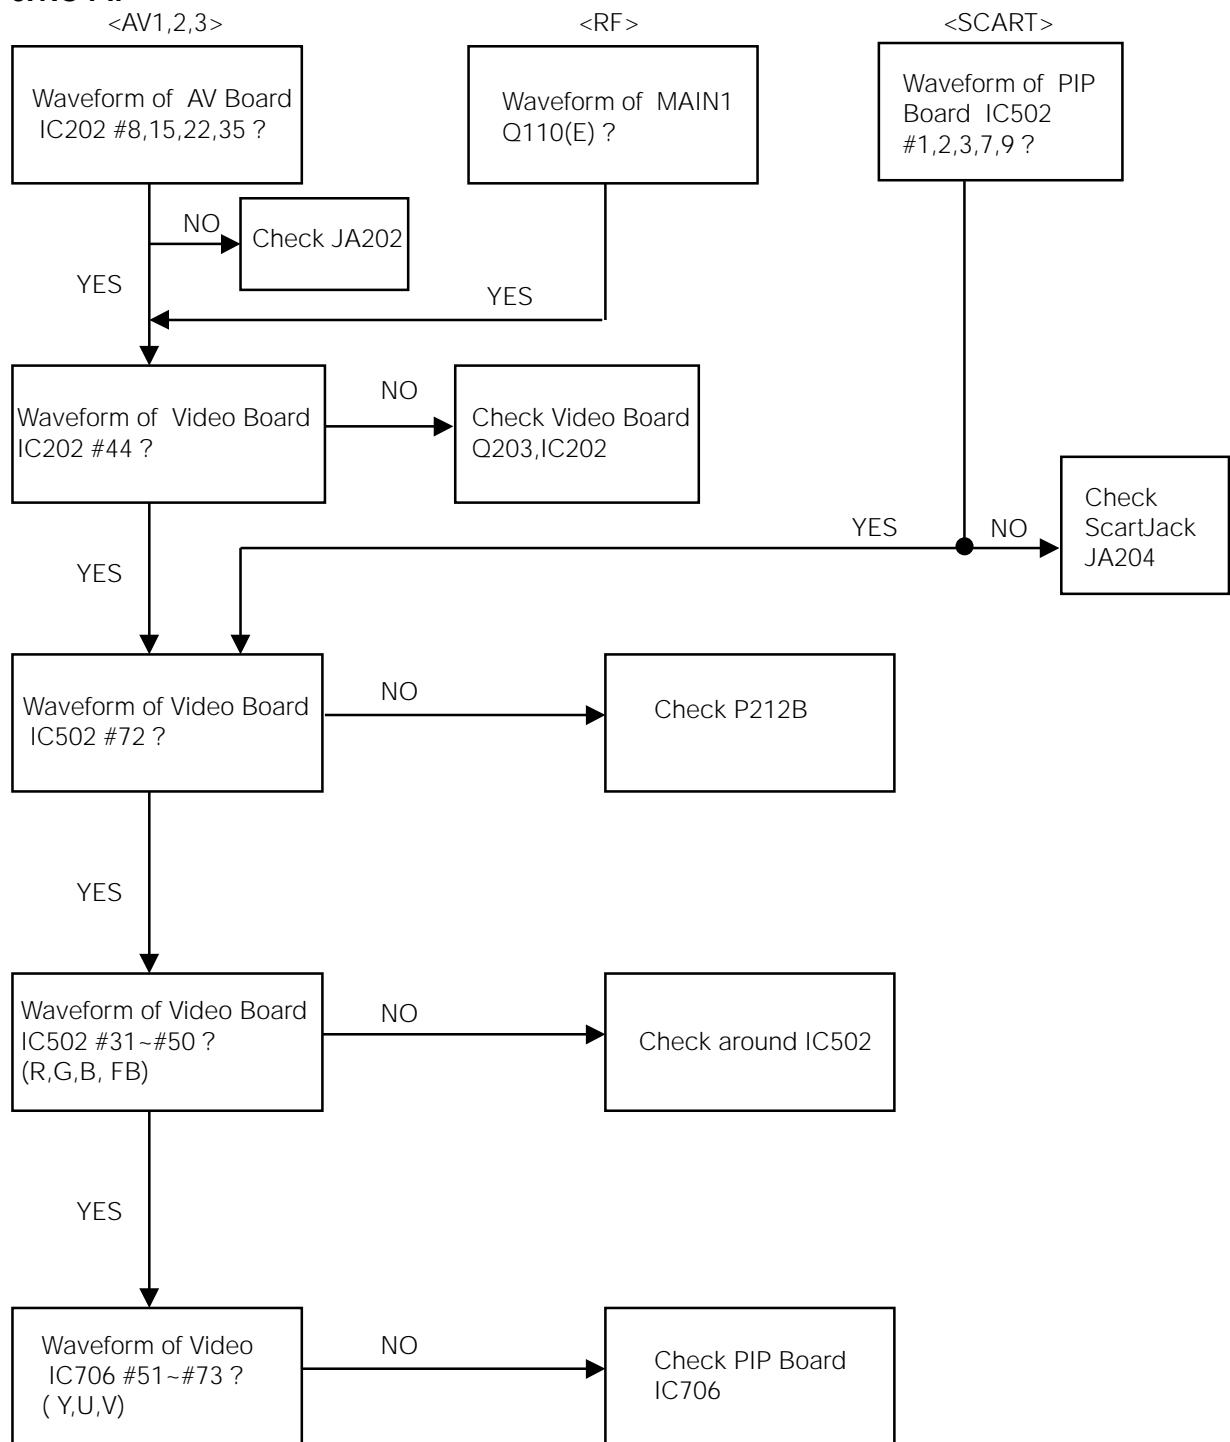


4. NO Teletext (Picture OK)

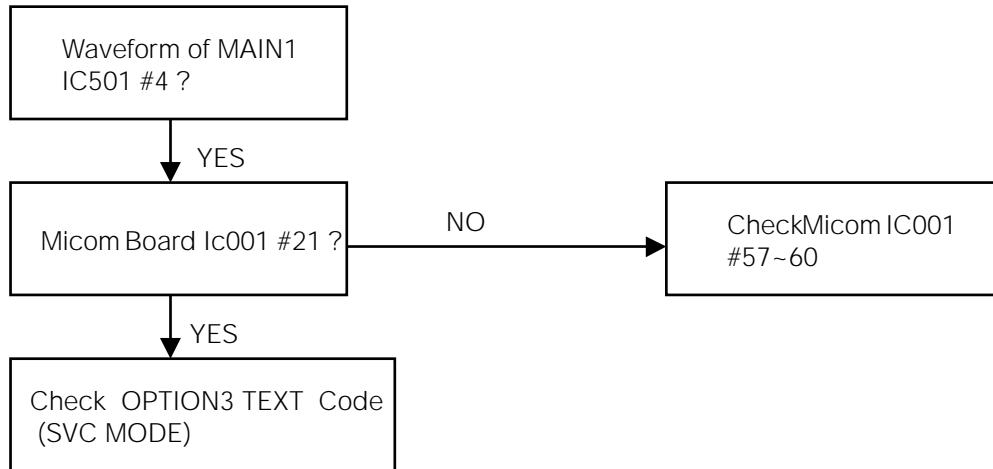


5. NO OSD (ON SCREEN DISPLAY)

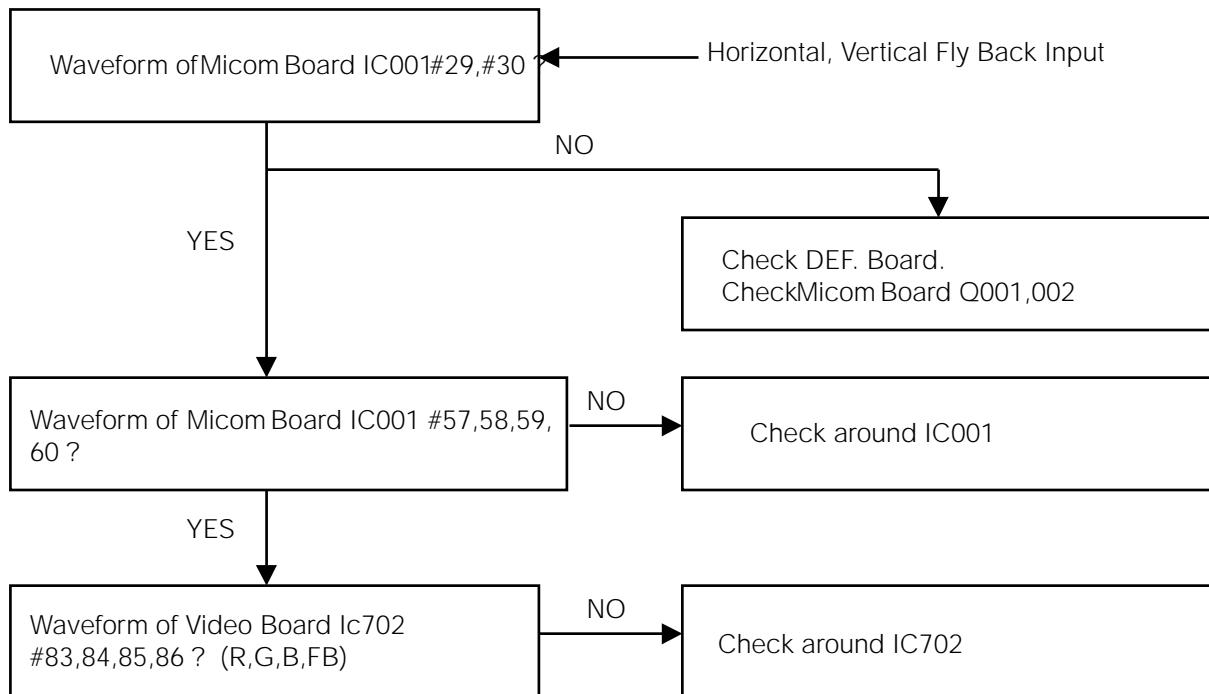


6. NO POWER ON

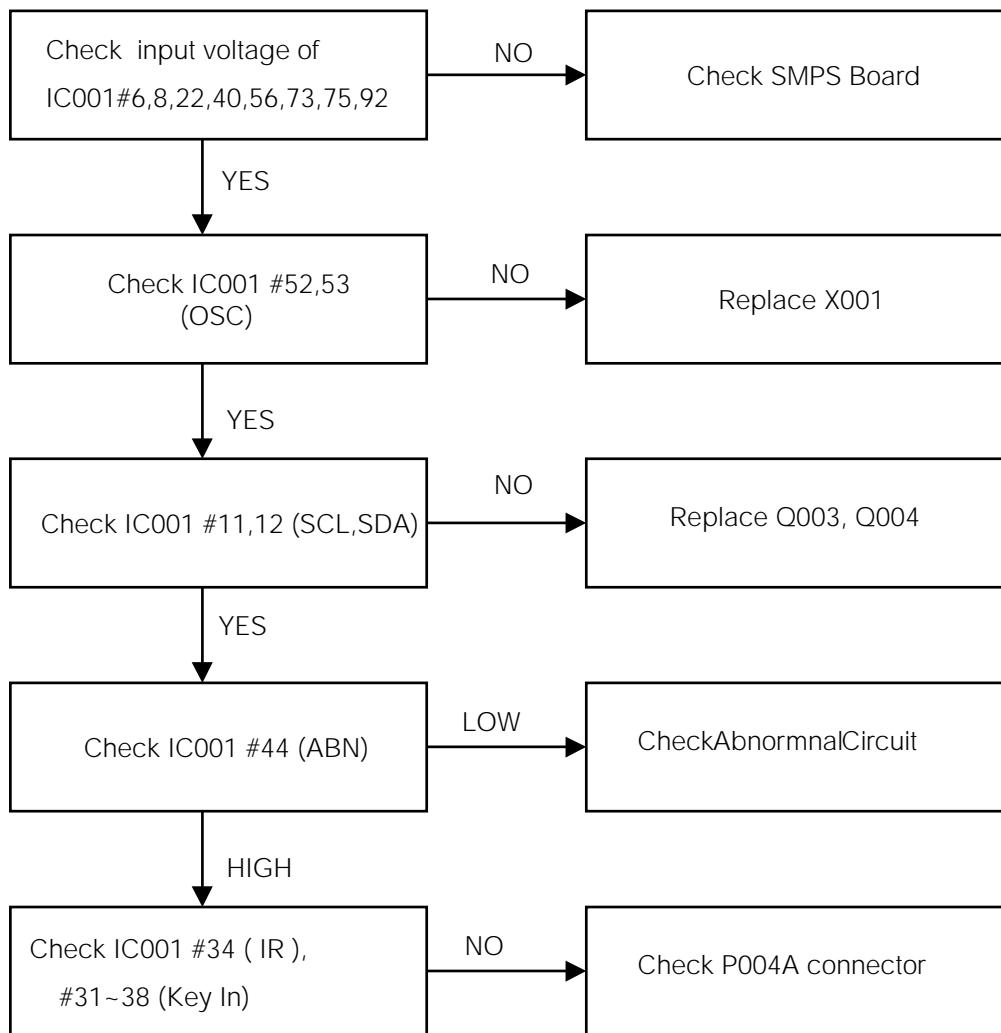


7. NO VFD OPERATION (Option)

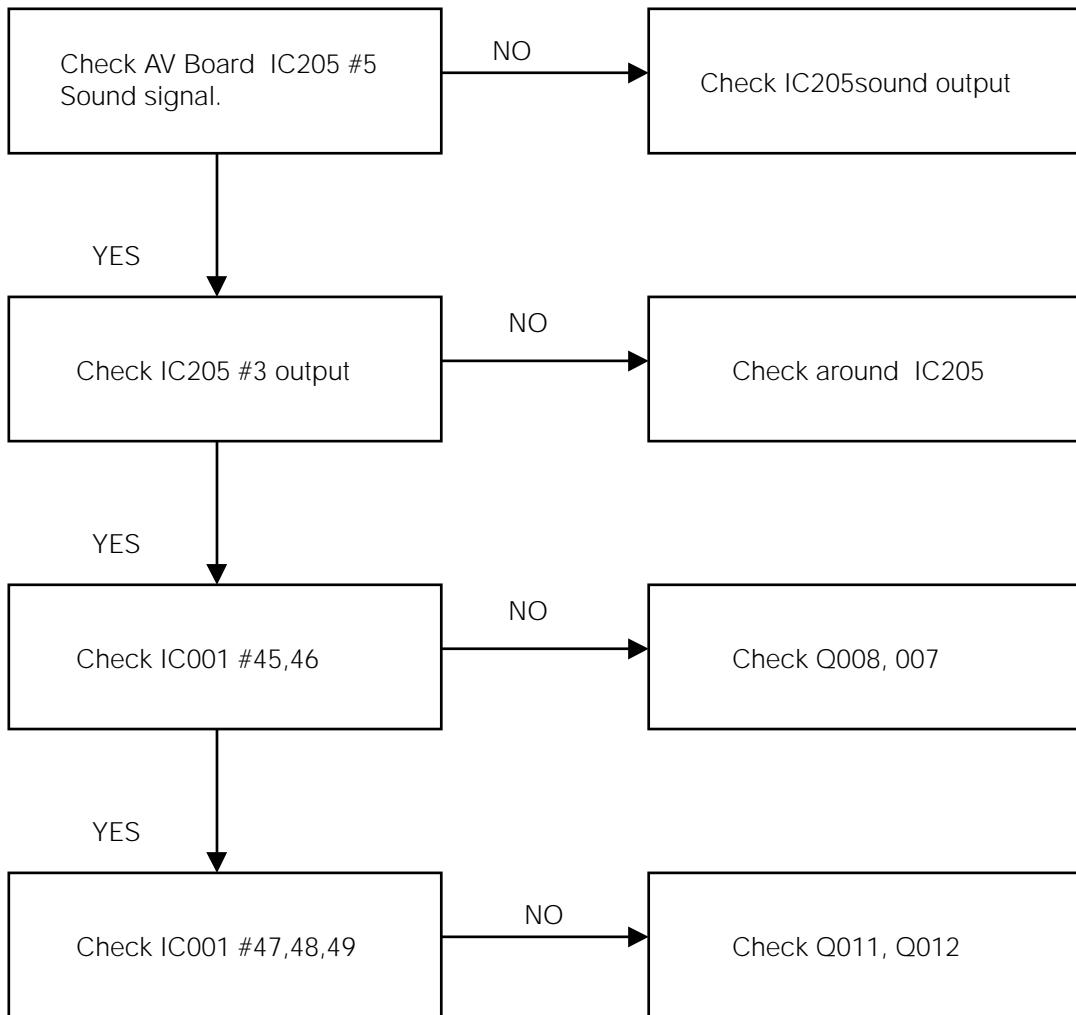


8.NO RASTER

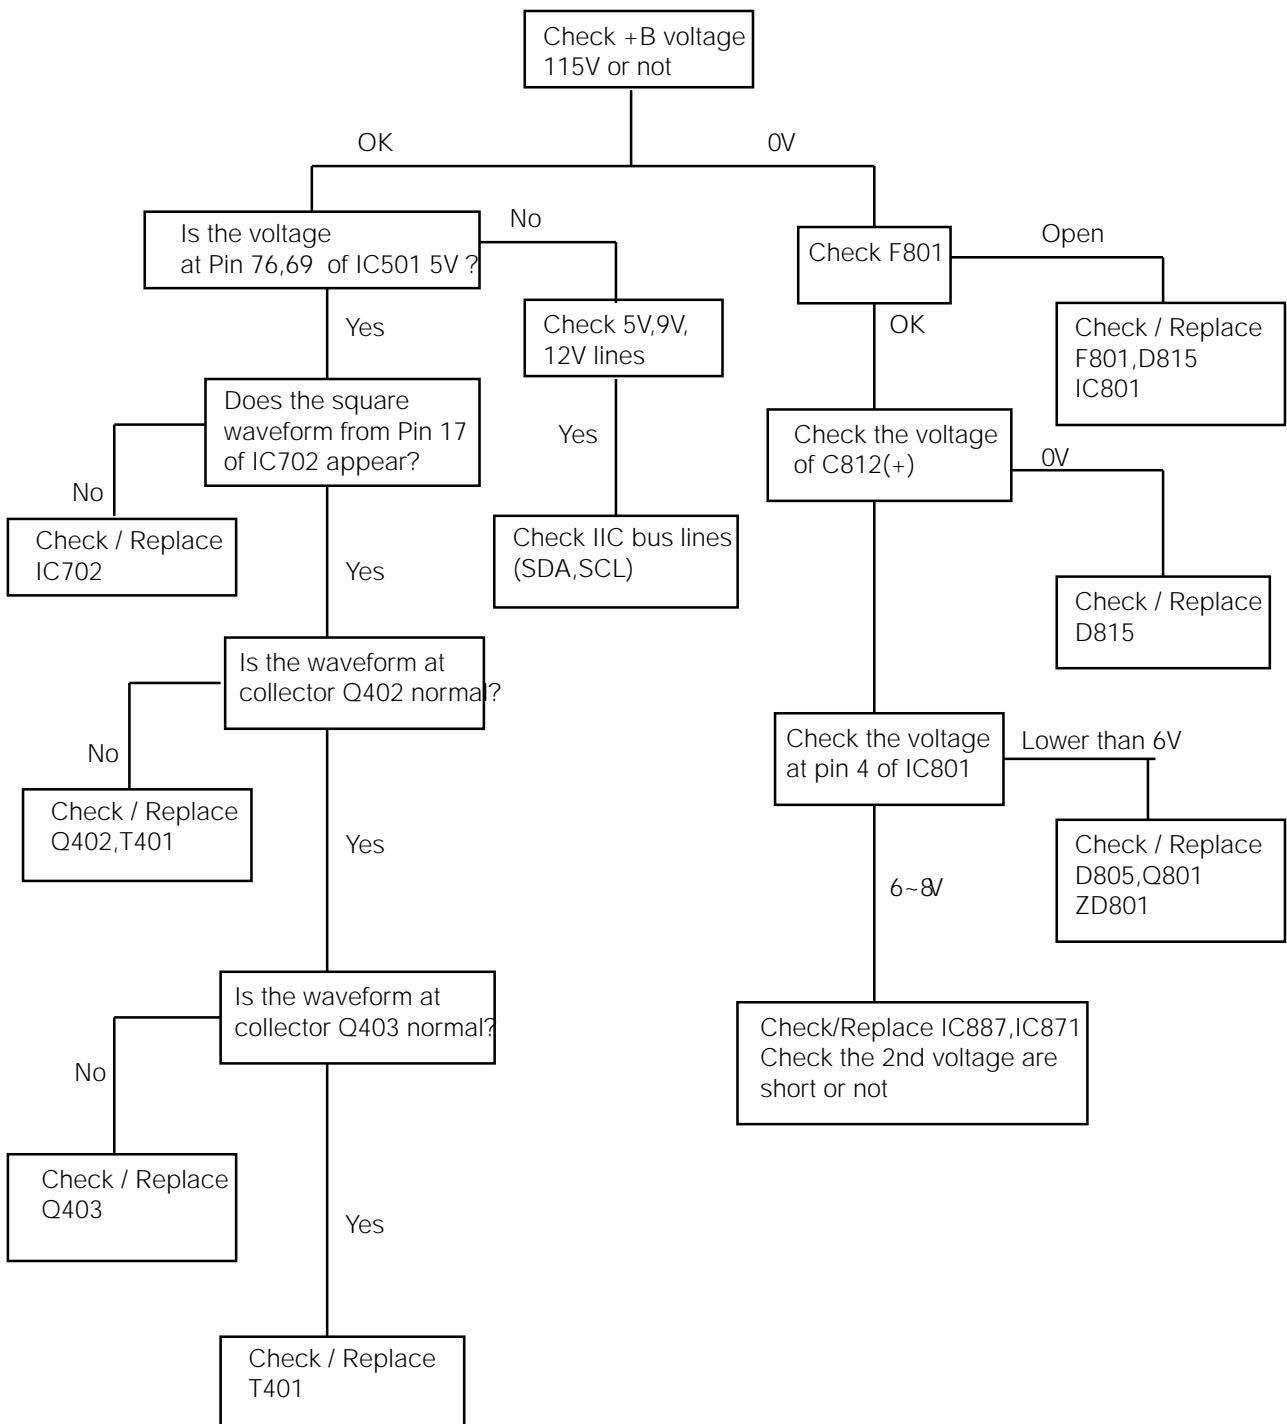


9. INCORRECT CONVERGENCE

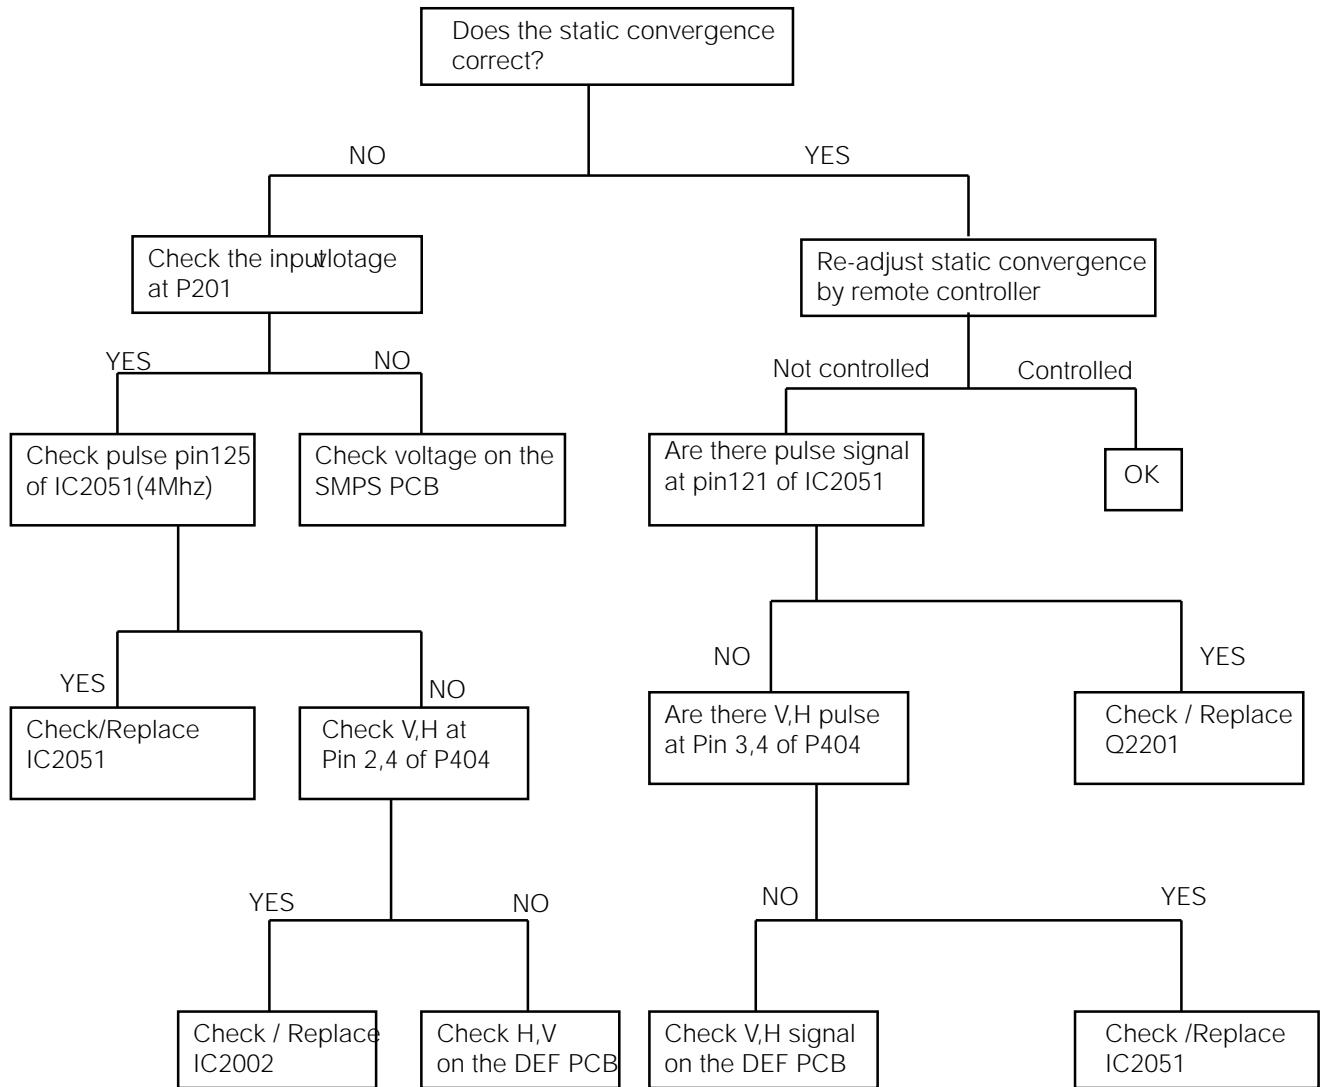


BLOCK DIAGRAM(SIGNAL)

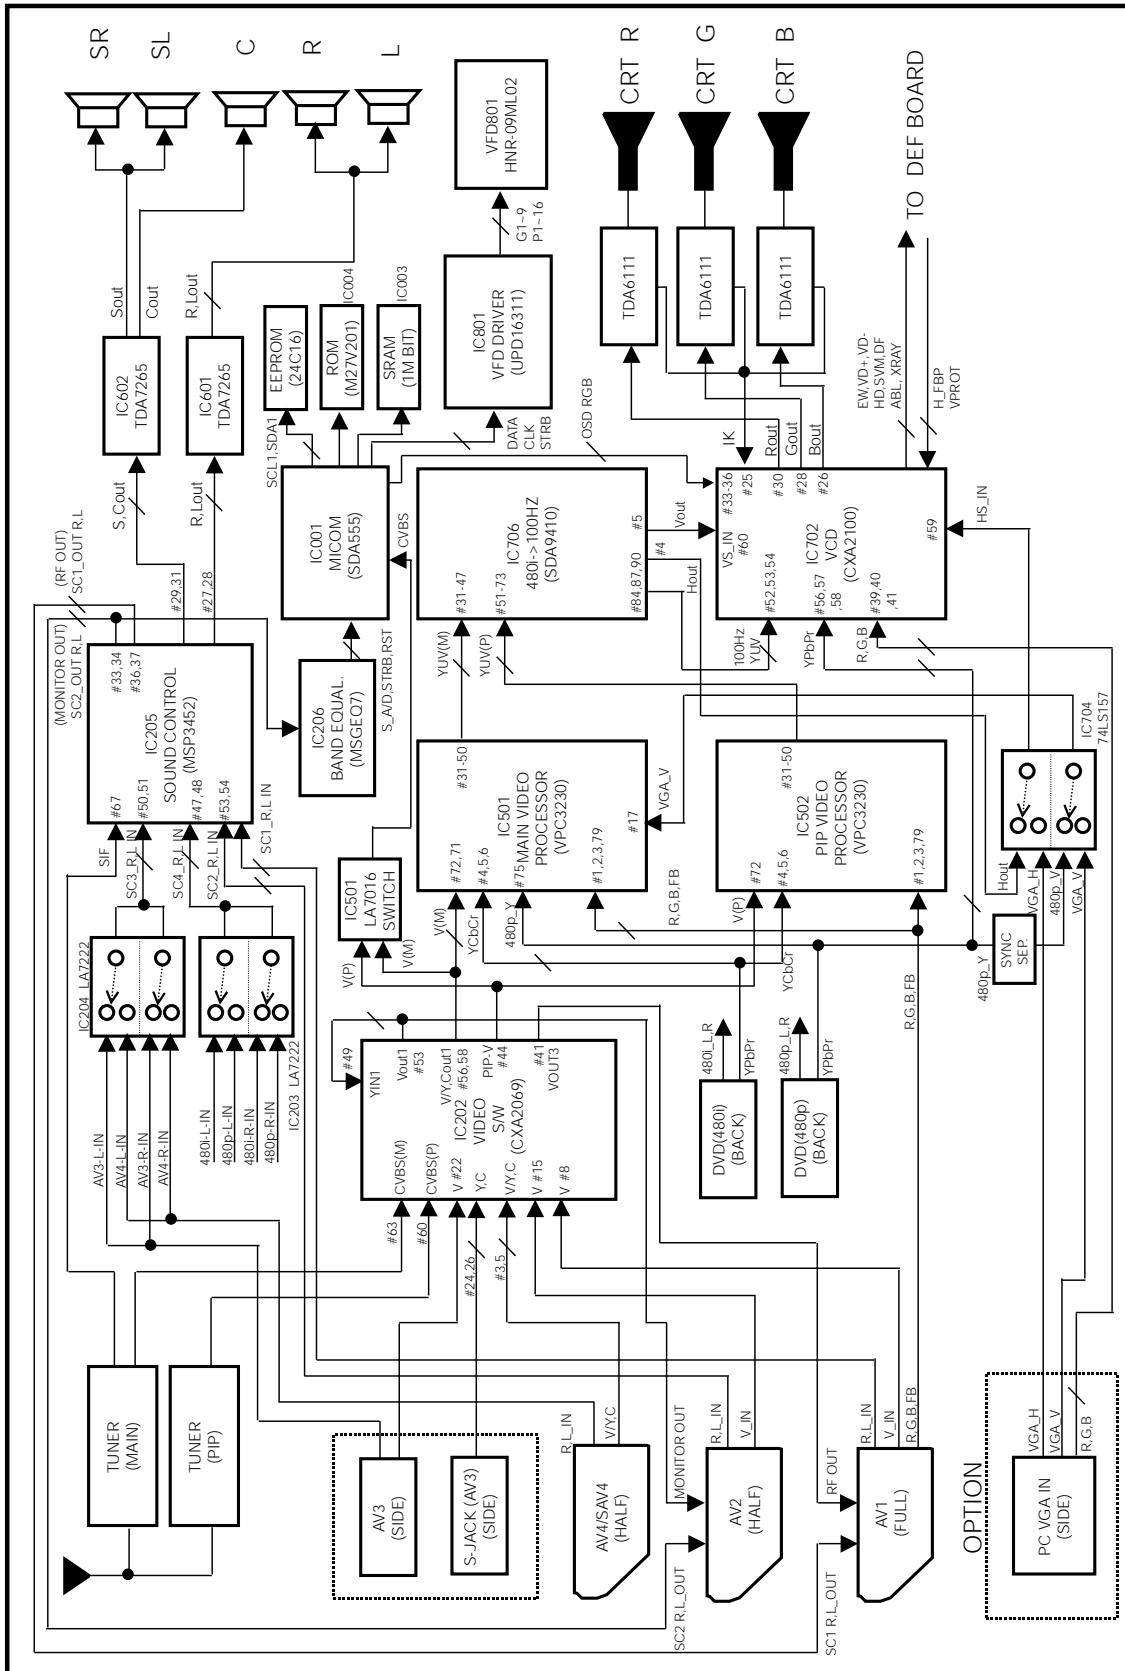


BLOCK DIAGRAM(DEF)

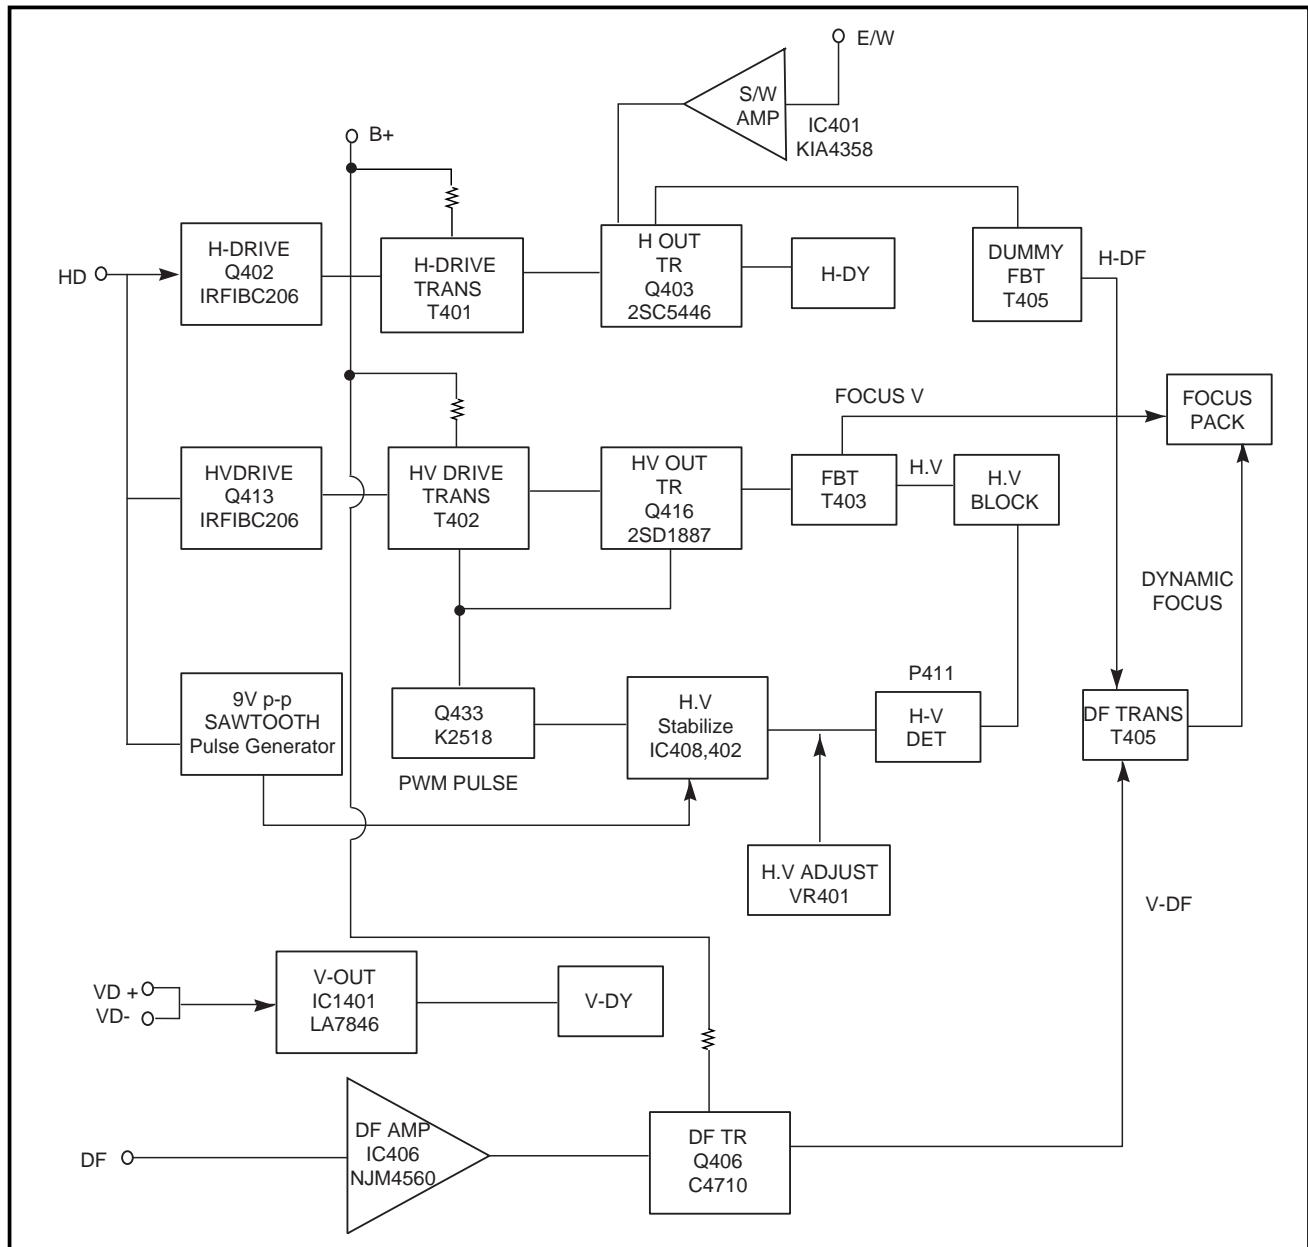

BLOCK DIAGRAM(SMPS-WIDE)

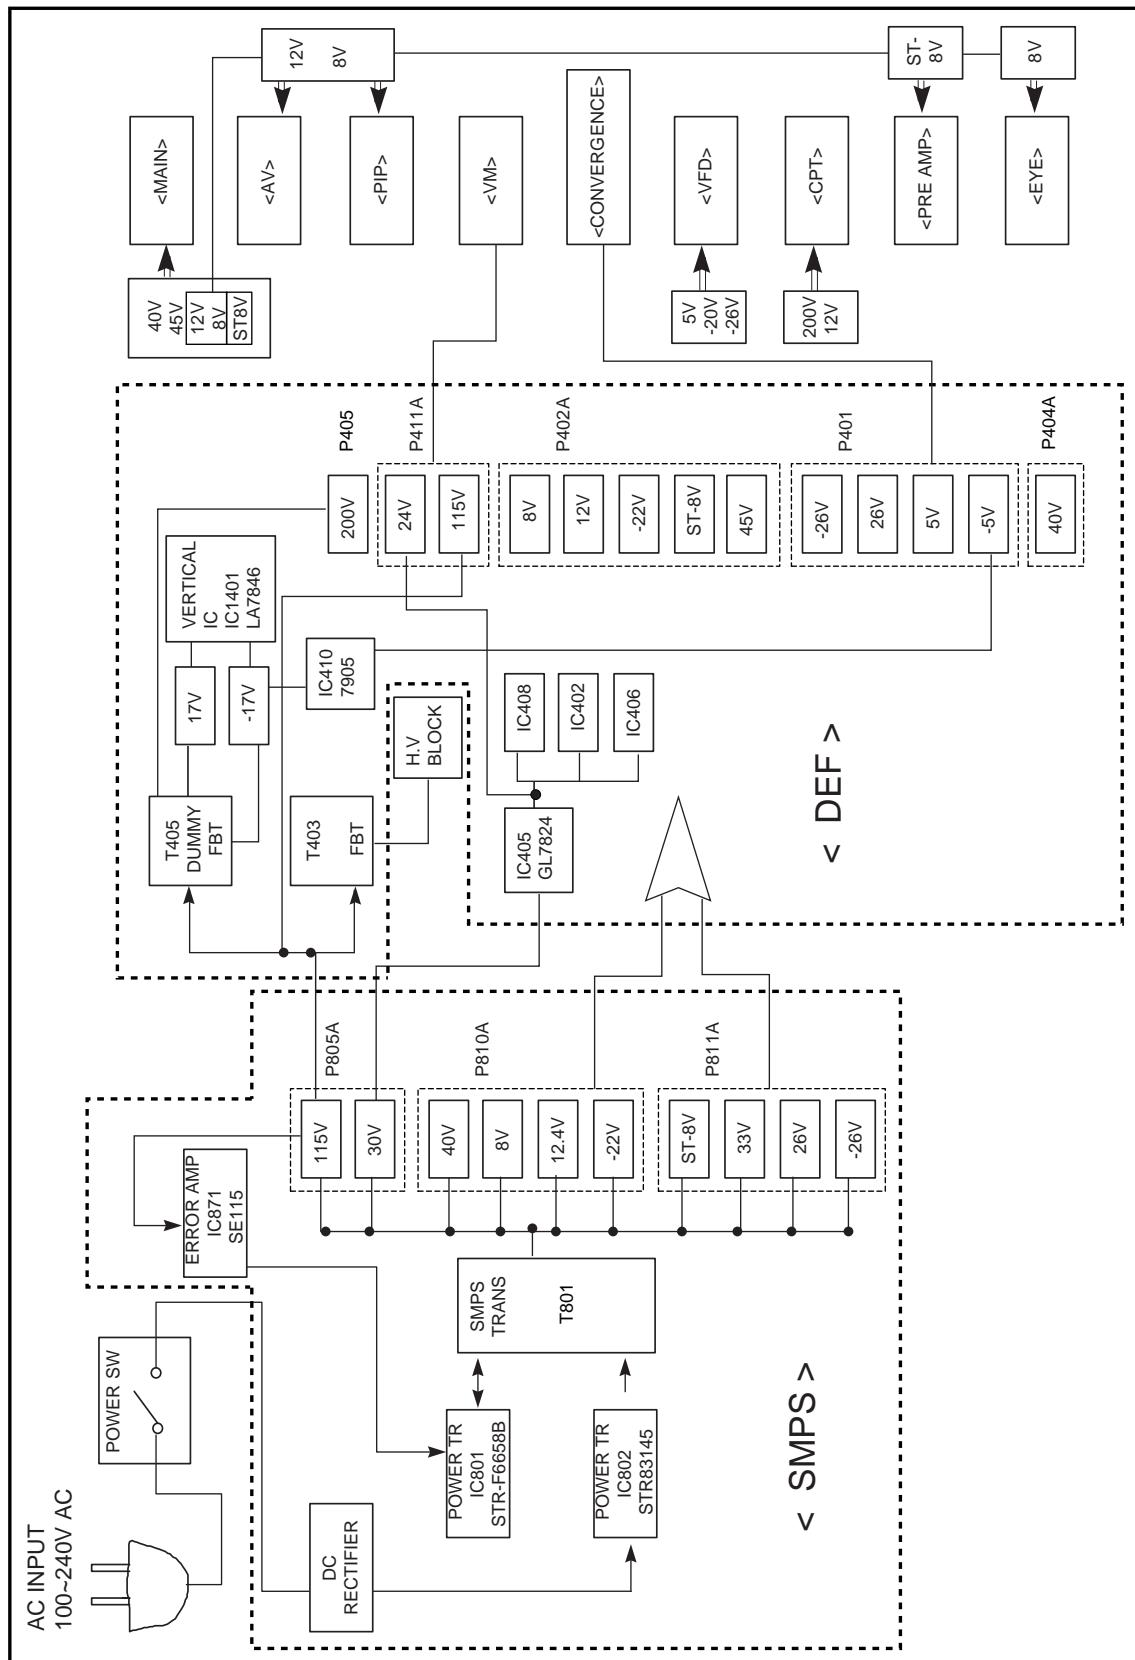


BLOCK DIAGRAM(SMPS-NARROW)

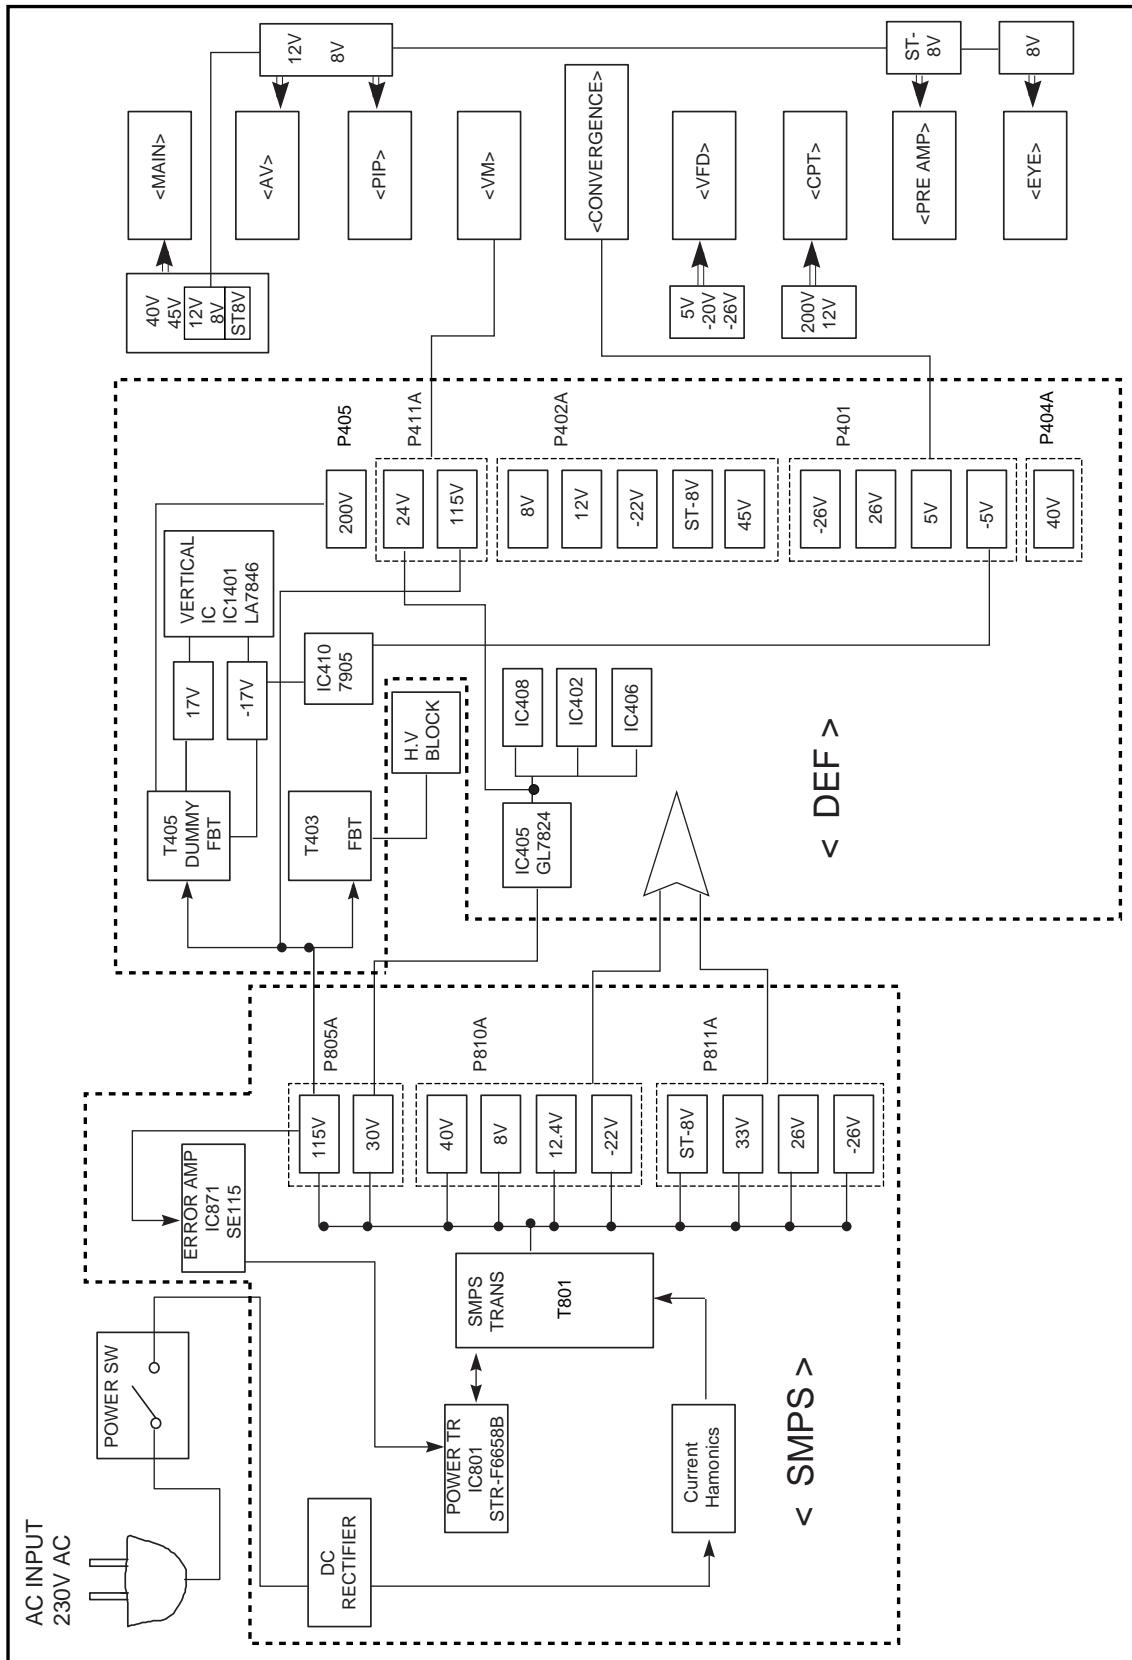

SIGNAL


PRINTED CIRCUIT BOARD

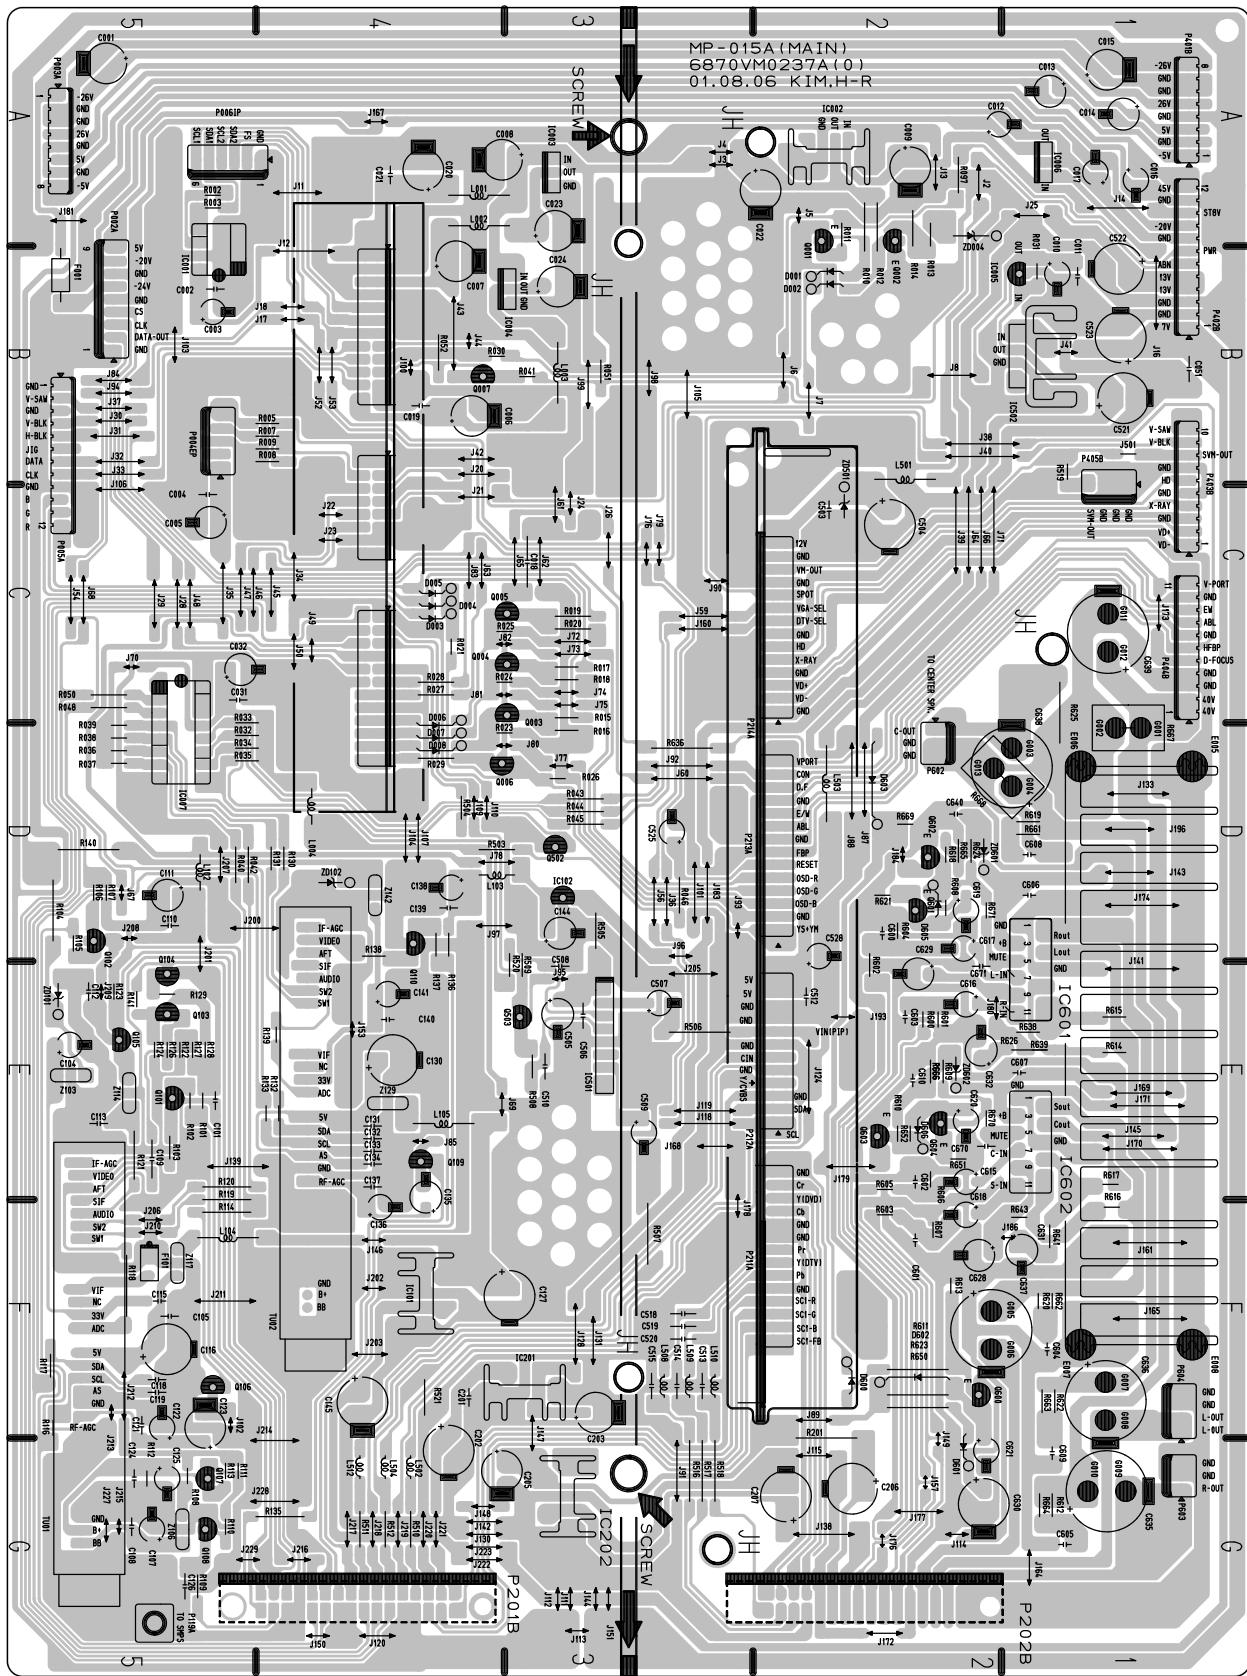

COMPONENT LOCATION GUIDE(SIGNAL)

C001.....A5	C503.....C2	E008.....F1	J46.....C5	J128.....F3	J501.....B1	R011.....A2	R131.....D4	R667.....D1
C002.....B5	C504.....C2	F001.....B5	J47.....C5	J130.....G4	L001.....A4	R012.....A2	R132.....E4	R668.....D2
C003.....B5	C505.....E3	F101.....F5	J48.....C5	J131.....F3	L002.....A4	R013.....A2	R133.....E4	R669.....D2
C004.....C5	C506.....E3	G001.....D1	J49.....C4	J133.....D1	L003.....B3	R014.....B2	R135.....G5	R670.....E2
C005.....C5	C507.....E3	G002.....D1	J50.....C4	J138.....G2	L004.....D4	R015.....C3	R136.....E4	R671.....D2
C006.....B4	C508.....E3	G003.....D2	J52.....B4	J139.....E5	L102.....D5	R016.....D3	R137.....E4	TU01.....G5
C007.....B4	C509.....E3	G004.....D2	J53.....B4	J141.....E1	L103.....D4	R017.....C3	R138.....D4	TU02.....F4
C008.....A4	C510.....E3	G005.....F2	J54.....C5	J142.....G4	L104.....F5	R018.....C3	R139.....E4	Z103.....E5
C009.....A2	C512.....E2	G006.....F2	J56.....D3	J143.....D1	L105.....E4	R019.....C3	R140.....D5	Z106.....G5
C010.....B1	C513.....F3	G007.....F1	J59.....C3	J144.....G3	L501.....B2	R020.....C3	R141.....E5	Z114.....E5
C011.....B1	C514.....F3	G008.....F1	J60.....D3	J145.....E1	L502.....G4	R021.....C4	R201.....G2	Z117.....F5
C012.....A2	C515.....F3	G009.....G1	J61.....B3	J146.....F4	L503.....D2	R023.....D4	R503.....D4	Z129.....E4
C013.....A1	C518.....F3	G010.....G1	J62.....C3	J147.....G3	L504.....G4	R024.....C4	R504.....D4	Z142.....D4
C014.....A1	C519.....F3	G011.....C1	J63.....C4	J148.....G4	L508.....F3	R025.....C3	R505.....D3	ZD004....A2
C015.....A1	C520.....F3	G012.....C1	J64.....B2	J149.....F2	L509.....F3	R026.....D3	R506.....E3	ZD101...E5
C016.....A1	C521.....B1	G013.....D2	J65.....C3	J150.....G4	L510.....F3	R027.....C4	R507.....F3	ZD102...D4
C017.....A1	C522.....B1	IC001.....B5	J66.....B2	J151.....G3	L512.....G4	R028.....C4	R508.....E3	ZD501...C2
C018.....C3	C523.....B1	IC002.....A2	J67.....D5	J153.....E4	P602.....D2	R029.....D4	R509.....D3	ZD601...D2
C019.....B4	C525.....D3	IC003.....A3	J68.....C5	J157.....G2	P603.....G1	R030.....B4	R510.....G4	ZD602...E2
C020.....A4	C528.....D2	IC004.....B4	J69.....E4	J160.....C3	P604.....F1	R031.....B1	R511.....G4	
C021.....A4	C600.....D2	IC005.....B2	J70.....C5	J161.....F1	P002A....B5	R032.....D5	R512.....G4	
C022.....A3	C601.....F2	IC006.....A1	J71.....B2	J164.....G1	P003A....A5	R033.....D5	R516.....F3	
C023.....A3	C602.....E2	IC007.....C5	J72.....C3	J165.....F1	P004EP..B5	R034.....D5	R517.....F3	
C024.....B3	C603.....E2	IC101.....F4	J73.....C3	J167.....A4	P005A....B5	R035.....D5	R518.....F3	
C031.....C5	C604.....F1	IC102.....D3	J74.....C3	J168.....E3	P006IP...A5	R036.....D5	R519.....C1	
C032.....C5	C605.....G1	IC201.....F3	J75.....C3	J169.....E1	P119A....G5	R037.....D5	R520.....D4	
C051.....B1	C606.....D2	IC202.....G3	J76.....C3	J170.....E1	P201B....G4	R038.....D5	R521.....F4	
C101.....E5	C607.....E1	IC501.....E3	J77.....D3	J171.....E1	P202B....G2	R039.....D5	R600.....E2	
C104.....E5	C608.....D2	IC502.....B2	J78.....D4	J172.....G2	P211A....F2	R040.....D5	R601.....E2	
C105.....F5	C609.....G1	J2.....A2	J79.....C3	J173.....C1	P212A....E2	R041.....B4	R602.....D2	
C107.....G5	C610.....E2	J3.....A3	J80.....D4	J174.....D1	P213A....D2	R042.....D5	R603.....F2	
C108.....G5	C615.....E2	J4.....A3	J81.....C4	J176.....G2	P214A....C2	R043.....D3	R604.....D2	
C109.....E5	C616.....E2	J5.....A2	J82.....C4	J177.....G2	P401B....A1	R044.....D3	R605.....E2	
C110.....D5	C617.....D2	J6.....B2	J83.....C4	J178.....E3	P402B....B1	R045.....D3	R606.....E2	
C111.....D5	C618.....F2	J7.....B2	J84.....B5	J179.....E2	P403B....C1	R046.....D3	R607.....F2	
C112.....E5	C619.....D2	J8.....B2	J85.....E4	J180.....E2	P404B....C1	R048.....C5	R608.....D2	
C113.....E5	C620.....E2	J11.....A4	J87.....D2	J181.....A5	P405B....C1	R050.....C5	R609.....E2	
C115.....F5	C621.....G2	J12.....B4	J88.....D2	J183.....D3	Q001.....A2	R051.....B3	R610.....E2	
C116.....F5	C628.....F2	J13.....A2	J89.....F2	J184.....D2	Q002.....B2	R052.....B4	R611.....F2	
C118.....F5	C629.....E2	J14.....A1	J90.....C3	J186.....F2	Q003.....C4	R097.....A2	R612.....G1	
C119.....F5	C630.....G2	J16.....B1	J91.....F3	J193.....E2	Q004.....C4	R101.....E5	R613.....F2	
C121.....F5	C631.....F1	J17.....B4	J92.....D3	J196.....D1	Q005.....C4	R102.....E5	R614.....E1	
C122.....F5	C632.....E2	J18.....B4	J93.....D3	J200.....D5	Q006.....D3	R103.....E5	R615.....E1	
C123.....F5	C635.....G1	J20.....B4	J94.....B5	J201.....E5	Q007.....B4	R104.....D5	R616.....F1	
C124.....G5	C636.....F1	J21.....C4	J95.....E3	J202.....F4	Q101.....E5	R105.....D5	R617.....E1	
C125.....G5	C637.....F2	J22.....C4	J96.....D3	J203.....F4	Q102.....D5	R106.....D5	R618.....D2	
C126.....G5	C638.....D2	J23.....C4	J97.....D4	J205.....E3	Q103.....E5	R107.....D5	R619.....D2	
C127.....F4	C639.....C1	J24.....C3	J98.....B3	J206.....F5	Q104.....E5	R108.....G5	R620.....F1	
C130.....E4	C640.....D2	J25.....A2	J99.....B3	J207.....D5	Q105.....E5	R109.....G5	R621.....D2	
C131.....E4	C670.....E2	J26.....C3	J100.....B4	J208.....D5	Q106.....F5	R110.....G5	R622.....F1	
C132.....E4	C671.....E2	J28.....C5	J101.....D3	J209.....E5	Q107.....G5	R111.....G5	R623.....F2	
C133.....E4	D001.....B2	J29.....C5	J102.....F5	J210.....F5	Q108.....G5	R112.....G5	R624.....D2	
C134.....E4	D002.....B2	J30.....B5	J103.....B5	J211.....F5	Q109.....E4	R113.....G5	R625.....C1	
C135.....E4	D003.....C4	J31.....B5	J104.....D4	J212.....F5	Q110.....D4	R114.....F5	R626.....E2	
C136.....F4	D004.....C4	J32.....B5	J105.....B3	J213.....F5	Q502.....D3	R116.....F5	R636.....D3	
C137.....E4	D005.....C4	J33.....B5	J106.....C5	J214.....G5	Q503.....E3	R117.....F5	R638.....E2	
C138.....D4	D006.....C4	J34.....C4	J107.....D4	J215.....G5	Q600.....F2	R118.....F5	R639.....E1	
C139.....D4	D007.....D4	J35.....C5	J109.....D4	J216.....G4	Q601.....D2	R119.....F5	R641.....F1	
C140.....E4	D008.....D4	J36.....D3	J110.....D4	J217.....G4	Q602.....D2	R120.....E5	R643.....F2	
C141.....E4	D600.....F2	J37.....B5	J111.....G3	J218.....G4	Q603.....E2	R121.....E5	R650.....F2	
C144.....D3	D601.....G2	J38.....B2	J112.....G3	J219.....G4	Q604.....E2	R122.....E5	R651.....E2	
C145.....F4	D602.....F2	J39.....C2	J113.....G3	J220.....G4	R002.....A5	R123.....E5	R652.....E2	
C201.....F4	D603.....D2	J40.....B2	J114.....G2	J221.....G4	R003.....A5	R124.....E5	R661.....D2	
C202.....G4	D605.....D2	J41.....B1	J115.....G2	J222.....G4	R005.....B5	R126.....E5	R662.....F1	
C203.....F3	D606.....E2	J42.....B4	J118.....E3	J223.....G4	R007.....B5	R127.....E5	R663.....F1	
C205.....G4	E005.....D1	J43.....B4	J119.....E3	J227.....G5	R008.....B4	R128.....E5	R664.....G1	
C206.....G2	E006.....D1	J44.....B4	J120.....G4	J228.....G5	R009.....B4	R129.....E5	R665.....D2	
C207.....G2	E007.....F1	J45.....C4	J124.....E2	J229.....G5	R010.....A2	R130.....D4	R666.....E2	


MAIN2 (DEF)

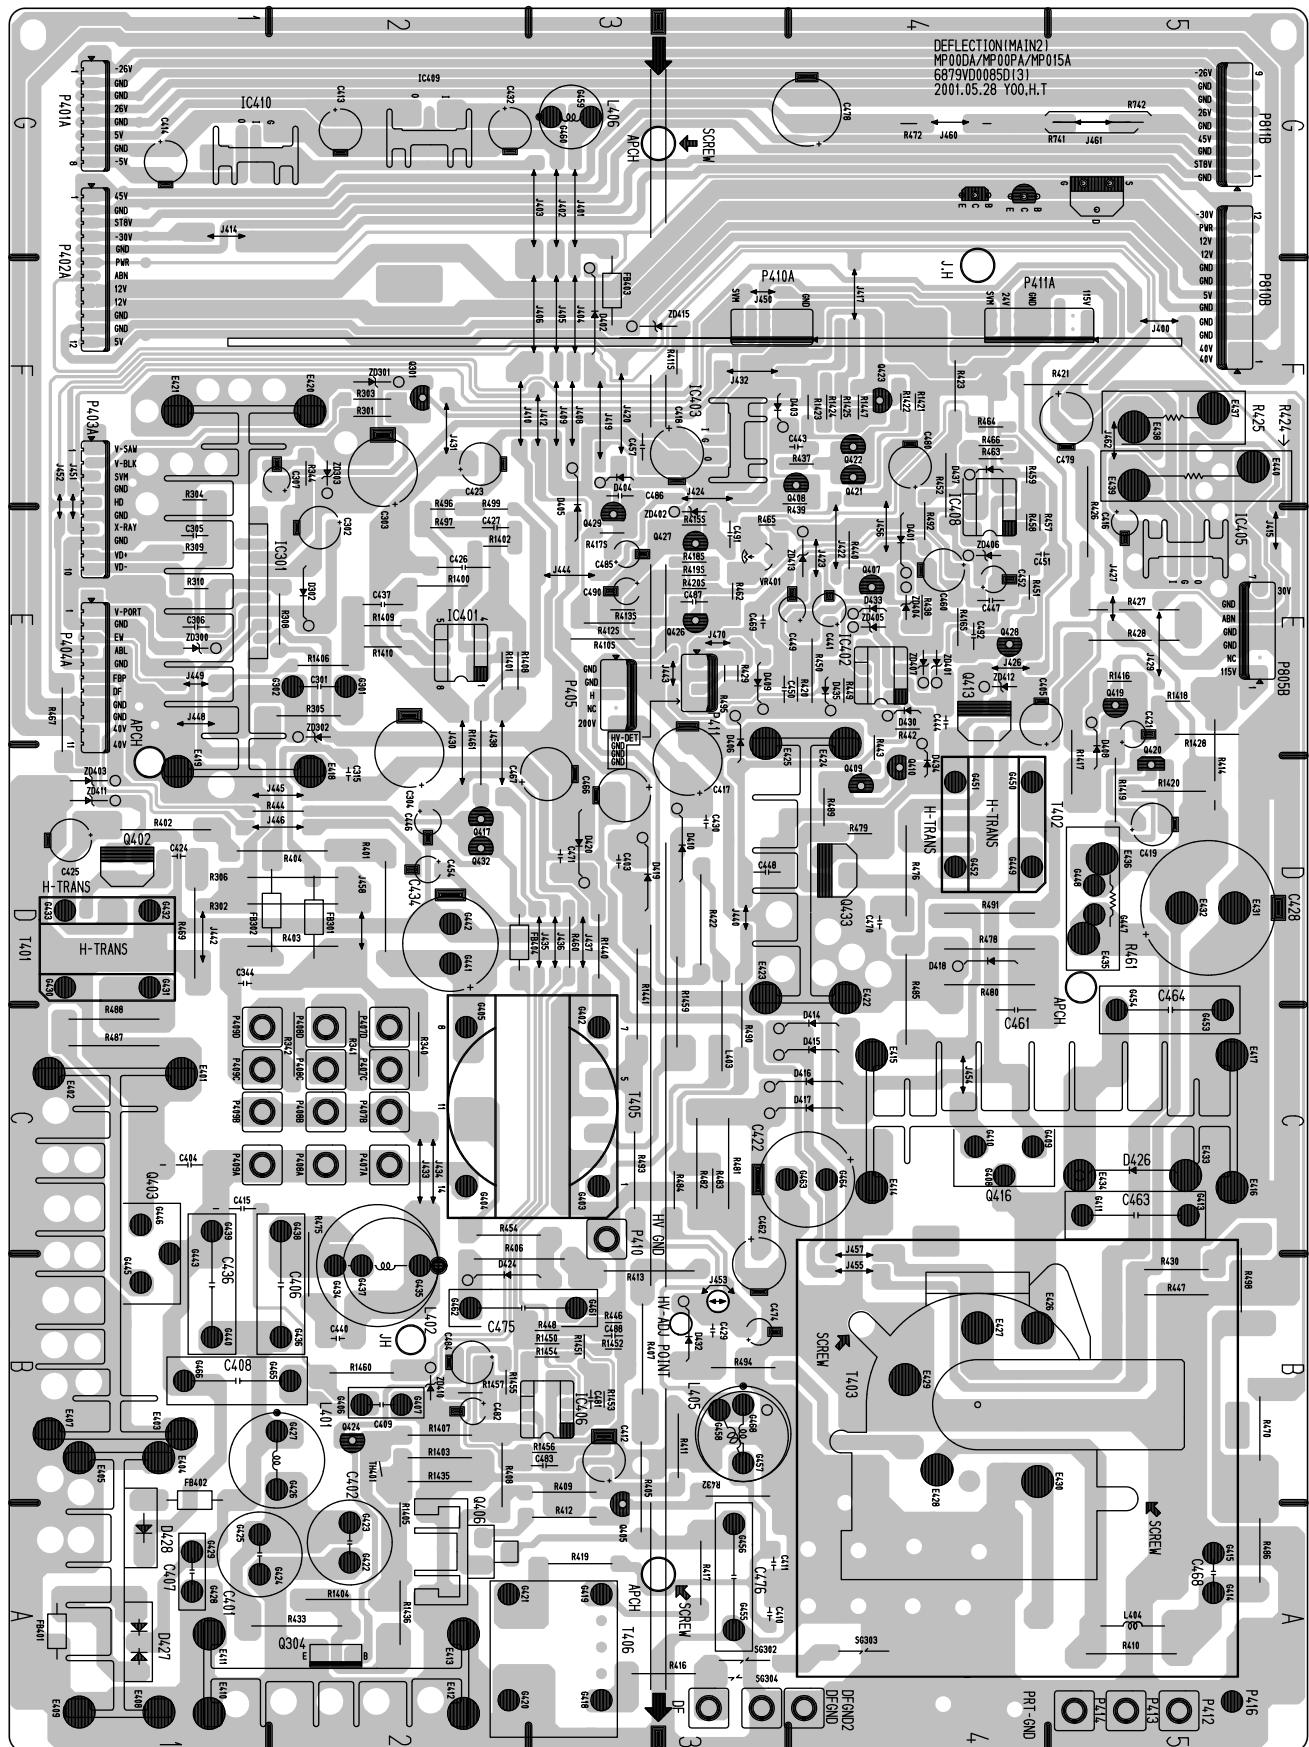


COMPONENT LOCATION GUIDE(DEF)

C301.....E2	C457.....F3	D437.....F4	G405C2	G463C4	J451.....F1	Q409.....D4	R427.....E5	R495.....E3	R420SE3
C302.....E2	C460.....E4	DFA3	G406B2	G464C4	J452.....F1	Q410.....D4	R428.....E5	R496.....E2	SG302....A3
C303.....F2	C461C5	DFGND ..A3	G407B2	G465B2	J453B3	Q413E4	R429.....E3	R497.....E2	SG303....A4
C304.....E2	C462.....B3	DFGND2 A4	G408C4	G466B1	J454C4	Q416.....C4	R430.....B5	R498C5	SG304....A3
C305.....E1	C463C5	E401.....C1	G409C4	G468B3	J455B4	Q417D2	R432.....B3	R499.....E2	T401.....D1
C306.....E1	C464C5	E402.....C1	G410C4	IC301.....E2	J456E4	Q419E5	R433.....A1	R741G5	T402.....D4
C307.....F2	C466D3	E403.....B1	G411C5	IC401.....E2	J457B4	Q420.....D5	R437.....F4	R742G5	T403.....B4
C315D2	C467D3	E404.....B1	G413C5	IC402.....E4	J458D2	Q421.....F4	R438.....E4	R1400....E2	T405.....C3
C344D1	C468.....A5	E405.....B1	G414A5	IC403.....F3	J460G4	Q422.....F4	R439.....F4	R1401....E2	T406.....A3
C401.....A2	C469.....E3	E407.....B1	G415A5	IC405.....E5	J461G5	Q423.....F4	R440.....E4	R1402....E3	TH401....B2
C402.....A2	C470D4	E408.....A1	G418A3	IC406.....B3	J462.....F5	Q424B2	R442.....E4	R1403....B2	VR401....E3
C403D3	C471D3	E409.....A1	G419A3	IC408.....E4	J470E3	Q426E3	R443D4	R1404....A2	ZD300E1
C404C1	C474.....B3	E410.....A1	G420A2	IC409G2	L401B2	Q427E3	R444D1	R1405....A2	ZD301....F2
C405.....E4	C475.....B2	E411.....A1	G421A2	IC410.....G2	L402B2	Q428E4	R446.....B3	R1406....E2	ZD302....E2
C406.....B2	C476.....A3	E412.....A2	G422A2	J400.....F5	L403D3	Q429E3	R447.....B5	R1407....B2	ZD303....F2
C407.....A1	C478.....G4	E413.....A2	G423A2	J401G3	L404A5	Q432.....D2	R448.....B3	R1408....E3	ZD401E4
C408.....B2	C479.....F5	E414.....C4	G424A2	J402G3	L405B3	Q433D4	R449.....E4	R1409....E2	ZD402....E3
C409.....B2	C480.....F4	E415.....C4	G425A2	J403G3	L406G3	R301.....F2	R450.....E4	R1410....E2	ZD403....D1
C410.....A3	C481.....B3	E416.....C5	G426B2	J404.....F3	P405.....E3	R302D1	R451.....E4	R1416....E5	ZD404E4
C411.....A3	C482.....B2	E417.....C5	G427B2	J405.....F3	P410.....C3	R303.....F2	R452.....F4	R1417....E5	ZD405....E4
C412.....B3	C483.....B3	E418.....D2	G428A1	J406.....F3	P411.....E3	R304.....F1	R454C2	R1418....E5	ZD406....E4
C413.....G2	C484.....B2	E419.....D1	G429A1	J408.....F3	P412.....A5	R305.....E2	R457.....F4	R1419....E5	ZD407....E4
C414.....G1	C485.....E3	E420.....F2	G430D1	J409.....F3	P413.....A5	R306D1	R458.....F4	R1420D5	ZD410B2
C415C2	C486.....F3	E421.....F1	G431D1	J410.....F3	P414.....A5	R308.....E2	R459.....F4	R1421....F4	ZD411....D1
C416.....E5	C487.....E3	E422.....D4	G432D1	J412.....F3	P416.....A5	R309.....E1	R460D3	R1422....F4	ZD412....E4
C417.....E3	C488.....B3	E423.....D3	G433D1	J414G1	P401A....G1	R310.....E1	R461D5	R1423....F4	ZD413....E4
C418.....F3	C490.....E3	E424.....E4	G434B2	J415E5	P402A....G1	R340C2	R462.....E3	R1424....F4	ZD415....F3
C419D5	C491.....E3	E425.....E3	G435B2	J417.....F4	P403A....F1	R341C2	R463.....F4	R1425....F4	
C421.....E5	C492.....E4	E426.....B4	G436B2	J419.....F3	P404AE1	R342C2	R464.....F4	R1428....E5	
C422C4	D302.....E2	E427.....B4	G437B2	J420.....F3	P407AC2	R344.....F2	R465.....E3	R1435....B2	
C423.....F2	D401.....E4	E428.....B4	G438C2	J422.....F4	P407BC2	R401D2	R466.....F4	R1436....A2	
C424D1	D402.....F3	E429.....B4	G439C1	J423E4	P407CC2	R402D1	R467D1	R1440D3	
C425D1	D403.....F4	E430.....B4	G440B1	J424.....F3	P407DC2	R403D1	R469D1	R1441C3	
C426.....E2	D404.....F3	E431.....D5	G441D2	J426E4	P408AC2	R404D2	R470.....B5	R1447....F4	
C427.....E2	D405.....F3	E432.....D5	G442D2	J427E5	P408BC2	R405.....A3	R472G4	R1450....B3	
C428D5	D406.....E3	E433.....C5	G443C1	J429E5	P408CC2	R406.....B2	R475C2	R1451....B3	
C429.....B3	D408.....E5	E434.....C5	G445B1	J430E2	P408DC2	R407.....B3	R476D4	R1452....B3	
C430D3	D409.....E3	E435.....D5	G446C1	J431.....F2	P409AC2	R408.....B2	R478D4	R1453....B3	
C432.....G2	D410D3	E436.....D5	G447D5	J432.....F3	P409BC2	R409.....B3	R479D4	R1454....B3	
C434D2	D414C4	E437.....F5	G448D5	J433C2	P409CC2	R410.....A5	R480D4	R1455....B2	
C436.....B1	D415C4	E438.....F5	G449D4	J434C2	P409DC2	R411.....B3	R481C3	R1456....B3	
C437.....E2	D416C3	E439.....F5	G450D4	J435D3	P410A....F4	R412.....A3	R482C3	R1457....B2	
C440.....B2	D417C3	E440.....F5	G451D4	J436D3	P411A....F5	R413.....B3	R483C3	R1459....C3	
C441.....E4	D418D4	FB301 ...D2	G452D4	J437D3	P805BE5	R414.....E5	R484C3	R1460....B2	
C443.....F4	D419D3	FB302 ...D2	G453C5	J438E2	P810B....F5	R416.....A3	R485D4	R1461D2	
C444.....E4	D420D3	FB401...A1	G454C5	J440D3	P811B....G5	R417.....A3	R486.....A5	R410SE3	
C446D2	D424.....B2	FB402...B1	G455A3	J442D1	Q301.....F2	R419.....A3	R487C1	R411SF3	
C447.....E4	D426C5	FB403 ...G3	G456A3	J443E3	Q304A2	R420.....E4	R488C1	R412SE3	
C448D4	D428.....A1	FB404 ...D3	G457B3	J444E3	Q402D1	R421.....F5	R489D4	R413SE3	
C449.....E4	D430.....E4	G301E2	G458B3	J445D1	Q403B1	R422.....D3	R490D3	R415SE3	
C450.....E4	D432.....B3	G302E2	G459G3	J446D1	Q405A3	R423.....F4	R491D4	R416SE4	
C451.....E5	D433.....E4	G402C3	G460G3	J448E1	Q406A2	R424.....F5	R492F4	R417SE3	
C452.....E4	D434.....E4	G403C3	G461B3	J449E1	Q407E4	R425.....F5	R493C3	R418SE3	
C454D2	D435.....E4	G404C2	G462B2	J450.....F3	Q408.....F4	R426.....E5	R494B4	R419SE3	


SMPS (NARROW)

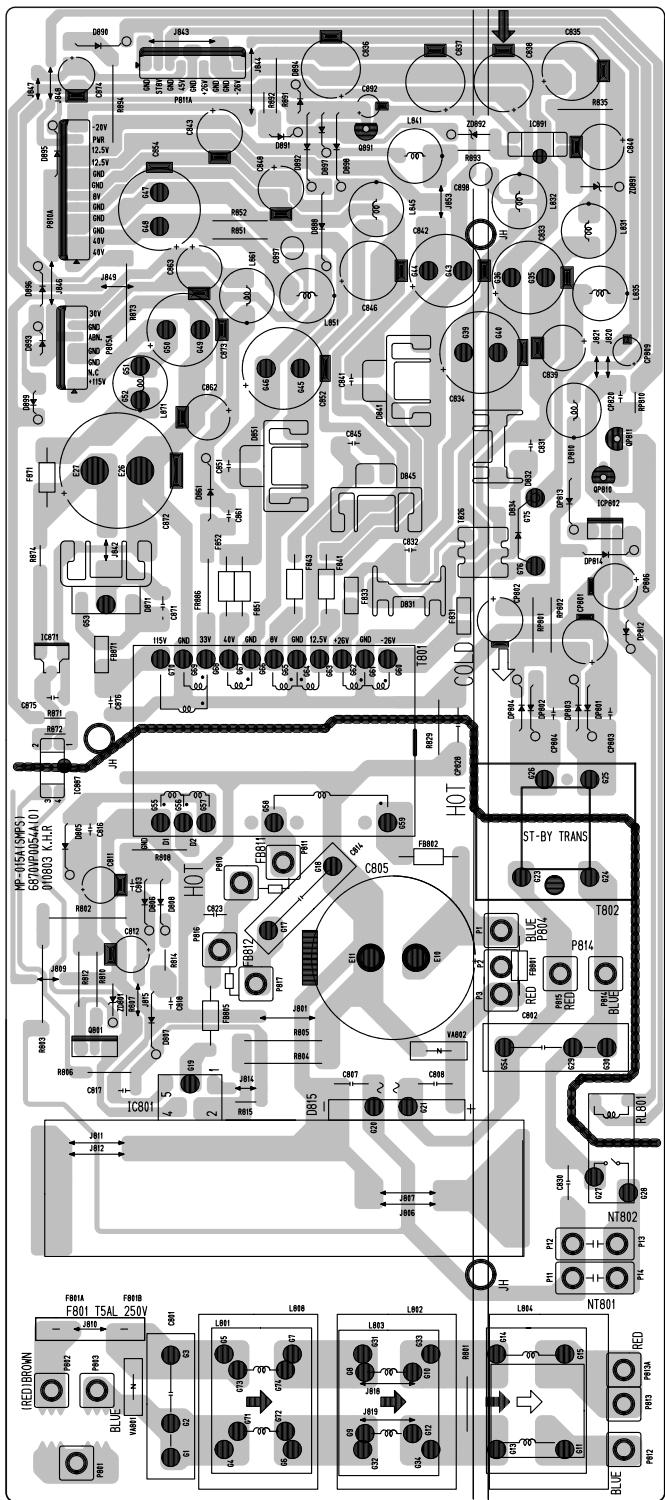


SMPS (WIDE)

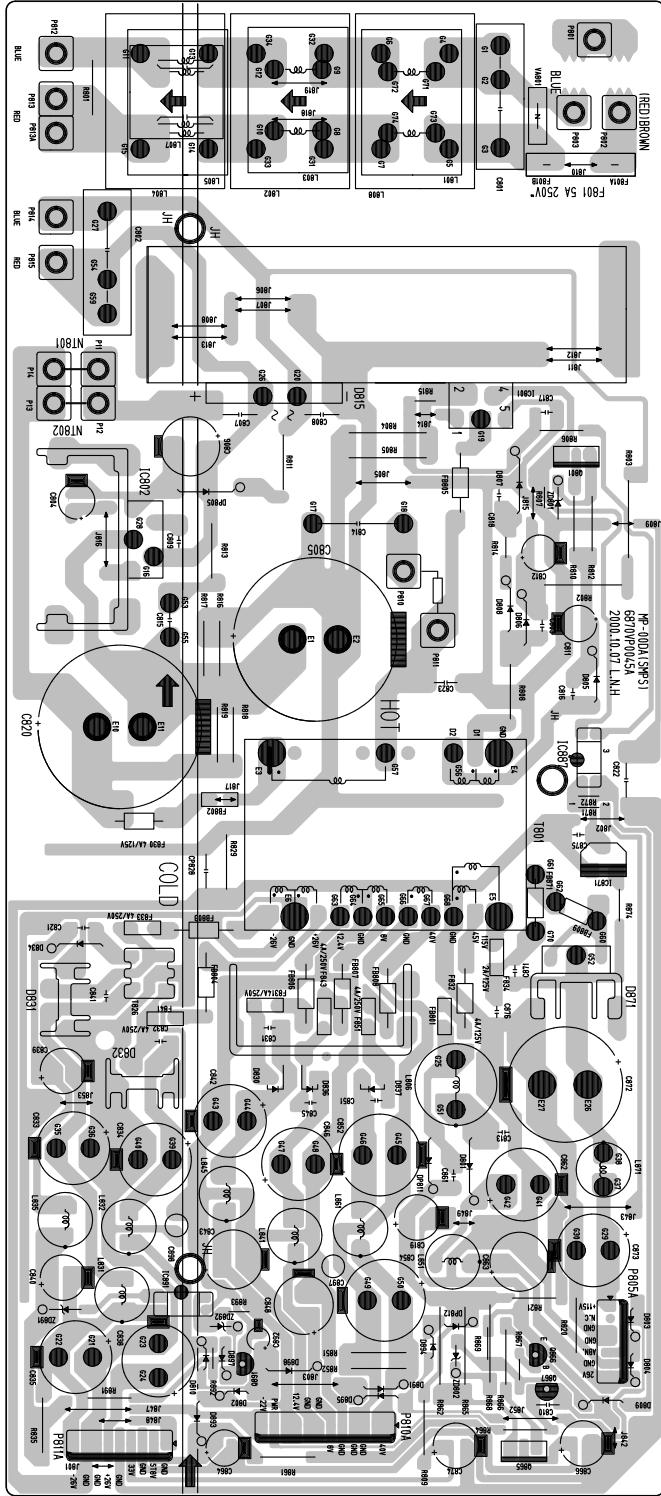


CPT

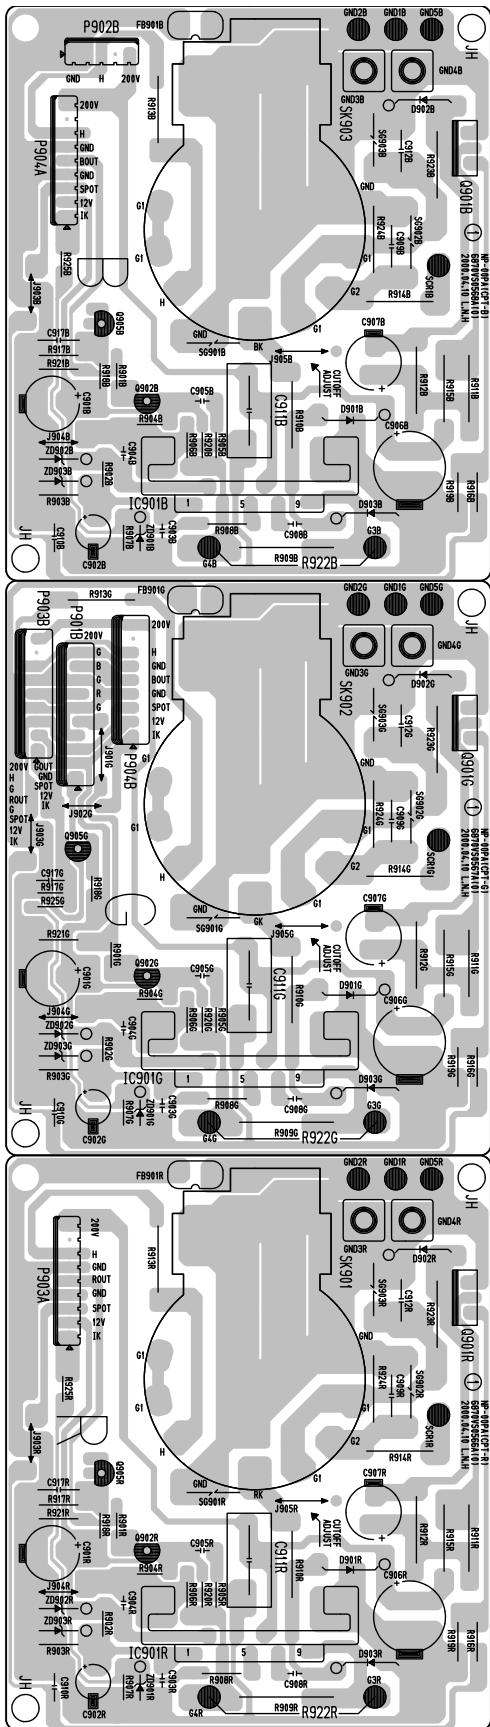


CONV-OUT

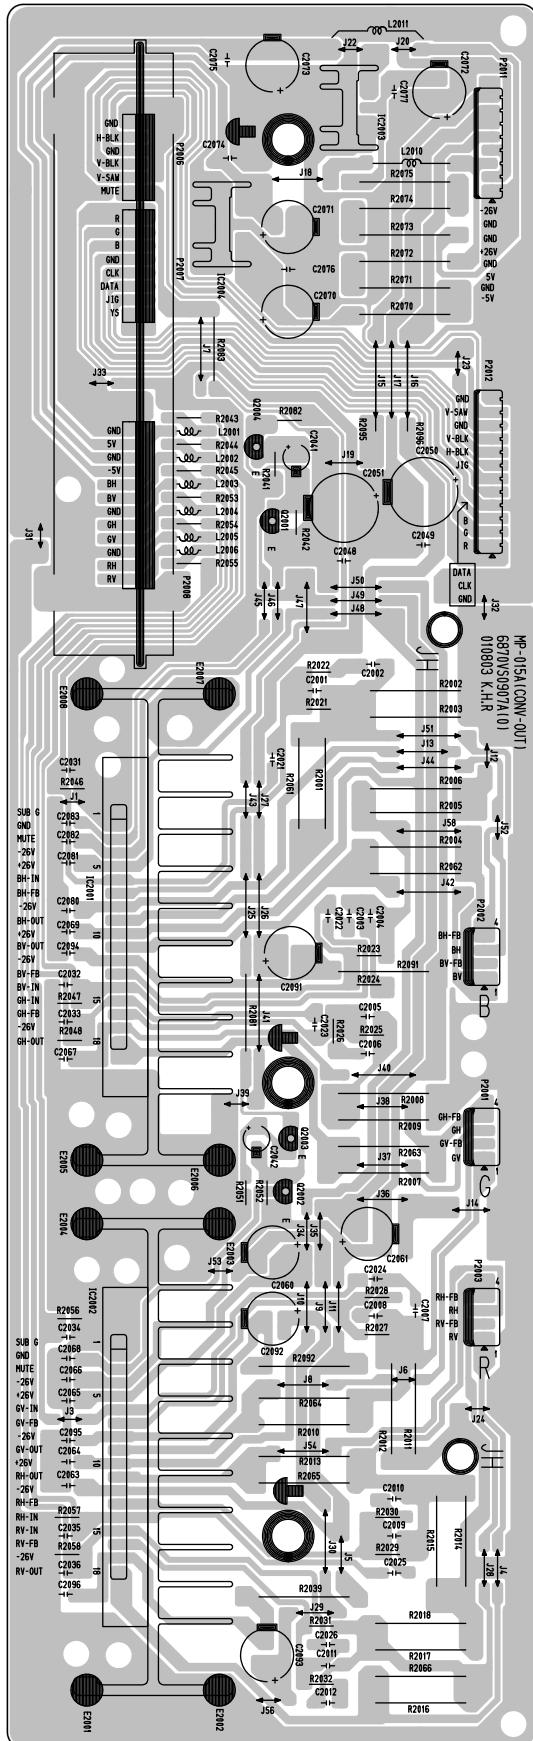


POWER S/W

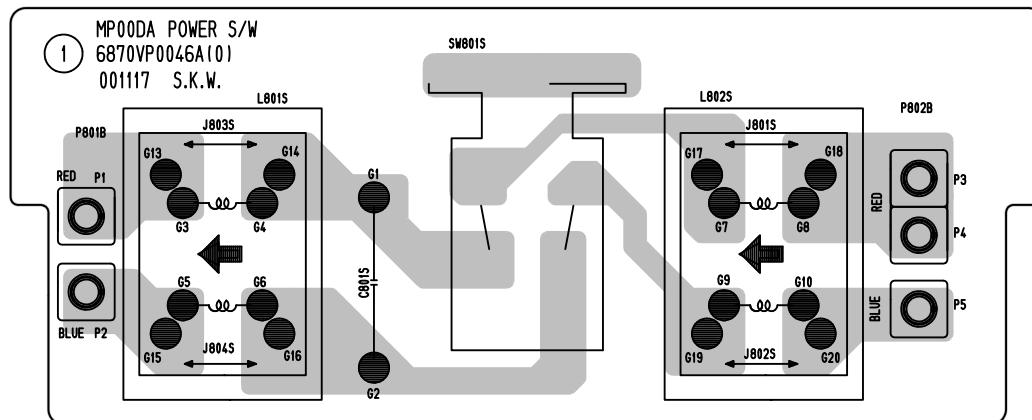


CONTROL

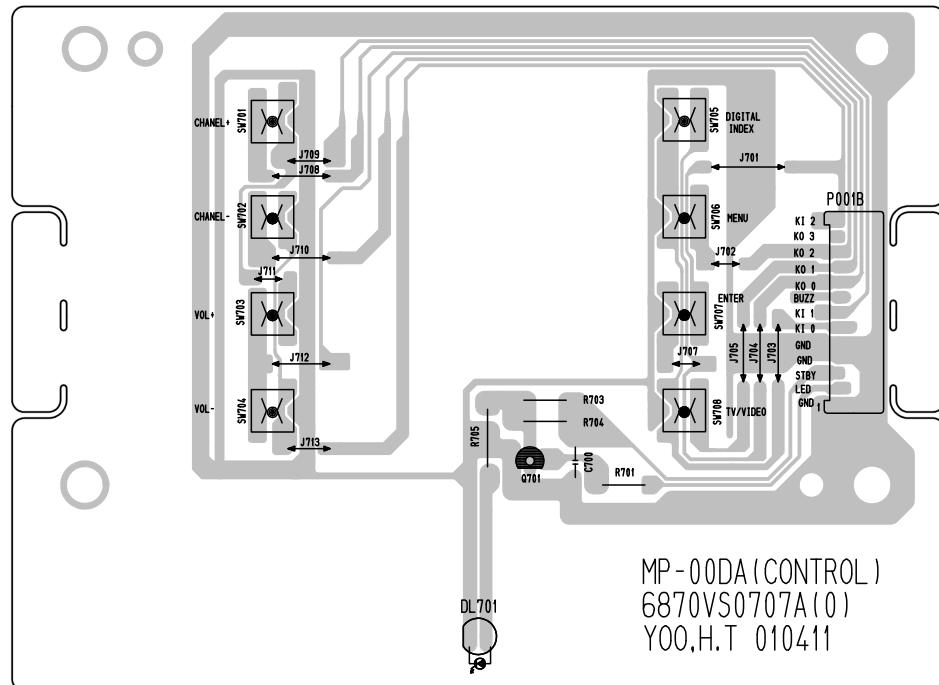


PRE-AMP

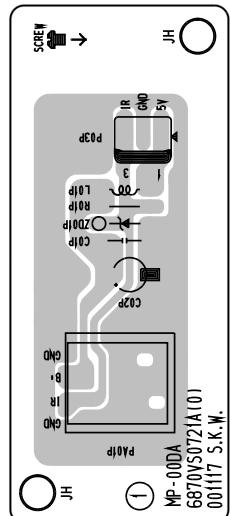


SIDE AV

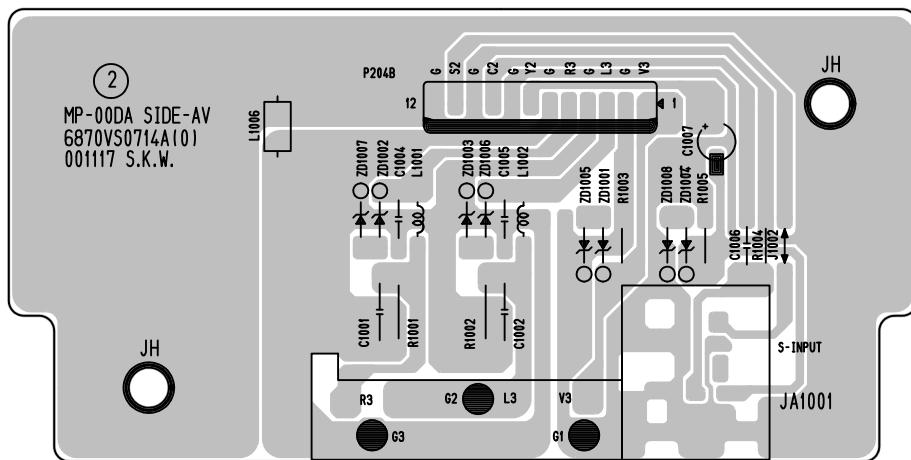


VM (TOP)

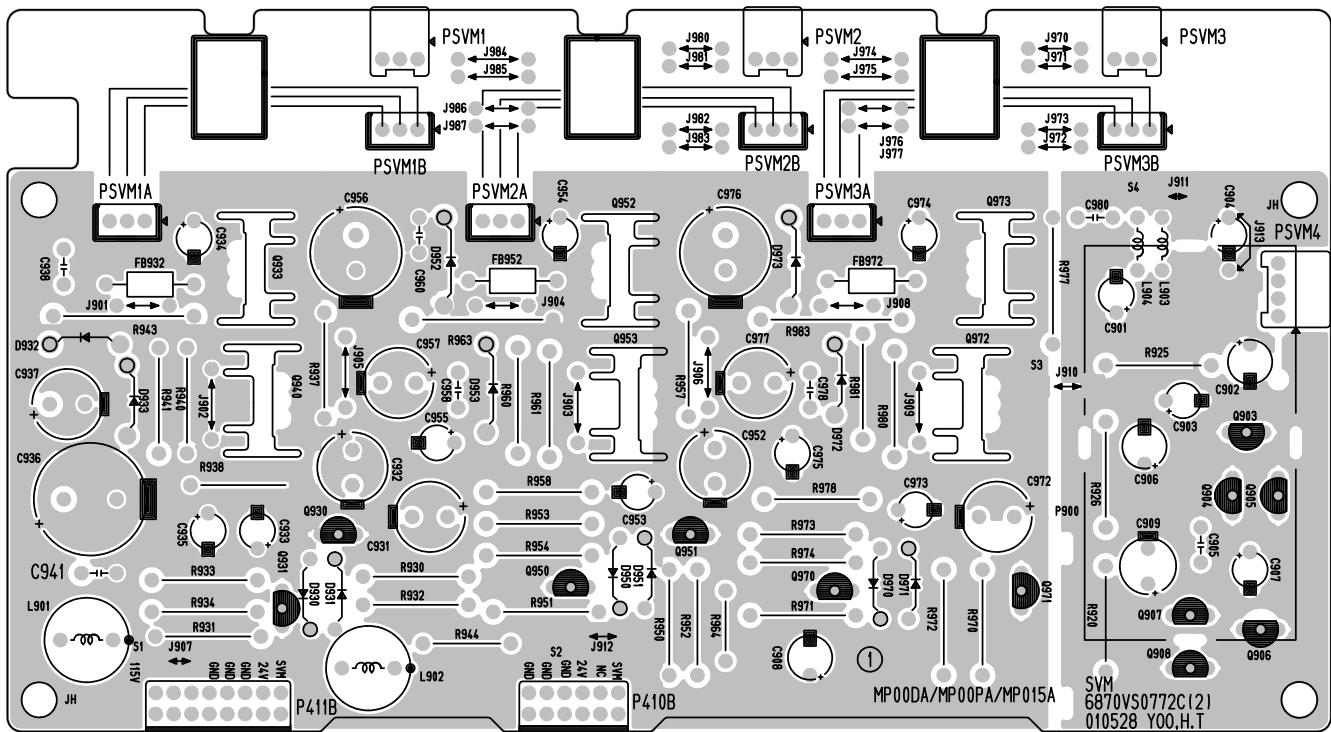


VM (BOTTOM)

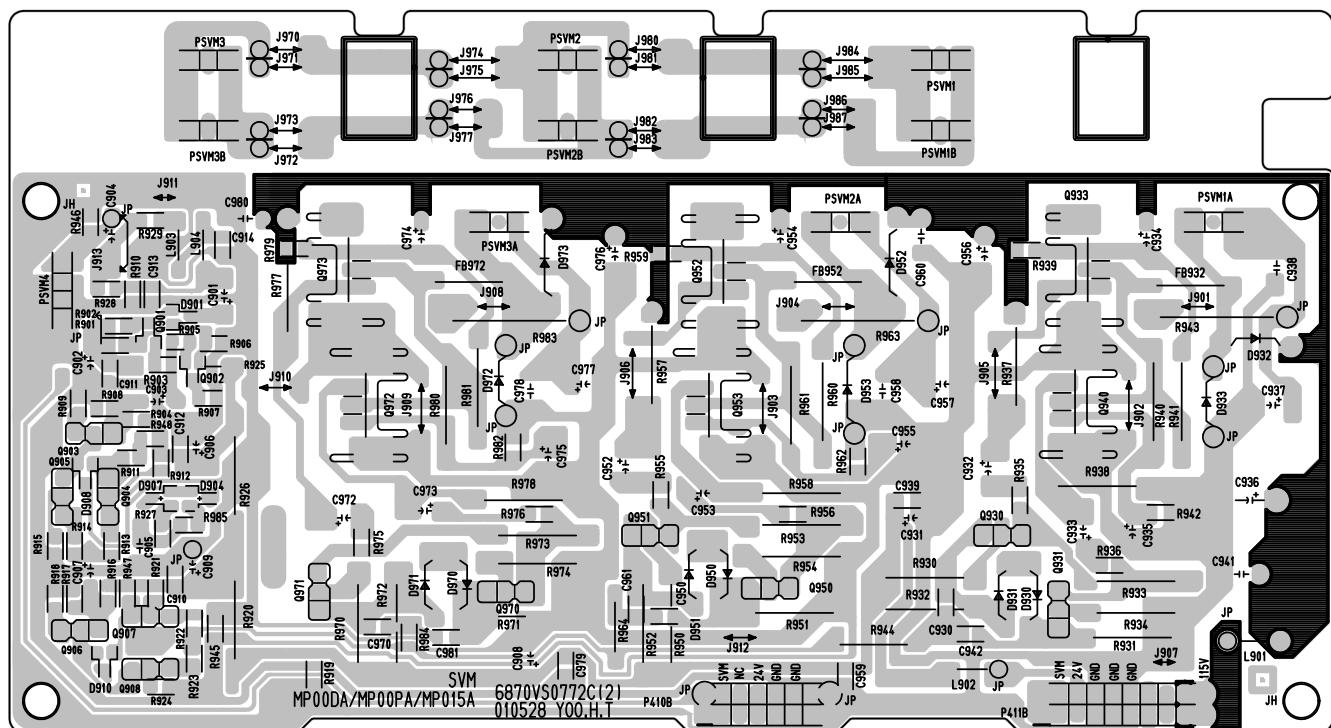


CONVERGENCE (TOP)

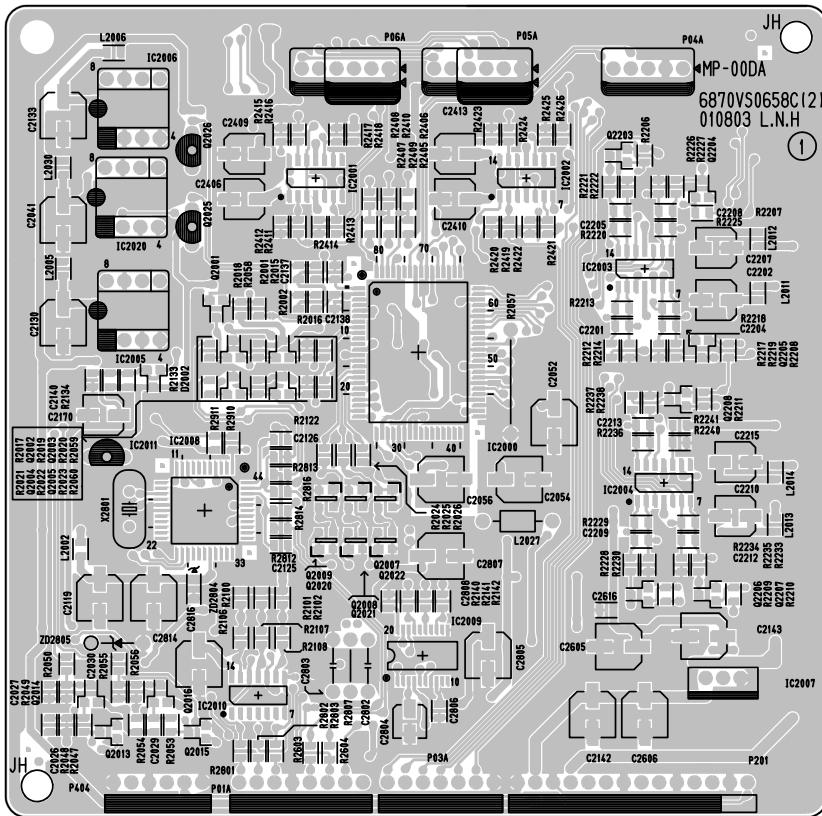


CONVERGENCE (BOTTOM)

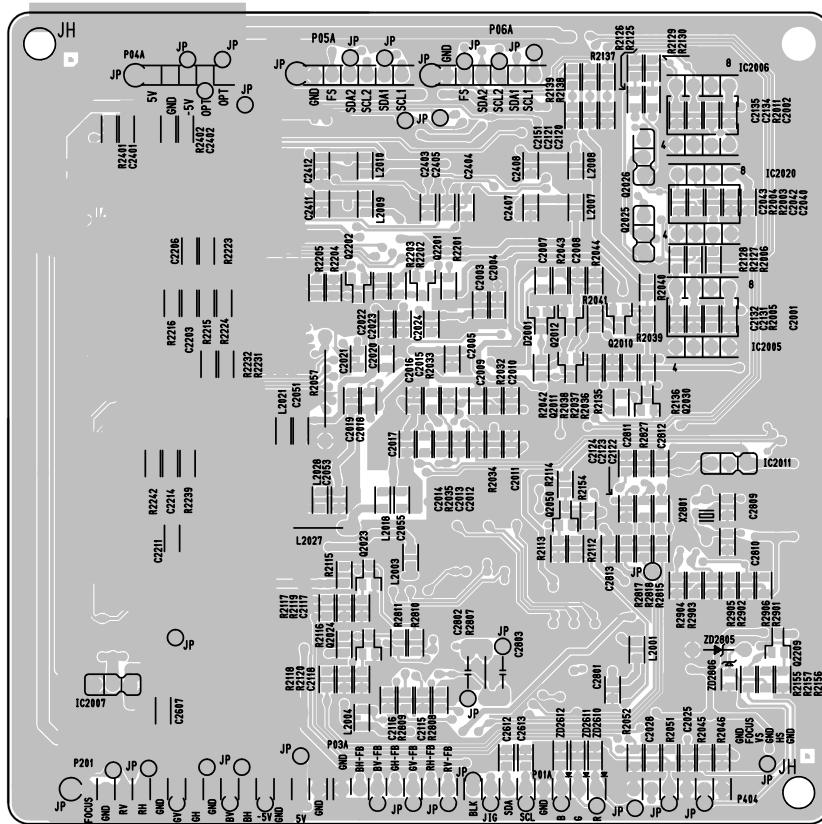


MICOM (TOP)

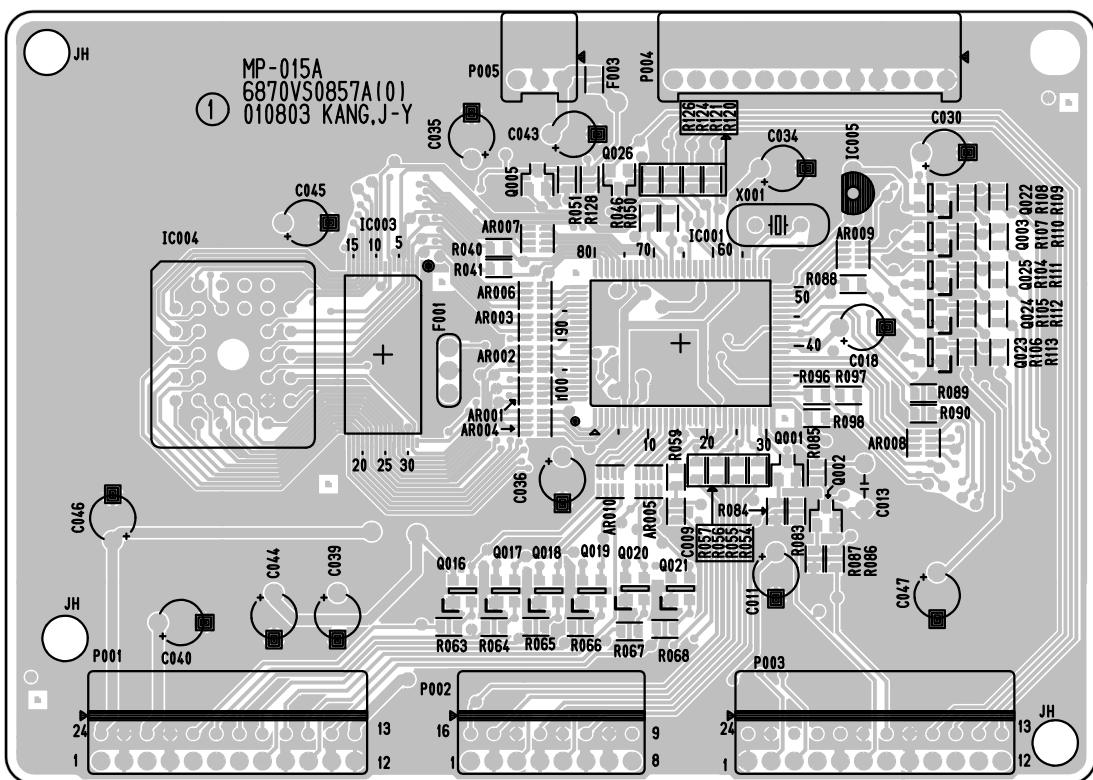


MICOM (BOTTOM)

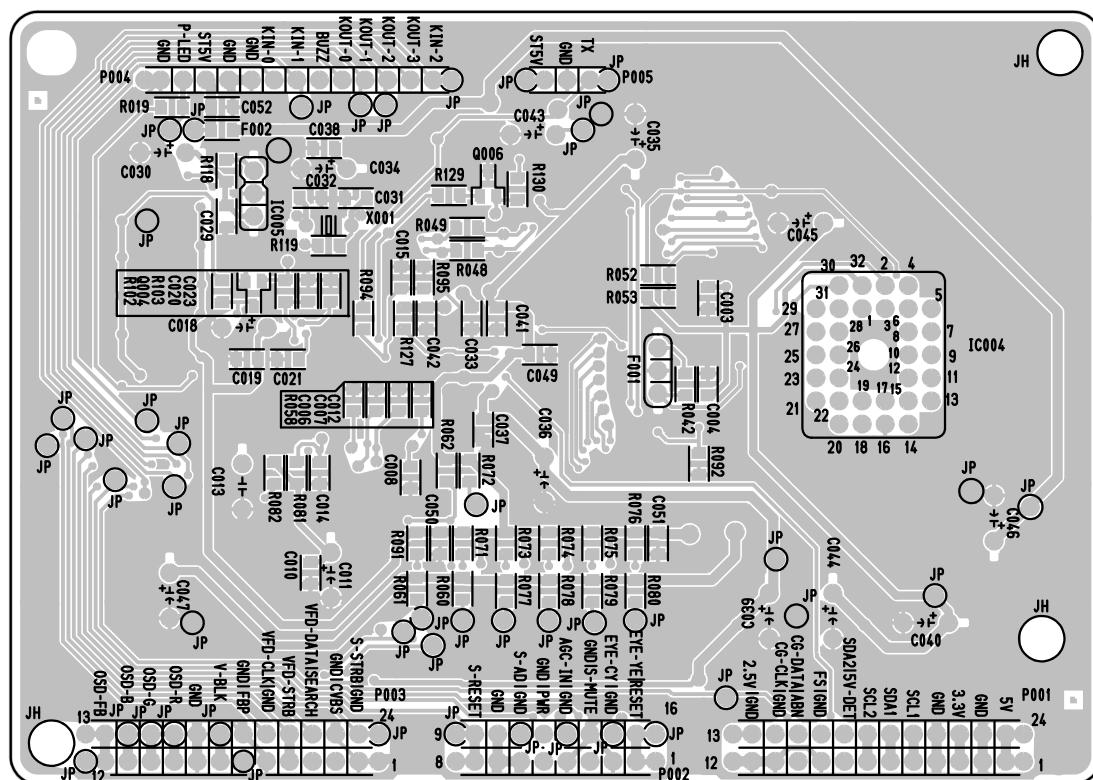


100HZ (TOP)

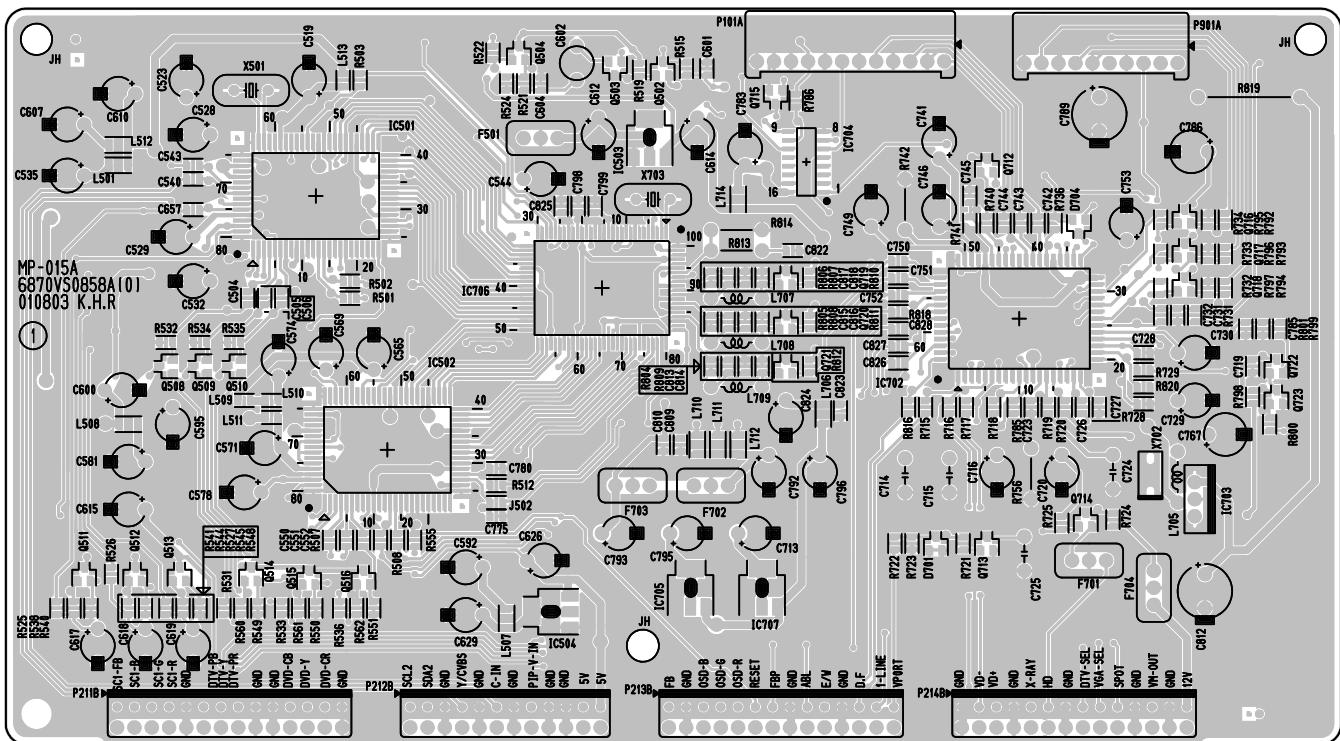


100HZ (BOTTOM)

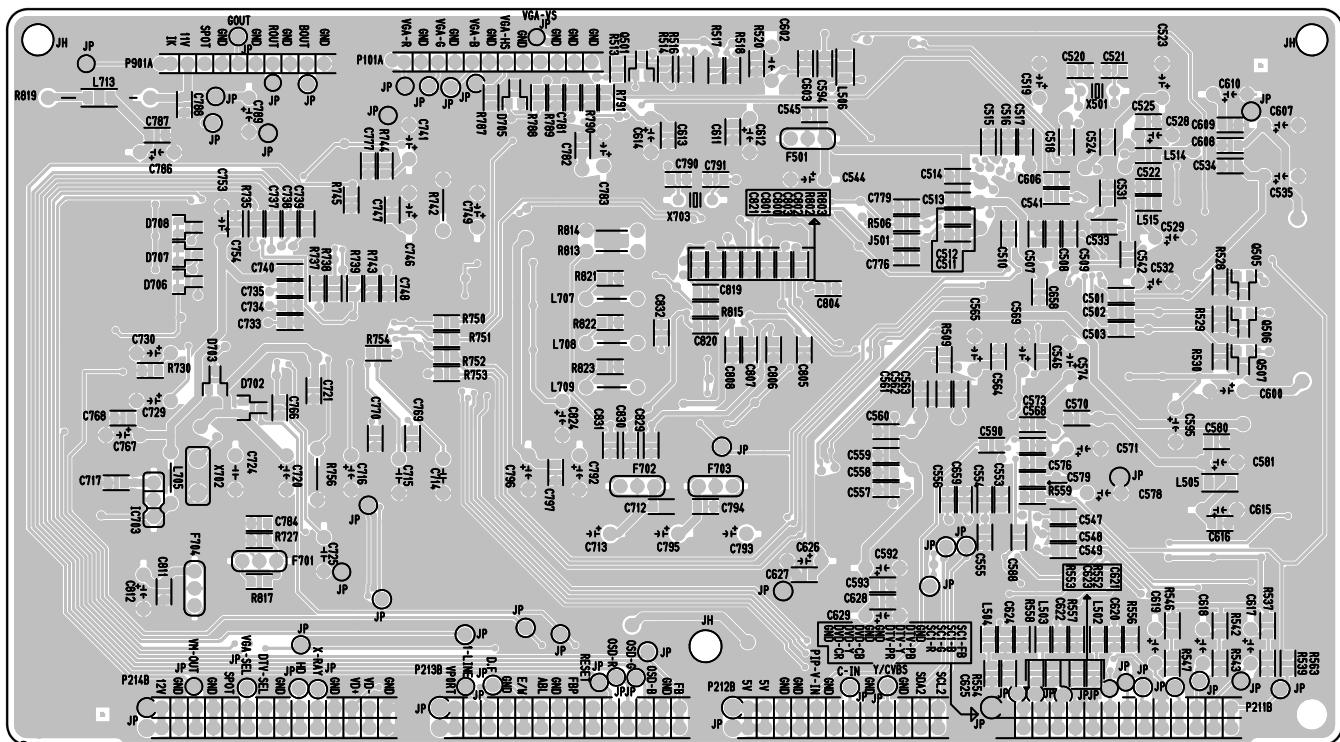

AV (TOP)

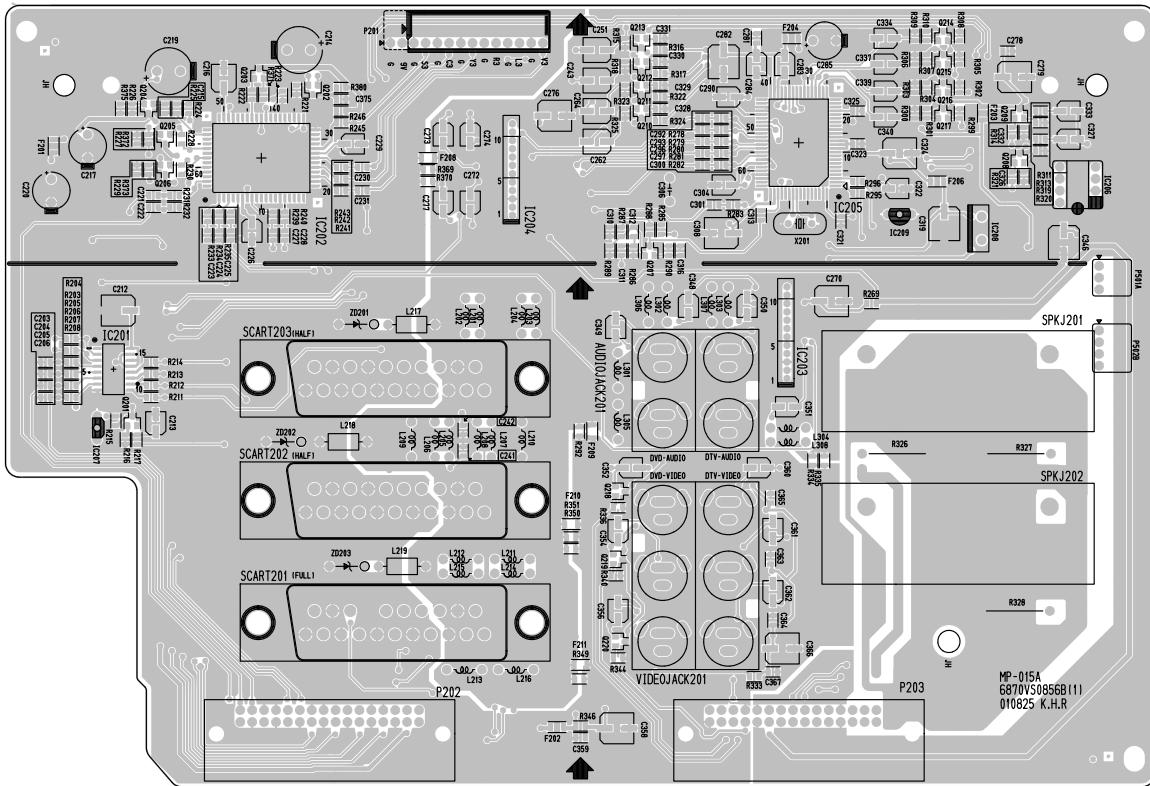


AV (BOTTOM)

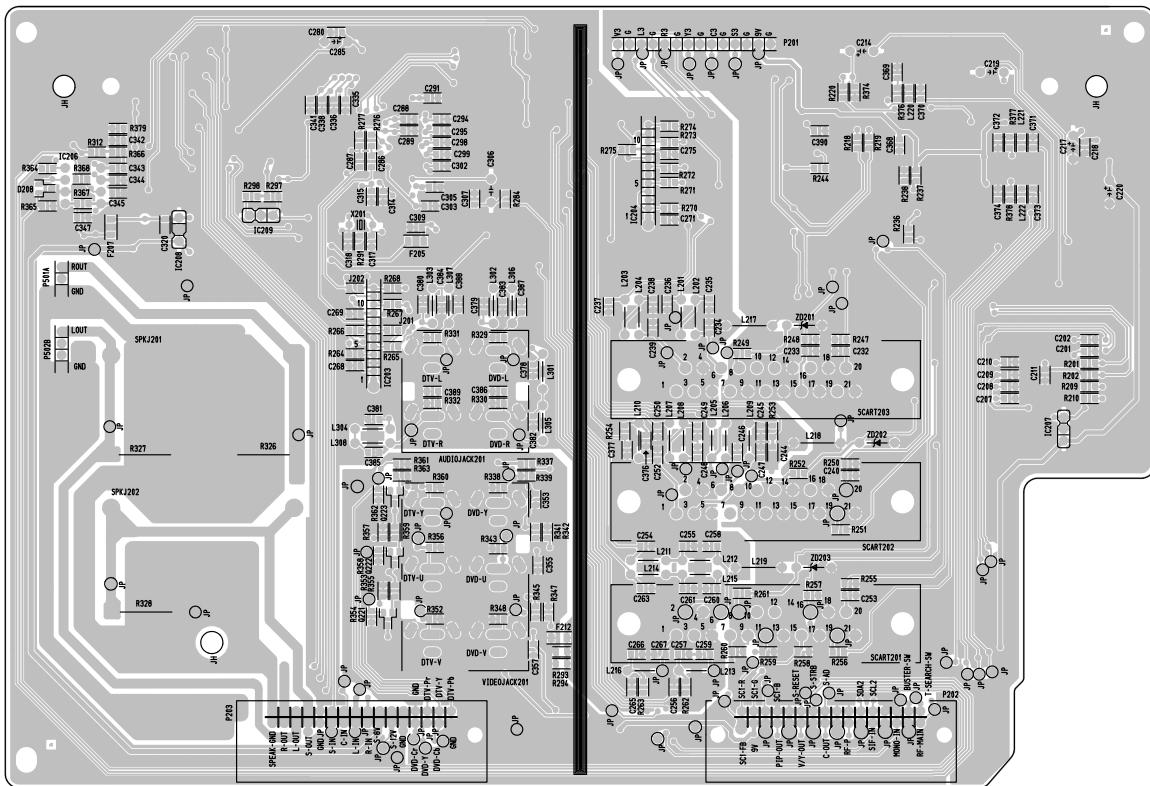


WIRING DIAGRAM

1. ITC & DYC

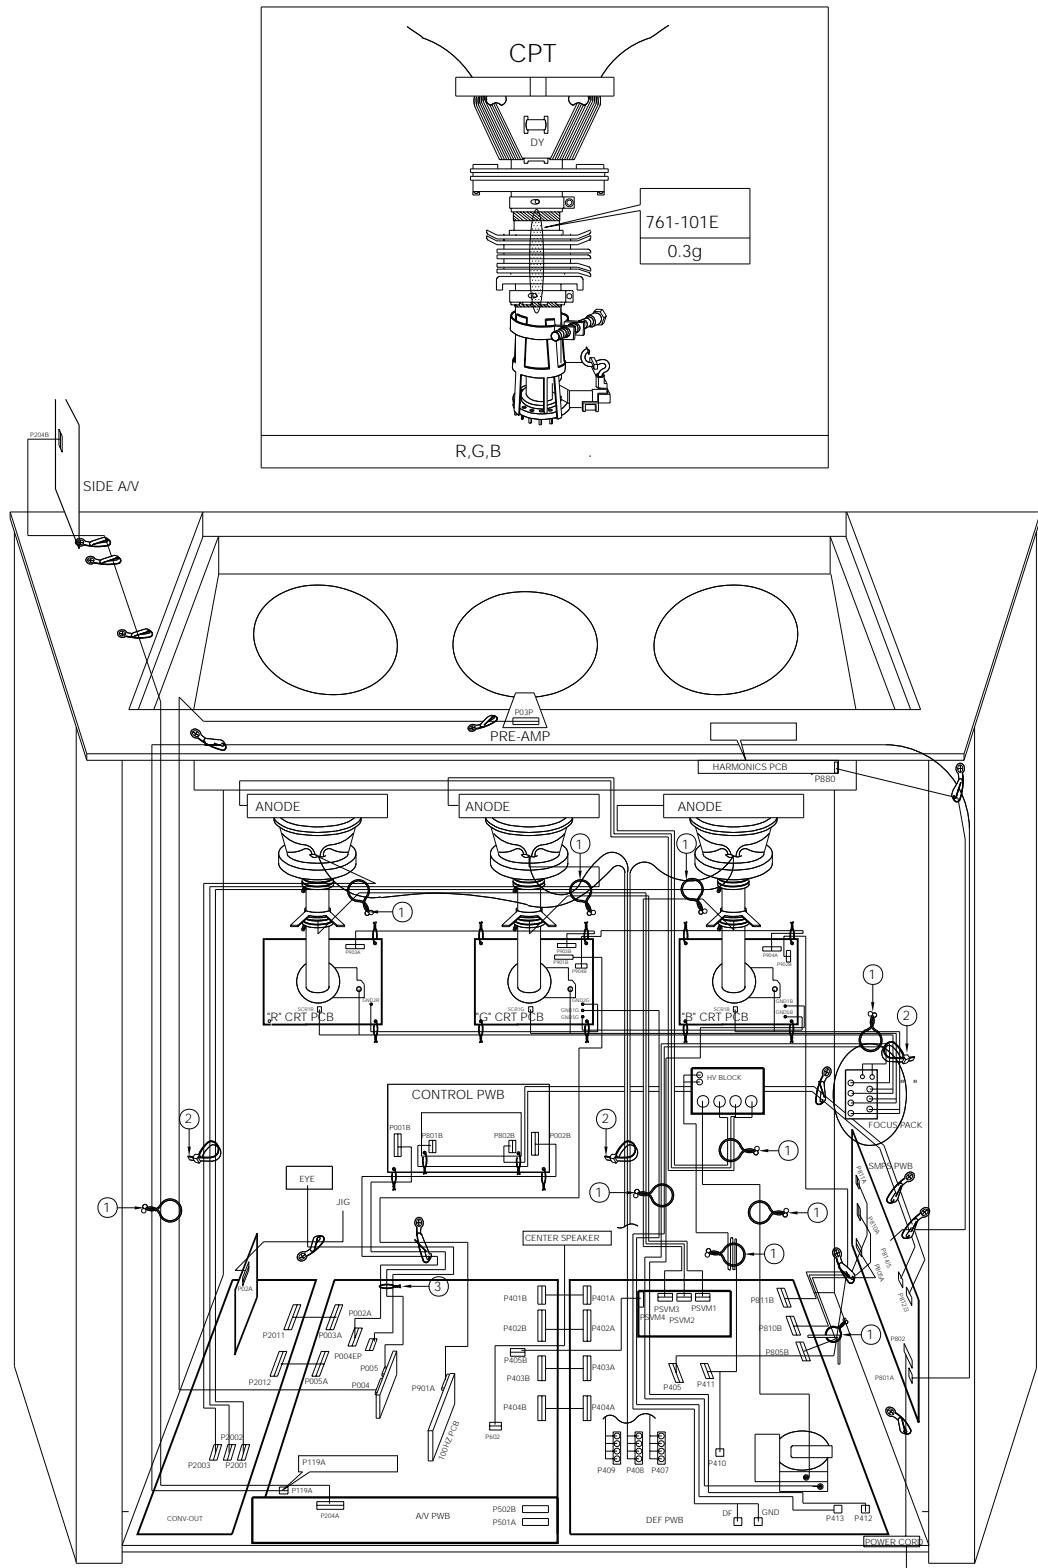

MEMO

EXPLODED VIEW

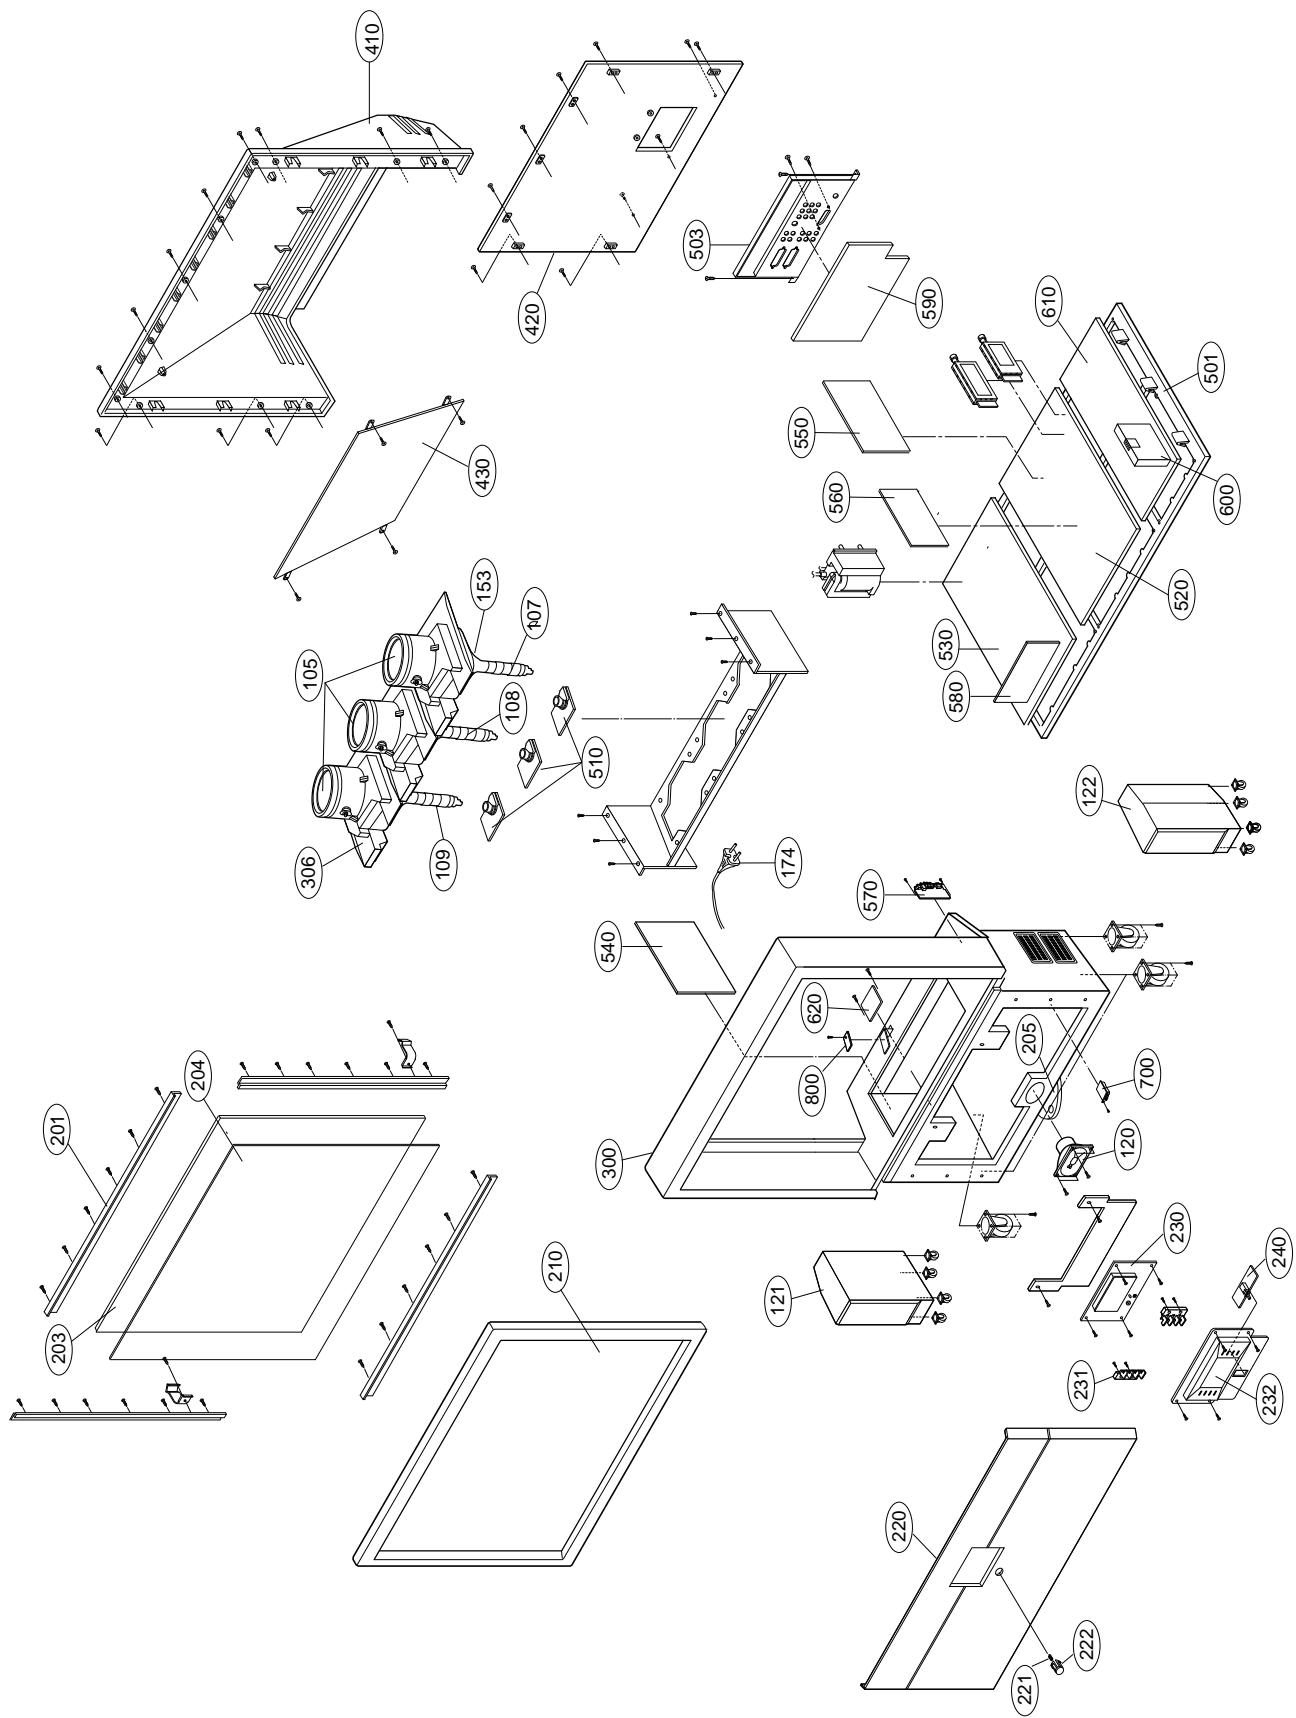

EXPLODED VIEW PARTS LIST

The components identified by mark Δ are critical for safety.
Replace only with part number specified.

No.	Part No.	Description
105	3680V00007A	LENS,SEKINOS SSM-75(50)
107	4810V00395F	BRACKET,BLUE LENS+COUPLER+CPT S/S
108	4810V00395E	BRACKET,GREEN LENS+COUPLER+CPT S/S
109	4810V00395D	BRACKET,RED LENS+COUPLER+CPT S/S
120	120-D38E	SPEAKER,MID-RANGE 8 OHM 15/25W 87DB
121	6401VD0006N	SPEAKER,FULLRANGE (L)WOOFER+TWEETER
122	6401VD0006P	SPEAKER,FULLRANGE (R)WOOFER+TWEETER
Δ 174	174-222P	POWER CORD ASSY SAA L=2200MM 219A
203	3350V00012B	SCREEN,DNP 53"KP/GAIN6.0
204	3790V00022K	WINDOW,FILTER
205	4778V00031A	LEG ASSY,CENTER
210	3090V00202A	CABINET,WOOD
220	3211V00033Q	FRAME ASSY
221	320-062J	SPRING,KNOB
222	5020V00393B	BUTTON,POWER WHITE
230	6871VSM741D	PWB ASSY,CONTROL
231	5020V00458A	BUTTON,CONTROL 4KEY
232	4810V00328G	BRACKET,CONTROL 60HR
240	6871VSM756A	PWB ASSY,PSW
300	3091V00258J	CABINET ASSY,LG.100HZ
306	4980V00132A	SUPPORTER,CRT&LENS ETC .
410	3809V00182D	BACK COVER ASSY
420	3809V00190D	BACK COVER ASSY,UPPER
430	5018V00017A	MIRROR,PLASTIC(53N)
501	4810V00221C	BRACKET,MAIN
503	4810V00327M	BRACKET,REAR A/V NO SCART
510	6871VSM998A	PWB ASSY,CPT (15A) S/S
520	6871VMM800D	PWB ASSY,MAIN (015A)
530	6871VDM120A	PWB ASSY,MAIN2
540	6871VPM069B	PWB ASSY,SMPS PT,NARROW(015A)
550	6871VSM964A	PWB ASSY,100HZ
560	6871VSM966A	PWB ASSY,MICOM
570	6871VSM761A	PWB ASSY,SIDE A/V
580	6871VSMA06A	PWB ASSY,VM
590	6871VSM994B	PWB ASSY,A/V(NO SCART)
600	6871VSM968A	PWB ASSY,NARROW,CONV(015A)
610	6871VSM969A	PWB ASSY,D-CONV
700	0IGL120104G	IC,G-LINK CDS MODULE 5 PIN BK 5V BK 16
800	6871VSM760A	PWB ASSY,PRE-AMP

REPLACEMENT PARTS LIST

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
IC					
IC001	0IAL241610B	IC,AT24C16-10PC-2.7 8PIN DIP ST E	IC891	0ILI817000G	IC,LTV817M-VB 4P,DIP BK PHOTO COU
IC001	0ISM555000A	IC,SDA5550 MQFP100 BK MICOM TXT M	IC901B	0IPH611190A	IC,TDA6111Q 9SIP RGB AMP
IC002	0ISH052100C	IC,PQ05RD21 4SIP ST REGULATOR	IC901G	0IPH611190A	IC,TDA6111Q 9SIP RGB AMP
IC003	0ISG111733B	IC,LD1117V33C 3SIP ST REGULATOR	IC901R	0IPH611190A	IC,TDA6111Q 9SIP RGB AMP
IC003	0ISS610082A	IC,K6T1008V2E-TB(F)70 [K6T1008BLT	IC2000	0ICTMSG001A	IC,STV2050A SGS-THOMSON 80PIN TQF
IC004	0ISG111725B	IC,LD1117V25 3 SIP ST REGULATOR M	IC2001	0ISA392120A	IC,STK392-120 18P,SIP BK CONVERGE
IC004	0IZZVA0027A	IC,M27W201 32PLCC ST MP-015A .	IC2002	0ISA392120A	IC,STK392-120 18P,SIP BK CONVERGE
IC005	0IFA752700A	IC,KA75270Z 3 TP RE-SET IC MC-007	IC2003	0ITI347000A	IC,LF347D 14P,SOP TP QUAD OPERATI
IC005	0IFA754207A	IC,KA75420ZTA(KA7542ZTA) 3P,TO-92	IC2004	0ITI347000A	IC,LF347D 14P,SOP TP QUAD OPERATI
IC006	0IKE780500Q	IC,KIA7805API 3P TO-220 ST REGULA	IC2005	0IAL241600B	IC,AT24C16-10PC 8D EEPROM 16K
IC007	0IMCRM002A	IC,M62320P MITSUBISHI 16DIP ST I/	IC2007	0ISG111733B	IC,LD1117V33C 3SIP ST REGULATOR
IC101	0IKE780500Q	IC,KIA7805API 3P TO-220 ST REGULA	IC2008	0IAL895224E	IC,AT89C52-24AC 44A TRAY U-CONTRO
IC102	0IKE780900H	IC,KIA78L09BP(AT) 3P 9V,150MA	IC2009	0IMI350710A	IC,M35071-002FP 20P,SOP TP OSD IC
IC201	0IMI623200B	IC,M62320FP,I/O EXPANDER 16P SOP	IC2010	0IPH741400E	IC,74HC14D 14SOP TP SHITTER TRIGG
IC201	0IKE780900M	IC,KIA7809API TO220 ST 3P 9V REGU	IC2011	0IKE744200A	IC,KIA7442P TO-92 NEGA.RESET(4.2V
IC202	0IKE780800J	IC,KIA7808API 3 ST REGULATOR .	IC2020	0IMCRAL003A	IC,AT24C164-10PC ATMEL 8PIN ST EE
IC202	0ISO206900A	IC,CXA2069Q QFP64 BK I2C BUS AV S	Q2025	0IFA270000A	IC,2N7000TA TO-92, 3P TP LEVEL SH
IC203	0ISA722200A	IC,LA7222 (1280 AUDIO)	Q2026	0IFA270000A	IC,2N7000TA TO-92, 3P TP LEVEL SH
IC204	0ISA722200A	IC,LA7222 (1280 AUDIO)	DIODE		
IC205	0IMCRMN010A	IC,MSP3452 MICRONAS 80P QFP TRAY	D001	0DS113379BA	DIODE,SWITCHING 1SS133 T-72
IC206	0IMY700000A	IC,MSGEQ7 8P DIP BK 7 BAND GRAPHI	D002	0DS113379BA	DIODE,SWITCHING 1SS133 T-72
IC207	0IKE780500P	IC,KIA78L05BP(AT) 3P 5V,150MA	D003	0DS113379BA	DIODE,SWITCHING 1SS133 T-72
IC208	0IKE780500Q	IC,KIA7805API 3P TO-220 ST REGULA	D004	0DS113379BA	DIODE,SWITCHING 1SS133 T-72
IC209	0IFA754207A	IC,KA75420ZTA(KA7542ZTA) 3P,TO-92	D005	0DS113379BA	DIODE,SWITCHING 1SS133 T-72
IC301	0ISA784600A	IC,7846 SIP,10P BK V-OUT IC	D006	0DD410009AA	DIODE,RECTIFIER SCHOTTKY,BAT 41 TP
IC401	0IKE358000A	IC,KIA358P DIP8 DUAL OP-AMP BK	D007	0DD410009AA	DIODE,RECTIFIER SCHOTTKY,BAT 41 TP
IC402	0ISS393000G	IC,KA393 COMPARATOR 8DIP BK OP AM	D008	0DD410009AA	DIODE,RECTIFIER SCHOTTKY,BAT 41 TP
IC403	0IKE781200P	IC,KIA7812API TO220 ST 3P 12V REG	D208	0DD226239AA	DIODE,SWITCHING CHIP KDS226 SOT-23
IC405	0IKE782400C	IC,KIA7824API 3 ST REGULATOR .	D302	0DD150009CE	DIODE,RECTIFIER GP15J TP (1.5A/600V) GI
IC406	0IKE455800E	IC,KIA4558 8DIP DUAL OP AMP	D401	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP
IC408	0IKE358000A	IC,KIA358P DIP8 DUAL OP-AMP BK	D402	0DD414809ED	DIODE,1N4148 TA
IC409	0IKE780500Q	IC,KIA7805API 3P TO-220 ST REGULA	D403	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP
IC410	0ISS790500C	IC,KA7905 TO-220 BK REGULATOR IC	D404	0DD414809ED	DIODE,1N4148 TA
IC501	0IIT323000D	IC,VPC3230D QA B4 80P QFP TRAY SO	D406	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP
IC501	0ISA701600A	IC,LA7016 8S ANALOG S/W	D408	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP
IC502	0IIT323000D	IC,VPC3230D QA B4 80P QFP TRAY SO	D409	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
IC502	0ISH052100C	IC,PQ05RD21 4SIP ST REGULATOR	D410	0DD200009AH	DIODE,RECTIFIER RU2AMV(1) TP SANKEN
IC503	0ISJ111733A	IC,EZ1117CST-3.3 3P,SOT-223 TP 3.	D414	0DD150009CA	DIODE,RECTIFIER RGP15J,TP(52MM),GI
IC504	0ISJ111733A	IC,EZ1117CST-3.3 3P,SOT-223 TP 3.	D415	0DD150009CA	DIODE,RECTIFIER RGP15J,TP(52MM),GI
IC601	0ISG726500A	IC,TDA7265 11P BK PWR AMP 25W,25W	D416	0DD340009EA	DIODE,RECTIFIER BYW34 TP (2A/400V)
IC602	0ISG726500A	IC,TDA7265 11P BK PWR AMP 25W,25W	D417	0DD340009EA	DIODE,RECTIFIER BYW34 TP (2A/400V)
IC702	0ISO210000A	IC,CXA2100AQ 64P QFP BK DEFLECTIO	D418	0DD340009EA	DIODE,RECTIFIER BYW34 TP (2A/400V)
IC703	0IKE780900M	IC,KIA7809API TO220 ST 3P 9V REGU	D419	0DD200009AH	DIODE,RECTIFIER RU2AMV(1) TP SANKEN
IC704	0IMO741570H	IC,SN74LS157D 16P,SOP TP QUAD 2IN	D420	0DD200009AH	DIODE,RECTIFIER RU2AMV(1) TP SANKEN
IC705	0ISJ111733A	IC,EZ1117CST-3.3 3P,SOT-223 TP 3.	D424	0DD100009AQ	DIODE,RP1HV(1) TP SANKEN TP SANKEN
IC706	0ISM941000A	IC,SDA9410 100QFP BK SCAN CONVERT	D426	0DD410000AC	DIODE,RECTIFIER RU4DS,LF-L1 SANKEN
IC707	0ISJ111733A	IC,EZ1117CST-3.3 3P,SOT-223 TP 3.	D427	0DR360000AA	DIODE,RECTIFIER FMG-36S BK SANKEN -
ICP802	0IKE780500Q	IC,KIA7805API 3P TO-220 ST REGULA	D428	0DR500000AA	DIODE,RECTIFIER FMQ-G5FMS BK SANKEN
IC801	0ISK665813A	IC,STR-F6658B(LF1352) 5PIN SIP BK	D430	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM
IC871	0ISK115000A	IC,SE115N(LF12) 3P 115V ERROR AMP	D432	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
IC887	0ILI817000G	IC,LTV817M-VB 4P,DIP BK PHOTO COU	D433	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM
			D434	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
D435	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	D931	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D437	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	D932	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D600	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	D933	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D601	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	D950	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D602	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	D951	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D603	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	D952	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D605	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	D953	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D606	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	D970	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D701	0DD184009AA	DIODE,SWITCHING KDS184S CHIP 85V 300MA	D971	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D702	0DD226239AA	DIODE,SWITCHING CHIP KDS226 SOT-23	D972	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D703	0DD226239AA	DIODE,SWITCHING CHIP KDS226 SOT-23	D973	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D704	0DD184009AA	DIODE,SWITCHING KDS184S CHIP 85V 300MA	D2002	0DD184009AA	DIODE,SWITCHING KDS184S 85V 300MA
D705	0DD226239AA	DIODE,SWITCHING CHIP KDS226 SOT-23	DL701	0DL100000AE	LED SA5711(DL-1LO) BK AMBER -
D706	0DD184009AA	DIODE,SWITCHING KDS184S CHIP 85V 300MA	DP801	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D707	0DD184009AA	DIODE,SWITCHING KDS184S CHIP 85V 300MA	DP802	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D708	0DD184009AA	DIODE,SWITCHING KDS184S CHIP 85V 300MA	DP803	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D805	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	DP804	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I
D806	0DD100009AM	DIODE,RECTIFIER EU1ZV(1) TP SANKEN	DP812	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM
D807	0DD100009AM	DIODE,RECTIFIER EU1ZV(1) TP SANKEN	ZD004	0DZ110009AD	DIODE,ZENER MTZJ11B TP ROHM-K DO34
D808	0DD100009AM	DIODE,RECTIFIER EU1ZV(1) TP SANKEN	ZD101	0DZ330009BA	DIODE,ZENER HZT33(TP) HITACHI
D815	0DD606000AA	DIODE,RECTIFIER RBV606,SANKEN	ZD102	0DZ330009BA	DIODE,ZENER HZT33(TP) HITACHI
D831	0DD420000BB	DIODE,D4L20U SHINDENGEN	ZD300	0DZ240009CG	DIODE,ZENER MTZJ24B TP ROHM-K DO34
D832	0DD420000BB	DIODE,D4L20U SHINDENGEN	ZD301	0DZ560009CF	DIODE,ZENER MTZJ5.6B TP ROHM-K DO3
D834	0DD300009AC	DIODE,RECTIFIER RU3AMV(1) TP SANKEN	ZD302	0DZ240009CG	DIODE,ZENER MTZJ24B TP ROHM-K DO34 - 24V 5
D861	0DD200009AH	DIODE,RECTIFIER RU2AMV(1) TP SANKEN	ZD303	0DZ240009CG	DIODE,ZENER MTZJ24B TP ROHM-K DO34 - 24V 5
D871	0DR360000CA	DIODE,RECTIFIER FML-36S TO3P 600V 20	ZD401	0DZ910009AJ	DIODE,ZENER MTZJ9.1B TP ROHM-K DO34 0.5W 9
D888	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD402	0DZ240009DC	DIODE,ZENER MTZJ2.4B TP ROHM-K DO34 0.5W 2
D890	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD404	0DZ510009DB	DIODE,ZENER MTZJ5.1B TP ROHM-K DO34 - 5.1
D891	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD405	0DZ510009DB	DIODE,ZENER MTZJ5.1B TP ROHM-K DO34 - 5.1
D892	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD406	0DZ510009DB	DIODE,ZENER MTZJ5.1B TP ROHM-K DO34 - 5.1
D893	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD407	0DZ820009AH	DIODE,ZENER MTZJ8.2B TP ROHM-K DO34 - 8.2V
D894	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD410	0DZ560009CF	DIODE,ZENER MTZJ5.6B TP ROHM-K DO34 0.5W
D895	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD411	0DZ130009CJ	DIODE,ZENER MTZJ13B TP ROHM-K DO34 0.5W
D896	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD412	0DZ130009CJ	DIODE,ZENER MTZJ13B TP ROHM-K DO34 0.5W
D897	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD413	0DZ300009BB	DIODE,ZENER MTZJ30B TP ROHM-K DO34 0.5W
D898	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD415	0DZ360009BC	DIODE,ZENER MTZJ3.6B TP ROHM-K DO34 0.5W
D899	0DS113379BA	DIODE,SWITCHING 1SS133 T-72 TP ROHM	ZD501	0DZ120009AF	DIODE,ZENER MTZJ12B TP ROHM-K DO34 - 12V
D901B	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD601	0DZ510009AB	DIODE,ZENER MTZ5.1B TP ROHM-K - - - -
D901G	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD602	0DZ510009AB	DIODE,ZENER MTZ5.1B TP ROHM-K - - - -
D901R	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD801	0DZ150009AD	DIODE,ZENER MTZJ15B TP ROHM-K DO34 500MW
D901	0DD226239AA	DIODE,SWITCHING CHIP KDS226 SOT-23	ZD892	0DZ510009AB	DIODE,ZENER MTZ5.1B TP ROHM-K - - - -
D902B	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD901B	0DZ560009CF	DIODE,ZENER MTZJ5.6B TP ROHM-K DO34 0.5W
D902G	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD901R	0DZ560009CF	DIODE,ZENER MTZJ5.6B TP ROHM-K DO34 0.5W
D902R	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD901G	0DZ560009CF	DIODE,ZENER MTZJ5.6B TP ROHM-K DO34 0.5W
D903B	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD902B	0DZ110009AD	DIODE,ZENER MTZJ11B TP ROHM-K DO34 - 11V
D903G	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD902G	0DZ110009AD	DIODE,ZENER MTZJ11B TP ROHM-K DO34 - 11V
D903R	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD902R	0DZ110009AD	DIODE,ZENER MTZJ11B TP ROHM-K DO34 - 11V
D904	0DD226239AA	DIODE,SWITCHING CHIP KDS226 SOT-23	ZD1001	0DZ620009BB	DIODE,ZENER MTZJ6.2B TP ROHM-K DO34 0.5W
D907	0DD226239AA	DIODE,SWITCHING CHIP KDS226 SOT-23	ZD1002	0DZ620009BB	DIODE,ZENER MTZJ6.2B TP ROHM-K DO34 0.5W
D908	0DD226239AA	DIODE,SWITCHING CHIP KDS226 SOT-23	ZD1003	0DZ620009BB	DIODE,ZENER MTZJ6.2B TP ROHM-K DO34 0.5W
D910	0DD226239AA	DIODE,SWITCHING CHIP KDS226 SOT-23	ZD1004	0DZ620009BB	DIODE,ZENER MTZJ6.2B TP ROHM-K DO34 0.5W
D930	0DD060009AC	DIODE,TVR06J 0.6A/600V 250NS TP G.I	ZD1005	0DZ620009BB	DIODE,ZENER MTZJ6.2B TP ROHM-K DO34 0.5W

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
ZD1006	0DZ620009BB	DIODE,ZENER MTZJ6.2B TP ROHM-K DO34 0.5W	Q214	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
ZD1007	0DZ620009BB	DIODE,ZENER MTZJ6.2B TP ROHM-K DO34 0.5W	Q215	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
ZD1008	0DZ620009BB	DIODE,ZENER MTZJ6.2B TP ROHM-K DO34 0.5W	Q216	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
ZD2610	0DZRM00178A	DIODE,ZENER UDZS TE-17 5.1B	Q217	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
ZD2611	0DZRM00178A	DIODE,ZENER UDZS TE-17 5.1B	Q218	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
ZD2612	0DZRM00178A	DIODE,ZENER UDZS TE-17 5.1B	Q219	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
ZD2804	0DZRM00178A	DIODE,ZENER UDZS TE-17 5.1B	Q220	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
ZD2805	0DZ240009DC	DIODE,ZENER MTZJ2.4B DO34 0.5W	Q221	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
TRANSISTOR			Q222	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q001	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q223	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q001	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q301	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q002	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q304	0TR205900AB	TR,KTD2059-Y TO-220IS KEC
Q002	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q433	0TFHT00001A	TR,HITACHI 2SK3160 BK TO-220FM 20
Q003	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q402	0TFIR10003A	TR,INTERNATIONAL RECTIFIER IRFBC2
Q003	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q403	0TR544600AA	TR,2SC5446(AS) BK TOSHIBA TO3P 17
Q004	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q405	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC
Q004	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q406	0TR471000AA	TR,2SC4710 SANYO OTOROLA IBA
Q005	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q407	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC
Q006	0TR150400BA	TR,CHIP 2SA1504S(ASY) KEC	Q408	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q006	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q409	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q007	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC	Q410	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC
Q016	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q413	0TFIR10003A	TR,INTERNATIONAL RECTIFIER IRFBC2
Q017	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q416	0TR188700AA	TR,2SD1887 TO-3PML SANYO
Q018	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q417	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q019	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q419	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q020	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q420	0TR421009CB	TR,BF421L(AMMO)TO-92 TP PHILIPS
Q021	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q421	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC
Q022	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q422	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q023	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q423	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q024	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q424	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC
Q025	0TR830009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL	Q426	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q026	0TR150400BA	TR,CHIP 2SA1504S(ASY) KEC	Q427	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q101	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC	Q428	0TR322709AA	TR,KTC3227-Y,TP(KTC1627A),KEC
Q102	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q429	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q103	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q432	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC
Q104	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC	Q501	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q107	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC	Q502	0TR150400BA	TR,CHIP 2SA1504S(ASY) KEC
Q108	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q502	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q110	0TR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC	Q503	0TR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q201	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q503	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q202	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q504	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q203	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q505	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q204	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q506	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q205	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q507	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q206	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q508	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q208	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q509	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q209	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q510	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q210	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q511	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q211	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q512	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q212	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q513	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q213	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q514	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC
			Q515	0TR387500AA	TR,CHIP 2SC3875S(ALY) KEC

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
Q516	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2003	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q600	OTR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC	Q2004	OTR150400BA	TR,CHIP 2SA1504S(ASY) KEC
Q601	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q2005	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q602	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q2007	OTR380009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL
Q603	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q2008	OTR380009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL
Q604	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q2009	OTR380009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL
Q712	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2013	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q713	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2014	OTR150400BA	TR,CHIP 2SA1504S(ASY) KEC
Q714	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2015	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q715	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2016	OTR150400BA	TR,CHIP 2SA1504S(ASY) KEC
Q716	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2020	OTR380009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL
Q717	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2021	OTR380009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL
Q718	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2022	OTR380009BA	TR,BSS83 TP PHILIPS NON N-CHANNEL
Q719	OTR150400BA	TR,CHIP 2SA1504S(ASY) KEC	Q2023	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q720	OTR150400BA	TR,CHIP 2SA1504S(ASY) KEC	Q2024	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q721	OTR150400BA	TR,CHIP 2SA1504S(ASY) KEC	Q2050	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q722	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2201	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q723	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2202	OTR150400BA	TR,CHIP 2SA1504S(ASY) KEC
Q771	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2203	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q801	OTR385200AA	TR,2SC3852A SANKEN	Q2204	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q891	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	Q2205	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q901B	OTR223800AA	TR,KTC2238A-Y	Q2206	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q901R	OTR223800AA	TR,KTC2238A-Y	Q2207	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q901G	OTR223800AA	TR,KTC2238A-Y	Q2208	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q901	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	Q2209	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC
Q902	OTR150400BA	TR,CHIP 2SA1504S(ASY) KEC	QP810	OTR322709AA	TR,KTC3227-Y,TP(KTC1627A),KEC
Q902B	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	QP811	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815
Q902G	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	CAPACITOR		
Q902R	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	C001	0CE107DK618	100UF STD 50V M FL TP5
Q903	OTR322709AA	TR,KTC3227-Y,TP(KTC1627A),KEC	C01P	0CN1030F679	10000P 16V M Y TA52
Q904	OTR322709AA	TR,KTC3227-Y,TP(KTC1627A),KEC	C02P	0CE476DD618	47UF STD 10V 20% FL TP 5
Q905G	OTR126609AA	TR,KTA1266-TP-Y (KTA1015) KEC	C002	0CN1030F679	10000P 16V M Y TA52
Q905	OTR127409AB	TR,KTA1274-Y TO-92L TP KEC	C003	0CE476DD618	47UF STD 10V 20% FL TP 5
Q906	OTR322709AA	TR,KTC3227-Y,TP(KTC1627A),KEC	C004	0CN1030F679	10000P 16V M Y TA52
Q907	OTR322709AA	TR,KTC3227-Y,TP(KTC1627A),KEC	C005	0CE227DF618	220UF STD 16V M FL TP5
Q908	OTR127409AB	TR,KTA1274-Y TO-92L TP KEC	C006	0CE477DD618	470UF STD 10V M FL TP5
Q930	OTR322709AA	TR,KTC3227-Y,TP(KTC1627A),KEC	C007	0CE477DD618	470UF STD 10V M FL TP5
Q931	OTR127409AB	TR,KTA1274-Y TO-92L TP KEC	C008	0CE477DD618	470UF STD 10V M FL TP5
Q933	OTR153500AA	TR,2SA1535A BK PANASONIC TO220 -1	C009	0CE227DF618	220UF STD 16V M FL TP5
Q940	OTR394400AA	TR,2SC3944A BK PANASONIC TO220 18	C010	0CE476DD618	47UF STD 10V 20% FL TP 5
Q950	OTR127409AB	TR,KTA1274-Y TO-92L TP KEC	C011	0CE476DD618	47UF STD 10V 20% FL TP 5
Q951	OTR322709AA	TR,KTC3227-Y,TP(KTC1627A),KEC	C011	0CN1040K949	0.1M 50V Z F TA52
Q952	OTR153500AA	TR,2SA1535A BK PANASONIC TO220 -1	C012	0CE107DD618	100UF STD 10V M FL TP5
Q953	OTR394400AA	TR,2SC3944A BK PANASONIC TO220 18	C013	0CE227DD618	220UF STD 10V M FL TP5
Q970	OTR127409AB	TR,KTA1274-Y TO-92L TP KEC	C013	0CQ1531N509	0.015U 100V K POLY TP
Q971	OTR322709AA	TR,KTC3227-Y,TP(KTC1627A),KEC	C014	0CE227DD618	220UF STD 10V M FL TP5
Q972	OTR394400AA	TR,2SC3944A BK PANASONIC TO220 18	C015	0CE107DK618	100UF STD 50V M FL TP5
Q973	OTR153500AA	TR,2SA1535A BK PANASONIC TO220 -1	C016	0CE106DN618	10UF STD 100V M FL TP5
Q2001	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815	C017	0CE476DK618	47UF STD 50V M FL TP5
Q2001	OTR387500AA	TR,CHIP 2SC3875S(ALY) KEC	C018	0CE476DD618	47UF STD 10V 20% FL TP 5
Q2002	OTR150400BA	TR,CHIP 2SA1504S(ASY) KEC	C018	0CN1030F679	10000P 16V M Y TA52
Q2002	OTR319809AA	TR,KTC3198 TP KEC ---Y (KTC1815			

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
C019	0CN1040K949	0.1M 50V Z F TA52	C201	0CN1030F679	10000P 16V M Y TA52
C020	0CE477DD618	470UF STD 10V M FL TP5	C202	0CE108DF618	1000UF STD 16V M FL TP5
C021	0CN1040K949	0.1M 50V Z F TA52	C203	0CE227DF618	2200UF STD 16V M FL TP5
C022	0CE477DD618	470UF STD 10V M FL TP5	C205	0CE227DF618	2200UF STD 16V M FL TP5
C023	0CE477DD618	470UF STD 10V M FL TP5	C206	0CE108DF618	1000UF STD 16V M FL TP5
C024	0CE477DD618	470UF STD 10V M FL TP5	C207	0CE477DF618	470UF STD 16V 20% FL TP 5
C030	0CE106DF618	10UF STD 16V M FL TP5	C212	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C031	0CN1030F679	10000P 16V M Y TA52	C213	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C032	0CE476DD618	47UF STD 10V 20% FL TP 5	C214	0CE477DF618	470UF STD 16V 20% FL TP 5
C034	0CE476DD618	47UF STD 10V 20% FL TP 5	C216	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C035	0CE476DD618	47UF STD 10V 20% FL TP 5	C217	0CE227DF618	2200UF STD 16V M FL TP5
C036	0CE476DD618	47UF STD 10V 20% FL TP 5	C219	0CE477DF618	470UF STD 16V 20% FL TP 5
C039	0CE107DD618	100UF STD 10V M FL TP5	C220	0CE227DF618	2200UF STD 16V M FL TP5
C040	0CE107DD618	100UF STD 10V M FL TP5	C226	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C043	0CE476DD618	47UF STD 10V 20% FL TP 5	C229	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C044	0CE107DD618	100UF STD 10V M FL TP5	C243	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C045	0CE107DD618	100UF STD 10V M FL TP5	C251	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C046	0CE107DD618	100UF STD 10V M FL TP5	C270	0CE107SF6DC	1000UF MVG 16V M SMD R/TP
C047	0CE107DD618	100UF STD 10V M FL TP5	C272	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C051	0CN1030F679	10000P 16V M Y TA52	C273	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C101	0CN1030F679	10000P 16V M Y TA52	C274	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C104	0CE106DK618	10UF STD 50V M FL TP5	C276	0CE107SF6DC	1000UF MVG 16V M SMD R/TP
C105	0CN1030F679	10000P 16V M Y TA52	C277	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C107	0CE476DF618	47UF STD 16V M FL TP5	C279	0CE107SF6DC	1000UF MVG 16V M SMD R/TP
C108	0CN1030F679	10000P 16V M Y TA52	C282	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C109	0CN1010K519	100P 50V K B TA52	C283	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C110	0CN1030F679	10000P 16V M Y TA52	C284	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C111	0CE476DF618	47UF STD 16V M FL TP5	C285	0CE227DF618	2200UF STD 16V M FL TP5
C112	0CN1040K949	0.1M 50V Z F TA52	C290	0CE335SK6DC	3.3UF MVG 50V 20% SMD R/TP
C115	0CK1030K945	0.01UF 50V Z F TR	C301	0CQ3341N401	0.33U 100V J POLY F5
C116	0CE477DD618	470UF STD 10V M FL TP5	C302	0CE107DK618	1000UF STD 50V M FL TP5
C118	0CX4700K409	47P 50V J SL TA52	C303	0CE108DH618	1000UF STD 25V M FL TP5
C119	0CX4700K409	47P 50V J SL TA52	C304	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C121	0CN1030F679	10000P 16V M Y TA52	C304	0CE108DH618	1000UF STD 25V M FL TP5
C122	0CE475DK618	4.7UF STD 50V 20% FL TP 5	C305	0CN1030F679	10000P 16V M Y TA52
C124	0CN1040K949	0.1M 50V Z F TA52	C306	0CN1020K519	1000P 50V K B TA52
C125	0CE476DF618	47UF STD 16V M FL TP5	C306	181-007G	MPE ECQ-V1H334JL3(TR), 50V 0.3
C126	0CN1040K949	0.1M 50V Z F TA52	C307	0CE475DK618	4.7UF STD 50V 20% FL TP 5
C127	0CE108DD618	1000UF STD 10V M FL TP5	C308	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C130	0CE477DD618	470UF STD 10V M FL TP5	C315	0CQ1042K439	0.1UF S 50V 5% M/PE NI TP5
C131	0CN1030F679	10000P 16V M Y TA52	C319	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C132	0CX4700K409	47P 50V J SL TA52	C322	0CE335SK6DC	3.3UF MVG 50V 20% SMD R/TP
C133	0CX4700K409	47P 50V J SL TA52	C324	0CE107SF6DC	100UF MVG 16V M SMD R/TP
C134	0CN1040K949	0.1M 50V Z F TA52	C327	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C136	0CE475DK618	4.7UF STD 50V 20% FL TP 5	C333	0CE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD
C137	0CN1030F679	10000P 16V M Y TA52	C334	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C138	0CE476DF618	47UF STD 16V M FL TP5	C337	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C139	0CN1030F679	10000P 16V M Y TA52	C339	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C140	0CK1030K945	0.01UF 50V Z F TR	C340	0CE105SK6DC	1UF MVG 50V M SMD R/TP
C141	0CE106DK618	10UF STD 50V M FL TP5	C344	0CQ1041N509	0.1U 100V K POLY TP
C144	0CE1074F618	100UF SRA 16V M FL TP5	C346	0CE476SF6DC	47UF MVG 16V M SMD R/TP
C145	0CE477DF618	470UF STD 16V 20% FL TP 5	C348	0CE105SK6DC	1UF MVG 50V M SMD R/TP

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic	RD : Carbon Film
	CQ : Polyester	RS : Metal Oxide Film
	CE : Electrolytic	RN : Metal Film

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
C349	OCE105SK6DC	1UF MVG 50V M SMD R/TP	C457	0CN1040K949	0.1M 50V Z F TA52
C350	OCE105SK6DC	1UF MVG 50V M SMD R/TP	C460	0CE107DK618	1000UF STD 50V M FL TP5
C351	OCE105SK6DC	1UF MVG 50V M SMD R/TP	C461	0CK47202510	4700P 2KV K B S
C352	OCE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD	C462	0CE226CR618	22UF SHL,SD 250V M FL TP5
C354	OCE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD	C463	181-014Y	MPP 1.6KV 0.0015UF J
C356	OCE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD	C464	181-015F	MPP 1600V 0.0073UF H
C358	OCE107SF6DC	100UF MVG 16V M SMD R/TP	C466	0CE227DK618	220UF STD 50V M FL TP5
C360	OCE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD	C467	0CE227DK618	220UF STD 50V M FL TP5
C361	OCE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD	C468	181-009V	PP 200V 0.047UF K
C362	OCE106SF6DC	10UF MVG 16V 20% R/TP(SMD) SMD	C469	0CQ3931N509	0.0390UF 100V K PE TP
C366	OCE107SF6DC	100UF MVG 16V M SMD R/TP	C470	0CK2210W515	220P 500V K B TS
C401	OCE5651K652	5.6UF SM,SA 50V 20% FM7.5 BP(S	C471	0CK1810W515	180P 500V K B TS
C402	OCE5651K652	5.6UF SM,SA 50V 20% FM7.5 BP(S	C474	0CE106DK618	10UF STD 50V M FL TP5
C403	0CK47101515	470P 1KV K B TS	C475	181-014N	MPP 1600V 0.01UF J
C405	OCE475BP618	4.7UF KME TYPE 160V 20% FL TP	C476	181-015J	MPP 1600V 0.0086UF H
C406	181-013T	MPP 400V 0.70UF J	C478	0CE475BP618	4.7UF KME TYPE 160V 20% FL TP
C407	181-010W	PP 800V 0.0047UF J	C479	0CE227DK618	220UF STD 50V M FL TP5
C409	181-009R	PP 200V 0.022UF K	C481	0CN6810K519	680P 50V K B TA52
C411	0CQ4721N509	0.0047U 100V K POLY TP	C482	0CE106DK618	10UF STD 50V M FL TP5
C412	OCE107DK618	100UF STD 50V M FL TP5	C484	0CE107DK618	100UF STD 50V M FL TP5
C413	OCE477DF618	470UF STD 16V 20% FL TP 5	C486	0CN1040K949	0.1M 50V Z F TA52
C414	OCE477DF618	470UF STD 16V 20% FL TP 5	C487	0CN1040K949	0.1M 50V Z F TA52
C415	181-091G	DEHR33D471KN3A 470PF 2KV 10%,-	C488	0CN1030F679	10000P 16V M Y TA52
C416	OCE475DK618	4.7UF STD 50V 20% FL TP 5	C490	0CE226DF618	22UF STD 16V M FL TP5
C417	OCE106DR618	10UF STD 250V M FL TP5	C491	0CN1040K949	0.1M 50V Z F TA52
C418	OCE477DH618	470UF STD 25V M FL TP5	C492	0CN1040K949	0.1M 50V Z F TA52
C419	OCE337DF618	330UF STD 16V M FL TP5	C501	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C421	OCE475DK618	4.7UF STD 50V 20% FL TP 5	C502	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C422	OCE227BP650	220UF KME TYPE 160V 20% FM7.5	C503	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C423	OCE107DK618	100UF STD 50V M FL TP5	C503	0CN1030F679	10000P 16V M Y TA52
C424	0CK2210W515	220P 500V K B TS	C504	0CE477DF618	470UF STD 16V 20% FL TP 5
C425	OCE475BR618	4.7UF KME TYPE 250V 20% FL TP	C504	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C426	0CN1040K949	0.1M 50V Z F TA52	C505	0CE1074F618	100UF SRA 16V M FL TP5
C427	0CN1030F679	10000P 16V M Y TA52	C506	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C428	181-001B	CE 200V 470UF M LUG (105)	C506	0CN1030F679	10000P 16V M Y TA52
C430	0CK47101515	470P 1KV K B TS	C507	0CE475DK618	4.7UF STD 50V 20% FL TP 5
C432	OCE477DF618	470UF STD 16V 20% FL TP 5	C507	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R
C434	OCE227BP650	220UF KME TYPE 160V 20% FM7.5	C508	0CN1030F679	10000P 16V M Y TA52
C436	181-015L	MPP 1600V 0.0095UF H	C509	0CE475DK618	4.7UF STD 50V 20% FL TP 5
C437	0CN6810K519	680P 50V K B TA52	C512	0CN1030F679	10000P 16V M Y TA52
C440	0CK5610W515	560P 500V K B TS	C513	0CN1010K519	100P 50V K B TA52
C441	OCE476DK618	47UF STD 50V M FL TP5	C514	0CN1010K519	100P 50V K B TA52
C443	0CC1010K415	100P 50V J NPO TS	C515	0CN1010K519	100P 50V K B TA52
C444	0CQ3321N509	0.0033U 100V K POLY TP	C518	0CN1010K519	100P 50V K B TA52
C446	OCE476DK618	47UF STD 50V M FL TP5	C519	0CE106DF618	10UF STD 16V M FL TP5
C447	0CN1040K949	0.1M 50V Z F TA52	C519	0CN1010K519	100P 50V K B TA52
C448	0CN1030F679	10000P 16V M Y TA52	C520	0CN1010K519	100P 50V K B TA52
C449	OCE105DK618	1UF STD 50V M FL TP5	C521	0CE108DF618	1000UF STD 16V M FL TP5
C450	0CN1040K949	0.1M 50V Z F TA52	C522	0CE108DF618	1000UF STD 16V M FL TP5
C451	0CQ1021N509	0.001U 100V K POLY TP	C523	0CE106DF618	10UF STD 16V M FL TP5
C452	OCE105DK618	1UF STD 50V M FL TP5	C523	0CE108DF618	1000UF STD 16V M FL TP5
C454	OCE1074F618	100UF SRA 16V M FL TP5	C525	0CE225DK618	2.2UF STD 50V 20% FL TP 5

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
C528	0CE107DD618	100UF STD 10V M FL TP5	C630	0CE477DF618	470UF STD 16V 20% FL TP 5
C528	0CE107DD618	100UF STD 10V M FL TP5	C635	0CE108DK61A	1000UF STD 50V M FL TP7.5
C529	0CE107DD618	100UF STD 10V M FL TP5	C636	0CE108DK61A	1000UF STD 50V M FL TP7.5
C532	0CE106DF618	10UF STD 16V M FL TP5	C637	0CE108DK61A	1000UF STD 50V M FL TP7.5
C535	0CE107DD618	100UF STD 10V M FL TP5	C638	0CE108DK61A	1000UF STD 50V M FL TP7.5
C544	0CE107DD618	100UF STD 10V M FL TP5	C639	0CE108DK61A	1000UF STD 50V M FL TP7.5
C547	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R	C640	0CQ1041N509	0.1U 100V K POLY TP
C548	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R	C713	0CE227DD618	220UF STD 10V M FL TP5
C549	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R	C714	0CQ1041N509	0.1U 100V K POLY TP
C550	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R	C715	0CQ1041N509	0.1U 100V K POLY TP
C552	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R	C716	0CE106DF618	10UF STD 16V M FL TP5
C555	0CK224DF56A	220000PF 2012 16V 10% R/TP X7R	C720	0CE476DF618	47UF STD 16V M FL TP5
C565	0CE106DF618	10UF STD 16V M FL TP5	C724	0CQ1031N509	0.01U 100V K POLY TP
C569	0CE106DF618	10UF STD 16V M FL TP5	C725	0CQ1041N509	0.1U 100V K POLY TP
C571	0CE107DD618	100UF STD 10V M FL TP5	C729	0CE106DK618	10UF STD 50V M FL TP5
C574	0CE107DD618	100UF STD 10V M FL TP5	C730	0CE474DK618	0.4700UF STD 50V M FL TP5
C578	0CE106DF618	10UF STD 16V M FL TP5	C741	0CE476DF618	47UF STD 16V M FL TP5
C581	0CE106DF618	10UF STD 16V M FL TP5	C746	0CE476DF618	47UF STD 16V M FL TP5
C592	0CE107DD618	100UF STD 10V M FL TP5	C749	0CE475DK618	4.7UF STD 50V 20% FL TP 5
C595	0CE107DD618	100UF STD 10V M FL TP5	C753	0CE476DF618	47UF STD 16V M FL TP5
C600	0CE107DD618	100UF STD 10V M FL TP5	C767	0CE107DF618	100UF STD 16V M FL TP5
C600	0CQ6821N509	0.0068U 100V K POLY TP	C783	0CE107DD618	100UF STD 10V M FL TP5
C601	0CQ6821N509	0.0068U 100V K POLY TP	C786	0CE107DF618	100UF STD 16V M FL TP5
C602	0CE105CK636	1UF SHL,SD 50V M FM5 BP(D) TP	C789	0CE227DF618	220UF STD 16V M FL TP5
C602	0CQ6821N509	0.0068U 100V K POLY TP	C792	0CE107DD618	100UF STD 10V M FL TP5
C603	0CQ6821N509	0.0068U 100V K POLY TP	C793	0CE107DD618	100UF STD 10V M FL TP5
C604	0CQ1041N509	0.1U 100V K POLY TP	C795	0CE227DD618	220UF STD 10V M FL TP5
C605	0CQ1041N509	0.1U 100V K POLY TP	C796	0CE107DD618	100UF STD 10V M FL TP5
C606	0CQ1041N509	0.1U 100V K POLY TP	C801	0CQZVBK002D	A.C 275V 0.47UF K (S=22.5)
C607	0CE107DD618	100UF STD 10V M FL TP5	C802	0CQZVBK002C	A.C 275V 0.22UF K (S=22.5)
C607	0CQ1041N509	0.1U 100V K POLY TP	C803	181-091R	R 1000PF 1KV 10%, -10% R/TP TP5
C608	0CQ1041N509	0.1U 100V K POLY TP	C805	181-001T	CE 400V 470UF M LUG(85)
C609	0CQ1041N509	0.1U 100V K POLY TP	C807	0CK10202510	1000P 2KV K B S
C610	0CE106DF618	10UF STD 16V M FL TP5	C808	0CK10202510	1000P 2KV K B S
C610	0CQ1041N509	0.1U 100V K POLY TP	C811	0CE106DN618	10UF STD 100V M FL TP5
C612	0CE107DD618	100UF STD 10V M FL TP5	C812	0CE107DJ618	100UF STD 35V M FL TP5
C614	0CE107DD618	100UF STD 10V M FL TP5	C812	0CE227DF618	220UF STD 16V M FL TP5
C615	0CE106DK618	10UF STD 50V M FL TP5	C814	181-011D	PP 1600V 0.0022UF J
C615	0CE107DD618	100UF STD 10V M FL TP5	C816	0CK27101515	270P 1KV K B TS
C616	0CE106DK618	10UF STD 50V M FL TP5	C817	0CK8210K515	820P 50V K B TS
C617	0CE106DF618	10UF STD 16V M FL TP5	C818	0CK1020K515	1000P 50V K B TS
C617	0CE106DK618	10UF STD 50V M FL TP5	C824	0CE107DD618	100UF STD 10V M FL TP5
C618	0CE106DF618	10UF STD 16V M FL TP5	C830	0CK10202510	1000P 2KV K B S
C618	0CE106DK618	10UF STD 50V M FL TP5	C833	0CE2286J650	2200UF SMS,SG 35V 20% FM7.5 BU
C619	0CE106DF618	10UF STD 16V M FL TP5	C834	0CE228BK650	2200UF KME TYPE 50V 20% FM7.5
C619	0CE475DK618	4.7UF STD 50V 20% FL TP 5	C835	0CE108BJ618	1000UF KME 35V M FL TP5
C620	0CE475DK618	4.7UF STD 50V 20% FL TP 5	C836	0CE108BJ618	1000UF KME 35V M FL TP5
C621	0CE106DF618	10UF STD 16V M FL TP5	C837	0CE108BJ618	1000UF KME 35V M FL TP5
C626	0CE107DD618	100UF STD 10V M FL TP5	C838	0CE108BJ618	1000UF KME 35V M FL TP5
C628	0CE476DJ618	47UF STD 35V M FL TP5	C839	0CE477BH618	470UF KME TYPE 25V 20% FL TP 5
C629	0CE107DD618	100UF STD 10V M FL TP5	C840	0CE337DK618	330UF STD 50V M FL TP5
C629	0CE476DJ618	47UF STD 35V M FL TP5	C841	0CK47101515	470P 1KV K B TS

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
C842	0CE3386H610	3300UF SMS,SG 25V 20% FL BULK	C909B	0CK22202515	2200PF 2KV K B TR
C843	0CE108DF618	1000UF STD 16V M FL TP5	C910B	0CN1040K949	0.1M 50V Z F TA52
C846	0CE108BJ618	1000UF KME 35V M FL TP5	C910R	0CN1040K949	0.1M 50V Z F TA52
C848	0CE108DF618	1000UF STD 16V M FL TP5	C910G	0CN1040K949	0.1M 50V Z F TA52
C852	0CE228BK650	2200UF KME TYPE 50V 20% FM7.5	C911B	0CQZVBK002A	A.C 275V 0.1UF M (S=15)
C854	0CE228BK650	2200UF KME TYPE 50V 20% FM7.5	C911G	0CQZVBK002A	A.C 275V 0.1UF M (S=15)
C862	0CE337DK618	330UF STD 50V M FL TP5	C911R	0CQZVBK002A	A.C 275V 0.1UF M (S=15)
C863	0CE476BK618	47UF KME 50V M FL TP5	C912B	0CK1030W510	0.01U 500V K B S
C871	181-091Z	R 820PF 2KV 10%, -10% R/TP TP7.	C912R	0CK1030W510	0.01U 500V K B S
C872	181-001A	CE 200V 470UF M LUG (85)	C912G	0CK1030W510	0.01U 500V K B S
C873	0CE107BP61A	100UF KME 160V M FL TP7.5	C917G	0CN4710K519	470P 50V K B TA52
C874	0CE2251P618	2.2UF SM,SA 160V 20% FL TP 5	C931	0CE337DK618	330UF STD 50V M FL TP5
C875	0CQ1041N509	0.1U 100V K POLY TP	C932	0CE106BR618	10UF KME 250V M FL TP5
C876	0CK27102515	270P 2KV K B TS	C933	0CE106BK618	10UF KME 50V M FL TP5
C892	0CE105DK618	1UF STD 50V M FL TP5	C934	0CE106BK618	10UF KME 50V M FL TP5
C897	0CE225CK636	2.2UF SHL,SD 50V 20% FM5 BP(D)	C935	0CE106BK618	10UF KME 50V M FL TP5
C898	0CE225CK636	2.2UF SHL,SD 50V 20% FM5 BP(D)	C936	0CE107BP61A	1000UF KME 160V M FL TP7.5
C901	0CE106BK618	10UF KME 50V M FL TP5	C937	0CE107DN618	1000UF STD 100V M FL TP5
C901B	0CE107DF618	100UF STD 16V M FL TP5	C938	0CQ1031N509	0.01U 100V K POLY TP
C901G	0CE107DF618	100UF STD 16V M FL TP5	C941	0CK4720W510	4700P 500V K B S
C901R	0CE107DF618	100UF STD 16V M FL TP5	C952	0CE106BR618	10UF KME 250V M FL TP5
C902B	0CE475DK618	4.7UF STD 50V 20% FL TP 5	C953	0CE106BK618	10UF KME 50V M FL TP5
C902R	0CE475DK618	4.7UF STD 50V 20% FL TP 5	C954	0CE106BK618	10UF KME 50V M FL TP5
C902G	0CE475DK618	4.7UF STD 50V 20% FL TP 5	C955	0CE106DK618	10UF STD 50V M FL TP5
C902	0CE476BK618	47UF KME 50V M FL TP5	C956	0CE336DP618	33UF STD 160V M FL TP5
C903	0CE106BK618	10UF KME 50V M FL TP5	C957	0CE107DN618	1000UF STD 100V M FL TP5
C903B	0CK1040K945	0.1UF 50V Z F TR	C958	0CQ1031N509	0.01U 100V K POLY TP
C903R	0CK1040K945	0.1UF 50V Z F TR	C960	0CK4720W510	4700P 500V K B S
C903G	0CK1040K945	0.1UF 50V Z F TR	C972	0CE106BR618	10UF KME 250V M FL TP5
C904	0CE106BK618	10UF KME 50V M FL TP5	C973	0CE106BK618	10UF KME 50V M FL TP5
C904B	0CK1040K945	0.1UF 50V Z F TR	C974	0CE106BK618	10UF KME 50V M FL TP5
C904G	0CK1040K945	0.1UF 50V Z F TR	C975	0CE106BK618	10UF KME 50V M FL TP5
C904R	0CK1040K945	0.1UF 50V Z F TR	C976	0CE336DP618	33UF STD 160V M FL TP5
C905R	0CC0200K115	2P 50V D NP0 TS	C977	0CE107DN618	1000UF STD 100V M FL TP5
C905B	0CC0500K115	5P 50V D NP0 TS	C978	0CQ1031N509	0.01U 100V K POLY TP
C905G	0CC0500K115	5P 50V D NP0 TS	C980	0CK4720W510	4700P 500V K B S
C905	0CQ1031N509	0.01U 100V K POLY TP	C1004	0CN2210K519	220P 50V K B TA52
C906	0CE476BK618	47UF KME 50V M FL TP5	C1005	0CN2210K519	220P 50V K B TA52
C906B	0CE476DR618	47UF STD 250V 20% FL TP 5	C1006	0CN1040K949	0.1M 50V Z F TA52
C906R	0CE476DR618	47UF STD 250V 20% FL TP 5	C1007	0CE475DK618	4.7UF STD 50V 20% FL TP 5
C906G	0CE476DR618	47UF STD 250V 20% FL TP 5	C2001	0CK1510K515	150P 50V K B TS
C907	0CE106BK618	10UF KME 50V M FL TP5	C2003	0CK1510K515	150P 50V K B TS
C907B	0CE106DR618	10UF STD 250V M FL TP5	C2005	0CK1510K515	150P 50V K B TS
C907G	0CE106DR618	10UF STD 250V M FL TP5	C2007	0CK1510K515	150P 50V K B TS
C907R	0CE106DR618	10UF STD 250V M FL TP5	C2009	0CK1510K515	150P 50V K B TS
C908	0CE336DK618	33UF STD 50V M FL TP5	C2011	0CK1510K515	150P 50V K B TS
C908B	0CK5610W515	560P 500V K B TS	C2031	0CC3310K405	330P 50V J SL TS
C908G	0CK5610W515	560P 500V K B TS	C2032	0CC3310K405	330P 50V J SL TS
C908R	0CK5610W515	560P 500V K B TS	C2033	0CC3310K405	330P 50V J SL TS
C909	0CE476BK618	47UF KME 50V M FL TP5	C2034	0CC3310K405	330P 50V J SL TS
C909G	0CK22202515	2200PF 2KV K B TR	C2035	0CC3310K405	330P 50V J SL TS
C909R	0CK22202515	2200PF 2KV K B TR	C2036	0CC3310K405	330P 50V J SL TS

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
C2041	0CE107SF6DC	100UF MVG 16V M SMD R/TP	CP803	0CK10201515	1000P 1KV K B TS
C2041	0CE225DK618	2.2UF STD 50V 20% FL TP 5	CP804	0CK10201515	1000P 1KV K B TS
C2042	0CE225DK618	2.2UF STD 50V 20% FL TP 5	CP806	0CE477BF618	470UF KME 16V M FL TP5
C2048	0CK1030K945	0.01UF 50V Z F TR	CP809	0CE4763F618	47UF SRE 16V M FL TP5
C2049	0CK1030K945	0.01UF 50V Z F TR	CP828	181-120L	3300PF 4KV M E FMTW LEAD4.5
C2050	0CE108DJ618	1000UF STD 35V M FL TP5	ZD01P	0CN1020K519	1000P 50V K B TA52
C2051	0CE108DJ618	1000UF STD 35V M FL TP5	COIL & TRANSFORMER		
C2052	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L01P	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2054	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L001	0LA0332K039	INDUCTOR,33UH 10% 4X10.5 TA52
C2056	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L002	0LA0332K039	INDUCTOR,33UH 10% 4X10.5 TA52
C2060	0CE337DK618	330UF STD 50V M FL TP5	L003	0LA0332K039	INDUCTOR,33UH 10% 4X10.5 TA52
C2061	0CE337DK618	330UF STD 50V M FL TP5	L004	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2063	0CK1040K945	0.1UF 50V Z F TR	L102	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2064	0CK1040K945	0.1UF 50V Z F TR	L103	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2065	0CK1040K945	0.1UF 50V Z F TR	L104	0LA0102K139	INDUCTOR,10UH K 4*10.5 TP
C2066	0CK1040K945	0.1UF 50V Z F TR	L105	0LA0102K139	INDUCTOR,10UH K 4*10.5 TP
C2067	0CK1040K945	0.1UF 50V Z F TR	L201	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2069	0CK1040K945	0.1UF 50V Z F TR	L202	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2071	0CE477DD618	470UF STD 10V M FL TP5	L203	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2073	0CE477DD618	470UF STD 10V M FL TP5	L204	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2074	0CK1040K945	0.1UF 50V Z F TR	L205	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2075	0CK1040K945	0.1UF 50V Z F TR	L206	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2080	0CK1040K945	0.1UF 50V Z F TR	L207	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2081	0CK1040K945	0.1UF 50V Z F TR	L208	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2082	0CK1040K945	0.1UF 50V Z F TR	L209	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2091	0CE107DK618	100UF STD 50V M FL TP5	L210	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2092	0CE107DK618	100UF STD 50V M FL TP5	L301	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2093	0CE337DK618	330UF STD 50V M FL TP5	L302	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2094	0CK1040K945	0.1UF 50V Z F TR	L303	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2095	0CK1040K945	0.1UF 50V Z F TR	L304	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2096	0CK1040K945	0.1UF 50V Z F TR	L305	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2119	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L306	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2130	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L307	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2133	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L308	0LA0102K119	INDUCTOR,10UH K 2.3*3.4 TP
C2142	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L401	150-717J	COIL,CHOKE 560UH (E/W)
C2143	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L402	6140VE0001P	COIL,LINEARITY 12UH 0.1PHY 30.5TURN
C2170	0CE475VK6DC	4.7UF MV 50V 20% R/TP(SMD) SMD	L404	0LA1000K139	INDUCTOR,100UH K 4*10.5 TP
C2202	0CE476SF6DC	47UF MVG 16V M SMD R/TP	L405	150-717K	COIL,CHOKE 1.1UH
C2207	0CE476SF6DC	47UF MVG 16V M SMD R/TP	L406	150-C02F	COIL,CHOKE 82UH R1217
C2210	0CE476SF6DC	47UF MVG 16V M SMD R/TP	L501	0LA0332K039	INDUCTOR,33UH 10% 4X10.5 TA52
C2215	0CE476SF6DC	47UF MVG 16V M SMD R/TP	L508	0LA0121K119	INDUCTOR,1.2UH K
C2605	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L509	0LA0121K119	INDUCTOR,1.2UH K
C2606	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L510	0LA0121K119	INDUCTOR,1.2UH K
C2802	0CN1040K949	0.1M 50V Z F TA52	L705	0LA0102K119	INDUCTOR,10UH K
C2803	0CN4710K519	470P 50V K B TA52	L707	0LA0121K119	INDUCTOR,1.2UH K
C2804	0CE105SK6DC	1UF MVG 50V M SMD R/TP	L708	0LA0121K119	INDUCTOR,1.2UH K
C2805	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L709	0LA0121K119	INDUCTOR,1.2UH K
C2807	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L831	150-C02F	COIL,CHOKE 82UH R1217
C2814	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L832	150-C02F	COIL,CHOKE 82UH R1217
C2816	0CE107SF6DC	100UF MVG 16V M SMD R/TP	L835	150-C02F	COIL,CHOKE 82UH R1217
CP801	0CE477BH618	470UF KME TYPE 25V 20% FL TP 5	L841	150-C02F	COIL,CHOKE 82UH R1217
CP802	0CE107BJ618	100UF KME 35V M FL TP5			

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
L845	150-C02F	COIL,CHOKE 82UH R1217	P402B	366-942L	CONNECTOR (CIRC),2.5MM 12P BW250
L851	150-C02F	COIL,CHOKE 82UH R1217	P402A	387-812L	CONNECTOR ASSY,YJN250 12P
L861	150-C02F	COIL,CHOKE 82UH R1217	P403B	366-942J	CONNECTOR (CIRC),2.5MM 10P BW250
L871	150-C02F	COIL,CHOKE 82UH R1217	P403A	387-812J	CONNECTOR ASSY,YJN250 10P
L901	150-C02F	COIL,CHOKE 82UH R1217	P404B	366-942K	CONNECTOR (CIRC),2.5MM 11P BW250
L902	150-C02F	COIL,CHOKE 82UH R1217	P404A	387-812K	CONNECTOR ASSY,YJN250 11P
L1001	OLA0472K119	INDUCTOR,47UH K	P404	6602V25007A	CONNECTOR (CIRC),2.5MM 6P 35772-0621
L1002	OLA0472K119	INDUCTOR,47UH K	P405B	366-932C	CONNECTOR (CIRC),2.5MM 4P GIL-G
L2001	OLA0101K119	INDUCTOR,1.0UH K	P407A	366-043D	CONNECTOR (CIRC),ASSY,PLUG(4P)
L2002	OLA0101K119	INDUCTOR,1.0UH K	P408A	366-043D	CONNECTOR (CIRC),ASSY,PLUG(4P)
L2003	OLA0101K119	INDUCTOR,1.0UH K	P409A	366-043D	CONNECTOR (CIRC),ASSY,PLUG(4P)
L2004	OLA0101K119	INDUCTOR,1.0UH K	P602	366-932B	CONNECTOR (CIRC),2.5MM 3P GIL-G
L2005	OLA0101K119	INDUCTOR,1.0UH K	P801B	6631V23001S	CONNECTOR ASSY,2P 1200MM H-H UL
L2006	OLA0101K119	INDUCTOR,1.0UH K	P802B	6631V23001T	CONNECTOR ASSY,3P 1200MM H-H UL
L2010	OLA0272K139	INDUCTOR,27UH K	P805B	366-921F	CONNECTOR (CIRC),2.5MM 7P
L2011	OLA0272K139	INDUCTOR,27UH K	P805A	366-921F	CONNECTOR (CIRC),2.5MM 7P
LP810	150-C02F	COIL,CHOKE 82UH R1217	P810B	366-921L	CONNECTOR (CIRC),2.5MM 12P
T401	6170VC0002A	TRANSFORMER,H-DRIVE EER-2619	P810A	366-921L	CONNECTOR (CIRC),2.5MM 12P
T402	6170VC0002A	TRANSFORMER,H-DRIVE EER-2619	P811B	366-921H	CONNECTOR (CIRC),2.5MM 9P
T403	6174Z-6400B	FBT FTMPNB1-T6400B	P811A	366-921H	CONNECTOR (CIRC),2.5MM 9P
T405	151-E05E	TRANSFORMER,POWER EER4215 1550UH	P901B	366-921J	CONNECTOR (CIRC),2.5MM 10P
T406	151-E06A	TRANSFORMER,POWER EER2834 0UH	P901A	366-922J	CONNECTOR (CIRC),2.5MM 10P
T801	6170VMCA16H	TRANSFORMER,SMPS EE5555 300UH	P902B	366-921D	CONNECTOR (CIRC),2.5MM 5P
T802	151-D02G	TRANSFORMER,STAND-BY EER3541 0UH	P903B	366-921H	CONNECTOR (CIRC),2.5MM 9P
T826	6170VC0003C	TRANSFORMER,H-DRIVER DRUM 10*12	P903A	387-A09F	CONNECTOR ASSY,9P (L=350)
CONNECTOR			P904B	366-921H	CONNECTOR (CIRC),2.5MM 9P
P001	366-173L	CONNECTOR (CIRC),2.5MM 12*2P AEPH-254	P904A	387-A09F	CONNECTOR ASSY,9P (L=350)
P01A	6602V25007B	CONNECTOR (CIRC),2.5MM 8P 35772-0821	P2011	366-921G	CONNECTOR (CIRC),2.5MM 8P
P002	366-173G	CONNECTOR (CIRC),2.5MM 8*2P AEPH-254	SPKJ20	385-102A	CONNECTOR (CIRC),SPEAKER SP016A
P002A	366-921H	CONNECTOR (CIRC),2.5MM 9P GIL-G	SPKJ20	385-102A	CONNECTOR (CIRC),SPEAKER SP016A
P003	366-173L	CONNECTOR (CIRC),2.5MM 12*2P AEPH-254	RESISTOR		
P003A	387-A08A	CONNECTOR ASSY ASSY,8P (L=100)	AR001	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P004	366-922M	CONNECTOR (CIRC),2.5MM 13P GIL-G	AR002	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P004EP	366-932D	CONNECTOR (CIRC),2.5MM 5P GIL-G	AR003	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P05A	366-921C	CONNECTOR (CIRC),2.5MM 4P GIL-G	AR004	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P005	366-922B	CONNECTOR (CIRC),2.5MM 3P GIL-G	AR005	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P005A	387-812L	CONNECTOR ASSY YJN250 12P(PCB	AR006	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P006IP	366-932E	CONNECTOR (CIRC),2.5MM 6P GIL-G	AR007	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P101A	366-922L	CONNECTOR (CIRC),2.5MM 12P GIL-G	AR008	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P119A	366-009D	CONNECTOR (CIRC),2.36PAI 1P	AR009	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P201	366-922L	CONNECTOR (CIRC),2.5MM 12P GIL-G	AR010	0RRZVTA001A	MNR-14-E0A-J-101 R OHM 100 OH
P201	6602V25007C	CONNECTOR (CIRC),2.5MM 12P 35772-1221	J179	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52
P202	6602V00010B	CONNECTOR (CIRC),ETC 32P 53319-0320	J184	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52
P203	6602V00010B	CONNECTOR (CIRC),ETC 32P 53319-0320	J423	0RD0222F609	22 OHM 1/6 W 5.00% TA52
P204B	6631V25044A	CONNECTOR ASSY,12P 1000MM H-B SHIELD	J709	0RD2200F609	220 OHM 1/6 W 5.00% TA52
P211B	366-173N	CONNECTOR (CIRC),AEPH254-D28R(14*2)	L403	0RF0101K607	1 OHM 2 W 5.00% TA62
P212B	366-173L	CONNECTOR (CIRC),2.5MM 12*2P	L504	0RD3000F609	300 OHM 1/6 W 5.00% TA52
P213B	366-173N	CONNECTOR (CIRC),AEPH254-D28R(14*2)	R002	0RD2200F609	220 OHM 1/6 W 5.00% TA52
P214B	366-173N	CONNECTOR (CIRC),AEPH254-D28R(14*2)	R003	0RD2200F609	220 OHM 1/6 W 5.00% TA52
P401B	366-921G	CONNECTOR (CIRC),2.5MM 8P GIL-G	R005	0RD1001F609	1K OHM 1/6 W 5.00% TA52
P401A	387-A08A	CONNECTOR ASSY,8P (L=100)	R007	0RD1001F609	1K OHM 1/6 W 5.00% TA52

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
R008	ORD1001F609	1K OHM 1/6 W 5.00% TA52	R116	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R009	ORD1001F609	1K OHM 1/6 W 5.00% TA52	R117	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R010	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R118	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52
R011	ORD1002F609	10K OHM 1/6 W 5.00% TA52	R119	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52
R012	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R120	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52
R013	ORD2001F609	2K OHM 1/6 W 5.00% TA52	R122	0RD5601F609	5.6K OHM 1/6 W 5.00% TA52
R014	ORD4702F609	47K OHM 1/6 W 5.00% TA52	R124	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R015	ORD7500F609	750 OHM 1/6 W 5.00% TA52	R126	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R016	ORD3600F609	360 OHM 1/6 W 5.00% TA52	R127	0RD1002F609	10K OHM 1/6 W 5.00% TA52
R017	ORD7500F609	750 OHM 1/6 W 5.00% TA52	R128	0RD4700F609	470 OHM 1/6 W 5.00% TA52
R018	ORD3600F609	360 OHM 1/6 W 5.00% TA52	R129	0RD0102F609	10 OHM 1/6 W 5.00% TA52
R019	ORD7500F609	750 OHM 1/6 W 5.00% TA52	R130	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52
R020	ORD3600F609	360 OHM 1/6 W 5.00% TA52	R131	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52
R023	ORD6200F609	620 OHM 1/6 W 5.00% TA52	R132	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R024	ORD6200F609	620 OHM 1/6 W 5.00% TA52	R133	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R025	ORD6200F609	620 OHM 1/6 W 5.00% TA52	R136	0RD2700F609	270 OHM 1/6 W 5.00% TA52
R026	ORD1001F609	1K OHM 1/6 W 5.00% TA52	R137	0RD2200F609	220 OHM 1/6 W 5.00% TA52
R029	ORD2200F609	220 OHM 1/6 W 5.00% TA52	R138	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R030	ORD1002F609	10K OHM 1/6 W 5.00% TA52	R139	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52
R031	ORD5601F609	5.6K OHM 1/6 W 5.00% TA52	R140	0RD1001H609	1K OHM 1/2 W 5.00% TA52
R032	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R141	0RD4700F609	470 OHM 1/6 W 5.00% TA52
R033	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R201	0RD0102H609	10 OHM 1/2 W 5.00% TA52
R034	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R301	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R035	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R302	0RF0241K607	2.4 OHM 2 W 5.00% TA62
R036	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R303	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R037	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R304	0RN5601F409	5.6K OHM 1/6 W 1.00% TA52
R038	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R305	0RS0101H609	1 OHM 1/2 W 5.00% TA52
R039	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R306	0RF0241K607	2.4 OHM 2 W 5.00% TA62
R040	ORD1000F609	100 OHM 1/6 W 5.00% TA52	R308	0RN5601F409	5.6K OHM 1/6 W 1.00% TA52
R041	ORD1002F609	10K OHM 1/6 W 5.00% TA52	R309	0RD3901F609	3.9K OHM 1/6 W 5.00% TA52
R042	ORD1000F609	100 OHM 1/6 W 5.00% TA52	R310	0RD3901F609	3.9K OHM 1/6 W 5.00% TA52
R043	ORD1000F609	100 OHM 1/6 W 5.00% TA52	R326	0RS1001H609	1K OHM 1/2 W 5.00% TA52
R044	ORD1000F609	100 OHM 1/6 W 5.00% TA52	R327	0RS1001H609	1K OHM 1/2 W 5.00% TA52
R045	ORD1000F609	100 OHM 1/6 W 5.00% TA52	R328	0RS1001H609	1K OHM 1/2 W 5.00% TA52
R046	ORD2001F609	2K OHM 1/6 W 5.00% TA52	R340	0RD1000H609	100 OHM 1/2 W 5.00% TA52
R048	ORD1000F609	100 OHM 1/6 W 5.00% TA52	R341	0RD1000H609	100 OHM 1/2 W 5.00% TA52
R050	ORD1000F609	100 OHM 1/6 W 5.00% TA52	R342	0RD1000H609	100 OHM 1/2 W 5.00% TA52
R051	ORD1002F609	10K OHM 1/6 W 5.00% TA52	R344	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52
R052	ORD2201F609	2.2K OHM 1/6 W 5.00% TA52	R401	0RS1801K607	1.8K OHM 2 W 5.00% TA62
R101	ORD2700F609	270 OHM 1/6 W 5.00% TA52	R402	0RS1501K607	1.5K OHM 2 W 5.00% TA62
R102	ORD2200F609	220 OHM 1/6 W 5.00% TA52	R403	0RS2200K607	220 OHM 2 W 5.00% TA62
R103	ORD0102F609	10 OHM 1/6 W 5.00% TA52	R404	0RS1501K607	1.5K OHM 2 W 5.00% TA62
R104	ORD1001H609	1K OHM 1/2 W 5.00% TA52	R405	0RS2702K607	27K OHM 2 W 5.00% TA62
R105	ORD1002F609	10K OHM 1/6 W 5.00% TA52	R406	0RS2702K607	27K OHM 2 W 5.00% TA62
R106	ORD3301F609	3.3K OHM 1/6 W 5.00% TA52	R407	0RS2702K607	27K OHM 2 W 5.00% TA62
R107	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R408	0RD1000H609	100 OHM 1/2 W 5.00% TA52
R108	ORD1001F609	1K OHM 1/6 W 5.00% TA52	R409	0RD3901H609	3.9K OHM 1/2 W 5.00% TA52
R109	ORD2201F609	2.2K OHM 1/6 W 5.00% TA52	R410S	0RD4701H609	4.7K OHM 1/2 W 5.00% TA52
R110	ORD2201F609	2.2K OHM 1/6 W 5.00% TA52	R410	0RS3301K607	3.3K OHM 2 W 5.00% TA62
R111	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R411S	0RD1002F609	10K OHM 1/6 W 5.00% TA52
R112	ORD4701F609	4.7K OHM 1/6 W 5.00% TA52	R411	0RD2202H609	22K OHM 1/2 W 5.00% TA52
R113	ORD0102F609	10 OHM 1/6 W 5.00% TA52	R412S	0RD1002F609	10K OHM 1/6 W 5.00% TA52

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
R412	0RD8200H609	820 OHM 1/2 W 5.00% TA52	R476	0RS4701K607	4.7K OHM 2 W 5.00% TA62
R413S	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52	R478	0RS2001K607	2K OHM 2 W 5.00% TA62
R413	0RS2702K607	27K OHM 2 W 5.00% TA62	R479	0RD5601F609	5.6K OHM 1/6 W 5.00% TA52
R414	180-A01F	RW ROUND G 2W 0.50 J TA31(63)	R480	0RS2001K607	2K OHM 2 W 5.00% TA62
R415S	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R481	0RS3902K607	39K OHM 2 W 5.00% TA62
R416S	0RD2222F609	22 OHM 1/6 W 5.00% TA52	R482	0RS3902K607	39K OHM 2 W 5.00% TA62
R416	180-C02M	5.6K OHM 1/2 W 10% TA52 ERC12G	R483	0RN2202F409	22K OHM 1/6 W 1.00% TA52
R417S	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R484	0RN9102F409	91K OHM 1/6 W 1.00% TA52
R417	0RD1501H609	1.5K OHM 1/2 W 5.00% TA52	R485	0RS0561K607	5.6 OHM 2 W 5.00% TA62
R418S	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52	R486	0RD1002H609	10K OHM 1/2 W 5.00% TA52
R419S	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R487	0RS0561K607	5.6 OHM 2 W 5.00% TA62
R419	0RS0221H609	2.2 OHM 1/2 W 5.00% TA52	R488	180-A01B	RW ROUND G 2W 0.11 K TA31(63)
R420S	0RD1001F609	1K OHM 1/6 W 5.00% TA52	R489	0RD0472F609	47 OHM 1/6 W 5.00% TA52
R421	0RD0102F609	10 OHM 1/6 W 5.00% TA52	R490	0RN2202F409	22K OHM 1/6 W 1.00% TA52
R422	0RF0470K607	0.47 OHM 2 W 5.00% TA62	R491	180-A01B	RW ROUND G 2W 0.11 K TA31(63)
R423	0RD0222F609	22 OHM 1/6 W 5.00% TA52	R492	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R424	180-A03Q	RW RECT G 7W 1.0 J DOUBLE(SP)	R493	0RF0470H609	0.47 OHM 1/2 W 5.00% TA52
R426	0RS1801K607	1.8K OHM 2 W 5.00% TA62	R494	0RF0121H609	1.2 OHM 1/2 W 5.00% TA52
R427	0RS1201K607	1.2K OHM 2 W 5.00% TA62	R496	0RD1601F609	1.6K OHM 1/6 W 5.00% TA52
R428	0RS1201K607	1.2K OHM 2 W 5.00% TA62	R497	0RD7501F609	7.5K OHM 1/6 W 5.00% TA52
R429	0RD1303F609	130K OHM 1/6 W 5.00% TA52	R498	0RD2202H609	22K OHM 1/2 W 5.00% TA52
R430	0RD4702H609	47K OHM 1/2 W 5.00% TA52	R499	0RD2002F609	20K OHM 1/6 W 5.00% TA52
R432	0RD4700H609	470 OHM 1/2 W 5.00% TA52	R503	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52
R433	0RS0561K607	5.6 OHM 2 W 5.00% TA62	R504	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52
R437	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52	R505	0RD0102F609	10 OHM 1/6 W 5.00% TA52
R438	0RD5601F609	5.6K OHM 1/6 W 5.00% TA52	R506	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R439	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52	R507	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R440	0RD5101F609	5.1K OHM 1/6 W 5.00% TA52	R508	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R442	0RD5101F609	5.1K OHM 1/6 W 5.00% TA52	R509	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R443	0RD0472F609	47 OHM 1/6 W 5.00% TA52	R516	0RD0822F609	82 OHM 1/6 W 5.00% TA52
R444	0RD1000F609	100 OHM 1/6 W 5.00% TA52	R517	0RD0822F609	82 OHM 1/6 W 5.00% TA52
R446	0RD5602F609	56K OHM 1/6 W 5.00% TA52	R518	0RD0822F609	82 OHM 1/6 W 5.00% TA52
R447	0RD9102H609	91K OHM 1/2 W 5.00% TA52	R519	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R448	0RD2002F609	20K OHM 1/6 W 5.00% TA52	R520	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R449	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R521	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R450	0RD3001H609	3K OHM 1/2 W 5.00% TA52	R600	0RD1201F609	1.2K OHM 1/6 W 5.00% TA52
R451	0RD1001F609	1K OHM 1/6 W 5.00% TA52	R601	0RD1101F609	1.1K OHM 1/6 W 5.00% TA52
R452	0RD3001H609	3K OHM 1/2 W 5.00% TA52	R602	0RD1201F609	1.2K OHM 1/6 W 5.00% TA52
R454	0RS0470H609	0.47 OHM 1/2 W 5.00% TA52	R603	0RD1201F609	1.2K OHM 1/6 W 5.00% TA52
R458	0RD1503F609	150K OHM 1/6 W 5.00% TA52	R604	0RD1101F609	1.1K OHM 1/6 W 5.00% TA52
R459	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R605	0RD1201F609	1.2K OHM 1/6 W 5.00% TA52
R460	0RD1000F609	100 OHM 1/6 W 5.00% TA52	R606	0RD2001F609	2K OHM 1/6 W 5.00% TA52
R461	0RMZVBK003A	4.7 OHM 5W J(5%) RWR V-TYPE(PI	R607	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R463	0RD1001F609	1K OHM 1/6 W 5.00% TA52	R608	0RD1002F609	10K OHM 1/6 W 5.00% TA52
R464	0RD6801F609	6.8K OHM 1/6 W 5.00% TA52	R609	0RD1502F609	15K OHM 1/6 W 5.00% TA52
R465	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R610	0RD4703F609	470K OHM 1/6 W 5.00% TA52
R466	0RD1001F609	1K OHM 1/6 W 5.00% TA52	R611	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52
R467	0RD1000F609	100 OHM 1/6 W 5.00% TA52	R613	0RD1002F609	10K OHM 1/6 W 5.00% TA52
R469	0RS4701K607	4.7K OHM 2 W 5.00% TA62	R614	0RD2702F609	27K OHM 1/6 W 5.00% TA52
R470	0RS2002H609	20K OHM 1/2 W 5.00% TA52	R615	0RD2702F609	27K OHM 1/6 W 5.00% TA52
R472	0RS3301K607	3.3K OHM 2 W 5.00% TA62	R616	0RD2702F609	27K OHM 1/6 W 5.00% TA52
R475	0RD5600H609	560 OHM 1/2 W 5.00% TA52	R617	0RD2702F609	27K OHM 1/6 W 5.00% TA52

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
R618	ORD4703F609	470K OHM 1/6 W 5.00% TA52	R894	0RS0332K607	33 OHM 2 W 5.00% TA62
R620	ORD0471F609	4.7 OHM 1/6 W 5.00% TA52	R901B	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R621	ORD1502F609	15K OHM 1/6 W 5.00% TA52	R901R	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R623	ORD2703F609	270K OHM 1/6 W 5.00% TA52	R901G	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R624	ORD1502F609	15K OHM 1/6 W 5.00% TA52	R902B	0RD5101F609	5.1K OHM 1/6 W 5.00% TA52
R625	0RS1001H609	1K OHM 1/2 W 5.00% TA52	R902R	0RD5101F609	5.1K OHM 1/6 W 5.00% TA52
R636	ORD1001F609	1K OHM 1/6 W 5.00% TA52	R902G	0RD5101F609	5.1K OHM 1/6 W 5.00% TA52
R638	ORD6800F609	680 OHM 1/6 W 5.00% TA52	R903B	0RN3001F409	3K OHM 1/6 W 1.00% TA52
R639	ORD6800F609	680 OHM 1/6 W 5.00% TA52	R903G	0RN3001F409	3K OHM 1/6 W 1.00% TA52
R641	ORD6200F609	620 OHM 1/6 W 5.00% TA52	R903R	0RN3601F409	3.6K OHM 1/6 W 1.00% TA52
R643	ORD6200F609	620 OHM 1/6 W 5.00% TA52	R904B	0RD6200F609	620 OHM 1/6 W 5.00% TA52
R650	0RD1001F609	1K OHM 1/6 W 5.00% TA52	R904G	0RD6200F609	620 OHM 1/6 W 5.00% TA52
R651	ORD1502F609	15K OHM 1/6 W 5.00% TA52	R904R	0RD6200F609	620 OHM 1/6 W 5.00% TA52
R652	ORD1002F609	10K OHM 1/6 W 5.00% TA52	R905B	0RD0102F609	10 OHM 1/6 W 5.00% TA52
R661	ORD0471F609	4.7 OHM 1/6 W 5.00% TA52	R905G	0RD0102F609	10 OHM 1/6 W 5.00% TA52
R663	ORD0471F609	4.7 OHM 1/6 W 5.00% TA52	R905R	0RD0102F609	10 OHM 1/6 W 5.00% TA52
R664	ORD0471F609	4.7 OHM 1/6 W 5.00% TA52	R906B	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52
R665	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R906R	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52
R666	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R906G	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52
R667	180-777H	RWR 7W 910 J VERT	R907B	0RD1203F609	120K OHM 1/6 W 5.00% TA52
R669	ORD4702F609	47K OHM 1/6 W 5.00% TA52	R907R	0RD1203F609	120K OHM 1/6 W 5.00% TA52
R670	ORD1502F609	15K OHM 1/6 W 5.00% TA52	R907G	0RD1203F609	120K OHM 1/6 W 5.00% TA52
R671	ORD1502F609	15K OHM 1/6 W 5.00% TA52	R908B	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R742	0RN2202F409	22K OHM 1/6 W 1.00% TA52	R908G	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R742	0RS3301K607	3.3K OHM 2 W 5.00% TA62	R908R	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R756	0RN1002F409	10K OHM 1/6 W 1.00% TA52	R909B	0RS4702K607	47K OHM 2 W 5.00% TA62
R801	0RKZVTA001K	0.47M OHM 1/2 W 5% TA52 PILKOR	R909R	0RS4702K607	47K OHM 2 W 5.00% TA62
R802	0RS1802K607	18K OHM 2 W 5.00% TA62	R909G	0RS4702K607	47K OHM 2 W 5.00% TA62
R803	0RS1802K607	18K OHM 2 W 5.00% TA62	R910B	0RC2200H609	220 OHM 1/2 W 5.00% TA52
R804	180-A01D	RW ROUND G 2W 0.16 J TA31(63)	R910G	0RC2200H609	220 OHM 1/2 W 5.00% TA52
R805	180-A01D	RW ROUND G 2W 0.16 J TA31(63)	R910R	0RC2200H609	220 OHM 1/2 W 5.00% TA52
R806	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52	R911B	0RD1002H609	10K OHM 1/2 W 5.00% TA52
R807	0RD9101F609	9.1K OHM 1/6 W 5.00% TA52	R911G	0RD1002H609	10K OHM 1/2 W 5.00% TA52
R808	0RD2021H609	2 OHM 1/2 W 5.00% TA52	R911R	0RD1002H609	10K OHM 1/2 W 5.00% TA52
R810	0RD0472H609	47 OHM 1/2 W 5.00% TA52	R912B	0RD1004H609	1M OHM 1/2 W 5.00% TA52
R812	0RD1502H609	15K OHM 1/2 W 5.00% TA52	R912G	0RD1004H609	1M OHM 1/2 W 5.00% TA52
R813	0RN5602F409	56K OHM 1/6 W 1.00% TA52	R912R	0RD1004H609	1M OHM 1/2 W 5.00% TA52
R814	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52	R913B	0RF0470H609	0.47 OHM 1/2 W 5.00% TA52
R814	0RN2202F409	22K OHM 1/6 W 1.00% TA52	R913G	0RF0470H609	0.47 OHM 1/2 W 5.00% TA52
R815	0RD1001F609	1K OHM 1/6 W 5.00% TA52	R913R	0RF0470H609	0.47 OHM 1/2 W 5.00% TA52
R819	0RS0222H609	22 OHM 1/2 W 5.00% TA52	R914B	0RKZVTA001K	0.47M OHM 1/2 W 5% TA52 PILKOR
R829	0RKZVTA001D	10M OHM 1/2 W 5% TA52 UL PILKO	R914G	0RKZVTA001K	0.47M OHM 1/2 W 5% TA52 PILKOR
R835	0RD2201H609	2.2K OHM 1/2 W 5.00% TA52	R914R	0RKZVTA001K	0.47M OHM 1/2 W 5% TA52 PILKOR
R851	0RD1502H609	15K OHM 1/2 W 5.00% TA52	R915B	0RD1003H609	100K OHM 1/2 W 5.00% TA52
R852	0RD1502H609	15K OHM 1/2 W 5.00% TA52	R915G	0RD1003H609	100K OHM 1/2 W 5.00% TA52
R871	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52	R915R	0RD1003H609	100K OHM 1/2 W 5.00% TA52
R872	0RD2001F609	2K OHM 1/6 W 5.00% TA52	R916B	0RD3900F609	390 OHM 1/6 W 5.00% TA52
R873	0RS3301K607	3.3K OHM 2 W 5.00% TA62	R916G	0RD3900F609	390 OHM 1/6 W 5.00% TA52
R874	0RD7500F609	750 OHM 1/6 W 5.00% TA52	R916R	0RD3900F609	390 OHM 1/6 W 5.00% TA52
R891	0RD4302F609	43K OHM 1/6 W 5.00% TA52	R917G	0RD2402F609	24K OHM 1/6 W 5.00% TA52
R892	0RD5602F609	56K OHM 1/6 W 5.00% TA52	R918G	0RD1002F609	10K OHM 1/6 W 5.00% TA52
R893	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52	R919B	0RD6201F609	6.2K OHM 1/6 W 5.00% TA52

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic CQ : Polyester CE : Electrolytic	RD : Carbon Film RS : Metal Oxide Film RN : Metal Film RF : Fusible
---	---	--

LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION
R919R	ORD6201F609	6.2K OHM 1/6 W 5.00% TA52	R1005	0RD0752F609	75 OHM 1/6 W 5.00% TA52
R919G	ORD6201F609	6.2K OHM 1/6 W 5.00% TA52	R1400	0RD1501F609	1.5K OHM 1/6 W 5.00% TA52
R920B	ORD1101F609	1.1K OHM 1/6 W 5.00% TA52	R1401	0RD4700F609	470 OHM 1/6 W 5.00% TA52
R920G	ORD1101F609	1.1K OHM 1/6 W 5.00% TA52	R1406	0RD3301F609	3.3K OHM 1/6 W 5.00% TA52
R920R	ORD1501F609	1.5K OHM 1/6 W 5.00% TA52	R1407	0RD2701H609	2.7K OHM 1/2 W 5.00% TA52
R920	0RF0102H609	10 OHM 1/2 W 5.00% TA52	R1408	0RD3301F609	3.3K OHM 1/6 W 5.00% TA52
R921B	ORD2001F609	2K OHM 1/6 W 5.00% TA52	R1409	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R921G	ORD2001F609	2K OHM 1/6 W 5.00% TA52	R1410	0RD4702F609	47K OHM 1/6 W 5.00% TA52
R921R	ORD2001F609	2K OHM 1/6 W 5.00% TA52	R1416	0RD1002F609	10K OHM 1/6 W 5.00% TA52
R923B	0RCZVTA002E	4.7K OHM 1/2 W 10% TA52 .	R1417	0RD6801F609	6.8K OHM 1/6 W 5.00% TA52
R923G	0RCZVTA002E	4.7K OHM 1/2 W 10% TA52 .	R1418	0RD1200F609	120 OHM 1/6 W 5.00% TA52
R923R	0RCZVTA002E	4.7K OHM 1/2 W 10% TA52 .	R1419	0RS2202H609	22K OHM 1/2 W 5.00% TA52
R925B	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R1420	0RS2002H609	20K OHM 1/2 W 5.00% TA52
R925G	0RD1002F609	10K OHM 1/6 W 5.00% TA52	R1421	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R925	0RF0102H609	10 OHM 1/2 W 5.00% TA52	R1422	0RD2200F609	220 OHM 1/6 W 5.00% TA52
R926	0RF0102H609	10 OHM 1/2 W 5.00% TA52	R1423	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R930	ORD0271H609	2.7 OHM 1/2 W 5.00% TA52	R1424	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52
R931	ORD1801H609	1.8K OHM 1/2 W 5.00% TA52	R1425	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52
R932	ORD1801H609	1.8K OHM 1/2 W 5.00% TA52	R1428	0RD2003H609	200K OHM 1/2 W 5.00% TA52
R933	0RD0102H609	10 OHM 1/2 W 5.00% TA52	R1435	0RD1001H609	1K OHM 1/2 W 5.00% TA52
R934	0RD0271H609	2.7 OHM 1/2 W 5.00% TA52	R1436	0RD2001H609	2K OHM 1/2 W 5.00% TA52
R937	0RD1000H609	100 OHM 1/2 W 5.00% TA52	R1440	0RF0470H609	0.47 OHM 1/2 W 5.00% TA52
R938	0RD1000H609	100 OHM 1/2 W 5.00% TA52	R1441	0RS0470K607	0.47 OHM 2 W 5.00% TA62
R940	ORD3902H609	39K OHM 1/2 W 5.00% TA52	R1447	0RD2201F609	2.2K OHM 1/6 W 5.00% TA52
R941	ORD3902H609	39K OHM 1/2 W 5.00% TA52	R1450	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52
R943	0RS1800J607	180 OHM 1 W 5.00% TA62	R1451	0RD1201F609	1.2K OHM 1/6 W 5.00% TA52
R944	0RD0472F609	47 OHM 1/6 W 5.00% TA52	R1452	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52
R950	0RD0271H609	2.7 OHM 1/2 W 5.00% TA52	R1453	0RD4301F609	4.3K OHM 1/6 W 5.00% TA52
R951	0RD1801H609	1.8K OHM 1/2 W 5.00% TA52	R1454	0RD4700F609	470 OHM 1/6 W 5.00% TA52
R952	0RD1801H609	1.8K OHM 1/2 W 5.00% TA52	R1455	0RD1001F609	1K OHM 1/6 W 5.00% TA52
R953	0RD0102H609	10 OHM 1/2 W 5.00% TA52	R1456	0RD1801F609	1.8K OHM 1/6 W 5.00% TA52
R954	0RD0271H609	2.7 OHM 1/2 W 5.00% TA52	R1457	0RD6201F609	6.2K OHM 1/6 W 5.00% TA52
R957	0RD1000H609	100 OHM 1/2 W 5.00% TA52	R1459	0RS0470K607	0.47 OHM 2 W 5.00% TA62
R958	0RD1000H609	100 OHM 1/2 W 5.00% TA52	R1460	0RD4700H609	470 OHM 1/2 W 5.00% TA52
R960	ORD3902H609	39K OHM 1/2 W 5.00% TA52	R1461	0RD1000F609	100 OHM 1/6 W 5.00% TA52
R961	ORD3902H609	39K OHM 1/2 W 5.00% TA52	R2001	0RS2200K607	220 OHM 2 W 5.00% TA62
R963	0RS1800J607	180 OHM 1 W 5.00% TA62	R2002	0RS0391K607	3.9 OHM 2 W 5.00% TA62
R964	0RD0472F609	47 OHM 1/6 W 5.00% TA52	R2003	0RS0561K607	5.6 OHM 2 W 5.00% TA62
R970	0RD0271H609	2.7 OHM 1/2 W 5.00% TA52	R2004	0RS2200K607	220 OHM 2 W 5.00% TA62
R971	0RD1801H609	1.8K OHM 1/2 W 5.00% TA52	R2005	0RS0391K607	3.9 OHM 2 W 5.00% TA62
R972	0RD1801H609	1.8K OHM 1/2 W 5.00% TA52	R2006	0RS0561K607	5.6 OHM 2 W 5.00% TA62
R973	0RD0102H609	10 OHM 1/2 W 5.00% TA52	R2007	0RS2200K607	220 OHM 2 W 5.00% TA62
R974	0RD0271H609	2.7 OHM 1/2 W 5.00% TA52	R2008	0RS0391K607	3.9 OHM 2 W 5.00% TA62
R977	0RD1000H609	100 OHM 1/2 W 5.00% TA52	R2009	0RS0561K607	5.6 OHM 2 W 5.00% TA62
R978	0RD1000H609	100 OHM 1/2 W 5.00% TA52	R2010	0RS2200K607	220 OHM 2 W 5.00% TA62
R980	ORD3902H609	39K OHM 1/2 W 5.00% TA52	R2011	0RS0391K607	3.9 OHM 2 W 5.00% TA62
R981	ORD3902H609	39K OHM 1/2 W 5.00% TA52	R2012	0RS0561K607	5.6 OHM 2 W 5.00% TA62
R983	0RS1800J607	180 OHM 1 W 5.00% TA62	R2013	0RS2200K607	220 OHM 2 W 5.00% TA62
R1001	ORD2403F609	240K OHM 1/6 W 5.00% TA52	R2014	0RS0391K607	3.9 OHM 2 W 5.00% TA62
R1002	ORD2403F609	240K OHM 1/6 W 5.00% TA52	R2015	0RS0561K607	5.6 OHM 2 W 5.00% TA62
R1003	ORD0752F609	75 OHM 1/6 W 5.00% TA52	R2016	0RS2200K607	220 OHM 2 W 5.00% TA62
R1004	ORD0752F609	75 OHM 1/6 W 5.00% TA52	R2017	0RS0561K607	5.6 OHM 2 W 5.00% TA62

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic	RD : Carbon Film
	CQ : Polyester	RS : Metal Oxide Film
	CE : Electrolytic	RN : Metal Film





LOCA. NO	PART NO	DESCRIPTION	LOCA. NO	PART NO	DESCRIPTION	
R2018	0RS0391K607	3.9 OHM 2 W 5.00% TA62	SG903G	6918VAX002A	SPARK GAP,SSA-351N-A1 350V 30% 5MM	
R2021	0RD3301F609	3.3K OHM 1/6 W 5.00% TA52	SG903R	6918VAX002A	SPARK GAP,SSA-351N-A1 350V 30% 5MM	
R2023	0RD3301F609	3.3K OHM 1/6 W 5.00% TA52	SWITCH			
R2025	0RD3301F609	3.3K OHM 1/6 W 5.00% TA52	SW701	140-191A	SWITCH,TACT KHH15910	
R2027	0RD3301F609	3.3K OHM 1/6 W 5.00% TA52	SW702	140-191A	SWITCH,TACT KHH15910	
R2029	0RD3301F609	3.3K OHM 1/6 W 5.00% TA52	SW703	140-191A	SWITCH,TACT KHH15910	
R2031	0RD3301F609	3.3K OHM 1/6 W 5.00% TA52	SW704	140-191A	SWITCH,TACT KHH15910	
R2039	0RS0561K607	5.6 OHM 2 W 5.00% TA62	SW705	140-191A	SWITCH,TACT KHH15910	
R2041	0RD2702F609	27K OHM 1/6 W 5.00% TA52	SW706	140-191A	SWITCH,TACT KHH15910	
R2042	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52	SW707	140-191A	SWITCH,TACT KHH15910	
R2043	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52	SW708	140-191A	SWITCH,TACT KHH15910	
R2044	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52	SW801S	140-289A	SWITCH,PUSH POWER SDDF3PASP013	
R2045	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52	CRYSTAL & FILTER			
R2046	0RD4702F609	47K OHM 1/6 W 5.00% TA52	F001	125-022K	FILTER,FERRITE 1UH TAPING	
R2047	0RD4702F609	47K OHM 1/6 W 5.00% TA52	F002	6210VC0005A	FILTER,BK2125 HS 750 TAIYOYUDEN 2X1.2	
R2048	0RD4702F609	47K OHM 1/6 W 5.00% TA52	F003	6210VC0005A	FILTER,BK2125 HS 750 TAIYOYUDEN 2X1.2	
R2051	0RD2702F609	27K OHM 1/6 W 5.00% TA52	F201	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2052	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52	F202	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2053	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52	F203	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2054	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52	F204	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2055	0RD2701F609	2.7K OHM 1/6 W 5.00% TA52	F205	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2056	0RD4702F609	47K OHM 1/6 W 5.00% TA52	F206	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2057	0RD4702F609	47K OHM 1/6 W 5.00% TA52	F207	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2057	0RN1001G509	1K OHM 1/4 W 2.00% TA52	F208	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2058	0RD4702F609	47K OHM 1/6 W 5.00% TA52	F209	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2061	0RS2200K607	220 OHM 2 W 5.00% TA62	F210	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2062	0RS2200K607	220 OHM 2 W 5.00% TA62	F211	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2063	0RS2200K607	220 OHM 2 W 5.00% TA62	F212	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R	
R2064	0RS2200K607	220 OHM 2 W 5.00% TA62	F501	166-F01G	FILTER,DSS6NZ82A103Q93A DSS306-93FZ10	
R2065	0RS2200K607	220 OHM 2 W 5.00% TA62	F702	166-F01G	FILTER,DSS6NZ82A103Q93A DSS306-93FZ10	
R2066	0RS2200K607	220 OHM 2 W 5.00% TA62	F703	166-F01G	FILTER,DSS6NZ82A103Q93A DSS306-93FZ10	
R2091	0RS0561K607	5.6 OHM 2 W 5.00% TA62	F704	166-F01G	FILTER,DSS6NZ82A103Q93A DSS306-93FZ10	
R2092	0RS0561K607	5.6 OHM 2 W 5.00% TA62	F801	6210VC0003A	FILTER,HF50ACC321611 TDK-JAP 32MM R/T	
R2095	0RF0470K607	0.47 OHM 2 W 5.00% TA62	F802	6210VC0003A	FILTER,HF50ACC321611 TDK-JAP 32MM R/T	
R2096	0RF0470K607	0.47 OHM 2 W 5.00% TA62	F831	125-123A	FILTER,FERRITE BFD3565R2F(TAPING)	
R2807	0RD1001F609	1K OHM 1/6 W 5.00% TA52	F833	125-123A	FILTER,FERRITE BFD3565R2F(TAPING)	
ZD891	0RD1001F609	1K OHM 1/6 W 5.00% TA52	F841	125-022K	FILTER,FERRITE 1UH TAPING	
RP801	0RD0331H609	3.3 OHM 1/2 W 5.00% TA52	F843	125-022K	FILTER,FERRITE 1UH TAPING	
RP802	0RD0152H609	15 OHM 1/2 W 5.00% TA52	F851	125-022K	FILTER,FERRITE 1UH TAPING	
RP810	0RD4701F609	4.7K OHM 1/6 W 5.00% TA52	FB401	125-022K	FILTER,FERRITE 1UH TAPING	
VR401	180-F03H	EVN-DJAA03 B103 SEMI-FIX(H) TA	FB402	125-022K	FILTER,FERRITE 1UH TAPING	
SPARK GAP			FB404	125-022K	FILTER,FERRITE 1UH TAPING	
SG302	6918VAX002B	SPARK GAP,SSA-102N-A1 1000V 30% 5MM	FB801	125-022K	FILTER,FERRITE 1UH TAPING	
SG303	6918VAX002B	SPARK GAP,SSA-102N-A1 1000V 30% 5MM	FB802	125-022K	FILTER,FERRITE 1UH TAPING	
SG901B	6918VAX002D	SPARK GAP,WSP-301M 300V 20%	FB805	125-022K	FILTER,FERRITE 1UH TAPING	
SG901G	6918VAX002D	SPARK GAP,WSP-301M 300V 20%	FB811	125-022K	FILTER,FERRITE 1UH TAPING	
SG901R	6918VAX002D	SPARK GAP,WSP-301M 300V 20%	FB812	125-022K	FILTER,FERRITE 1UH TAPING	
SG902B	6918VAX002B	SPARK GAP,SSA-102N-A1 1000V 30% 5MM	FB871	125-123A	FILTER,FERRITE BFD3565R2F(TAPING)	
SG902R	6918VAX002B	SPARK GAP,SSA-102N-A1 1000V 30% 5MM	FB901B	125-123A	FILTER,FERRITE BFD3565R2F(TAPING)	
SG902G	6918VAX002B	SPARK GAP,SSA-102N-A1 1000V 30% 5MM	FB901R	125-123A	FILTER,FERRITE BFD3565R2F(TAPING)	
SG903B	6918VAX002A	SPARK GAP,SSA-351N-A1 350V 30% 5MM				

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;	CC, CX, CK, CN : Ceramic	RD : Carbon Film
	CQ : Polyester	RS : Metal Oxide Film
	CE : Electrolytic	RN : Metal Film

LOCA. NO	PART NO	DESCRIPTION
FB901G	125-123A	FILTER,FERRITE BFD3565R2F(TAPING)
FR886	125-022K	FILTER,FERRITE 1UH TAPING
L217	125-022K	FILTER,FERRITE 1UH TAPING
L218	125-022K	FILTER,FERRITE 1UH TAPING
L501	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L503	125-022K	FILTER,FERRITE 1UH TAPING
L505	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L506	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L507	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L508	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L509	6210VC0005A	FILTER,BK2125 HS 750 TAIYOYUDEN 2X1.2
L510	6210VC0005A	FILTER,BK2125 HS 750 TAIYOYUDEN 2X1.2
L511	6210VC0005A	FILTER,BK2125 HS 750 TAIYOYUDEN 2X1.2
L512	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM R
L513	6210VC0005A	FILTER,BK2125 HS 750 TAIYOYUDEN 2X1.2
L514	6210VC0005A	FILTER,BK2125 HS 750 TAIYOYUDEN 2X1.2
L515	6210VC0005A	FILTER,BK2125 HS 750 TAIYOYUDEN 2X1.2
L706	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L710	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L711	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L712	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L713	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L714	6210TCE001G	FILTER,HH-1M3216-501 CERATEC 3216MM
L801S	150-F06Z	FILTER,SQE3535 10MH 0.85PHY 50TURN
L802S	150-F06Z	FILTER,SQE3535 10MH 0.85PHY 50TURN
L802	150-F06Z	FILTER,SQE3535 10MH 0.85PHY 50TURN
L804	150-F06Z	FILTER,SQE3535 10MH 0.85PHY 50TURN
L808	150-F06Z	FILTER,SQE3535 10MH 0.85PHY 50TURN
L2001	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2002	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2003	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2004	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2005	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2006	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2011	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2012	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2013	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2014	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2018	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2021	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2027	125-022K	FILTER,FERRITE 1UH TAPING
L2028	6210TCT002B	FILTER,ACB2012M-300-T TDK
L2030	6210TCT002B	FILTER,ACB2012M-300-T TDK
X001	156-A01L	RESONATOR,CRYSTAL SUNNY RADIAL 6.000MHZ
X201	156-A02M	RESONATOR,CRYSTAL KJE RADIAL 18.432MHZ
X501	6202VDB007B	RESONATOR,CRYSTAL SUNNY RADIAL 20.250MHZ
X702	166-E02E	RESONATOR,CRYSTAL CSBLA500KECF02-B0
X2801	156-A02W	RESONATOR,CRYSTAL HC49U 11059200HZ
Z103	166-F01G	FILTER,EMC DSS6NZ82A103Q93A DSS306-93FZ10
Z106	166-F01G	FILTER,EMC DSS6NZ82A103Q93A DSS306-93FZ10
Z117	166-F01G	FILTER,EMC DSS6NZ82A103Q93A DSS306-93FZ10
Z129	166-F01G	FILTER,EMC DSS6NZ82A103Q93A DSS306-93FZ10

LOCA. NO	PART NO	DESCRIPTION
Z142	166-F01G	FILTER,EMC DSS6NZ82A103Q93A DSS306-93FZ10
ACCESSORIES		
A1	3828VA0288F	MANUAL,OWNERS AP/A83 LG EN 049PTX 395
A2	6710V00049P	REMOTE CONTROLLER
MISCELLANEOUS		
	380-377B	JACK,DIN PJ6024B PARK DIN S/W
	5006V00001A	CAP,MAIN2.V-0 GRADE VARISTOR COV
	6612JV004A	JACK,RCA PPJ119A A/V 6P MONO
	6612JV005A	JACK,RCA PPJ118A A/V 4P MONO
AVJACK	6612JV003A	JACK,RCA PJ6042C-01 A/V 9P WI
F801	0FT5001B51B	FUSE,TIME LAG 5000MA 250V 5.2X20
JA1001	6613V00010B	JACK ASSY,PMJ016B A/V 3P + S-V
PA01P	6726VH0001A	REMOTE CONTROLLER RECEIVER 38KHZ
RL801	141-018F	RELAY,DG5D1-0-2 DAIICHI 5V 0.000106A
SK901	381-226L	SOCKET,CPT PCS628-03L(W/BAND)100K OHM
SK902	381-226L	SOCKET,CPT PCS628-03L(W/BAND)100K OHM
SK903	381-226L	SOCKET,CPT PCS628-03L(W/BAND)100K OHM
TU101	6700VPF011A	TUNER,TAUC-Z140D
TU102	6700VPF011B	TUNER,TAFC-Z140P
VA801	164-003D	VARISTOR,SVC561D-14A 560V 10% UL/
VA802	164-003D	VARISTOR,SVC561D-14A 560V 10% UL/
NT801	163-048D	THERMISTOR,KL15L2R5 +/- 15% 125V
NT802	163-048D	THERMISTOR,KL15L2R5 +/- 15% 125V


CIRCUIT DIAGRAM FOR MP015A CHASSIS

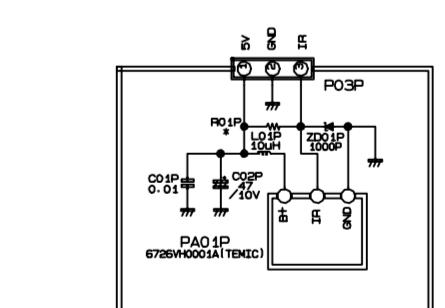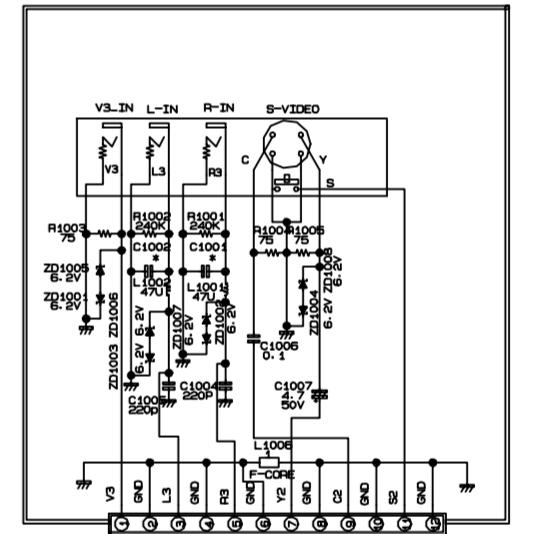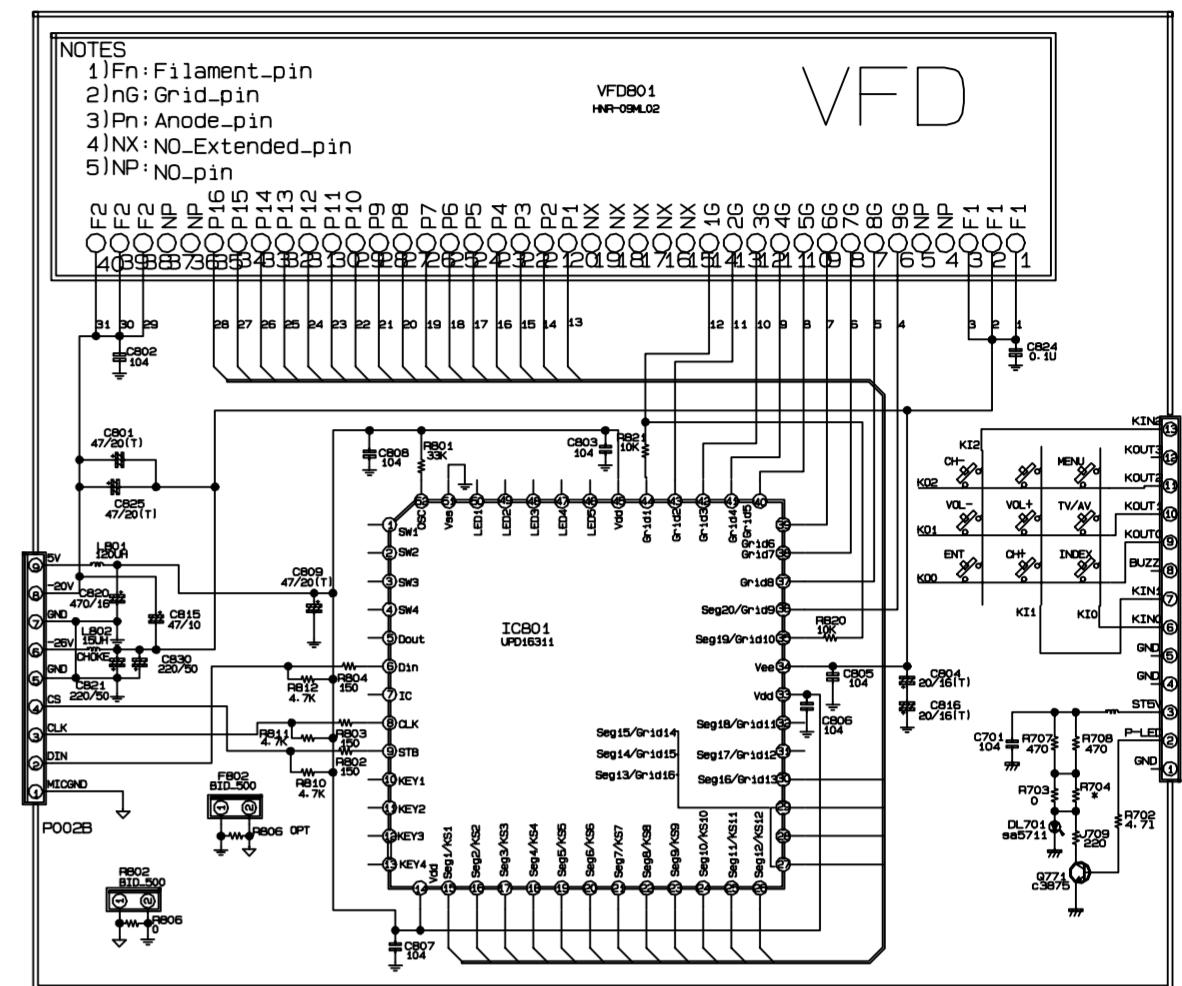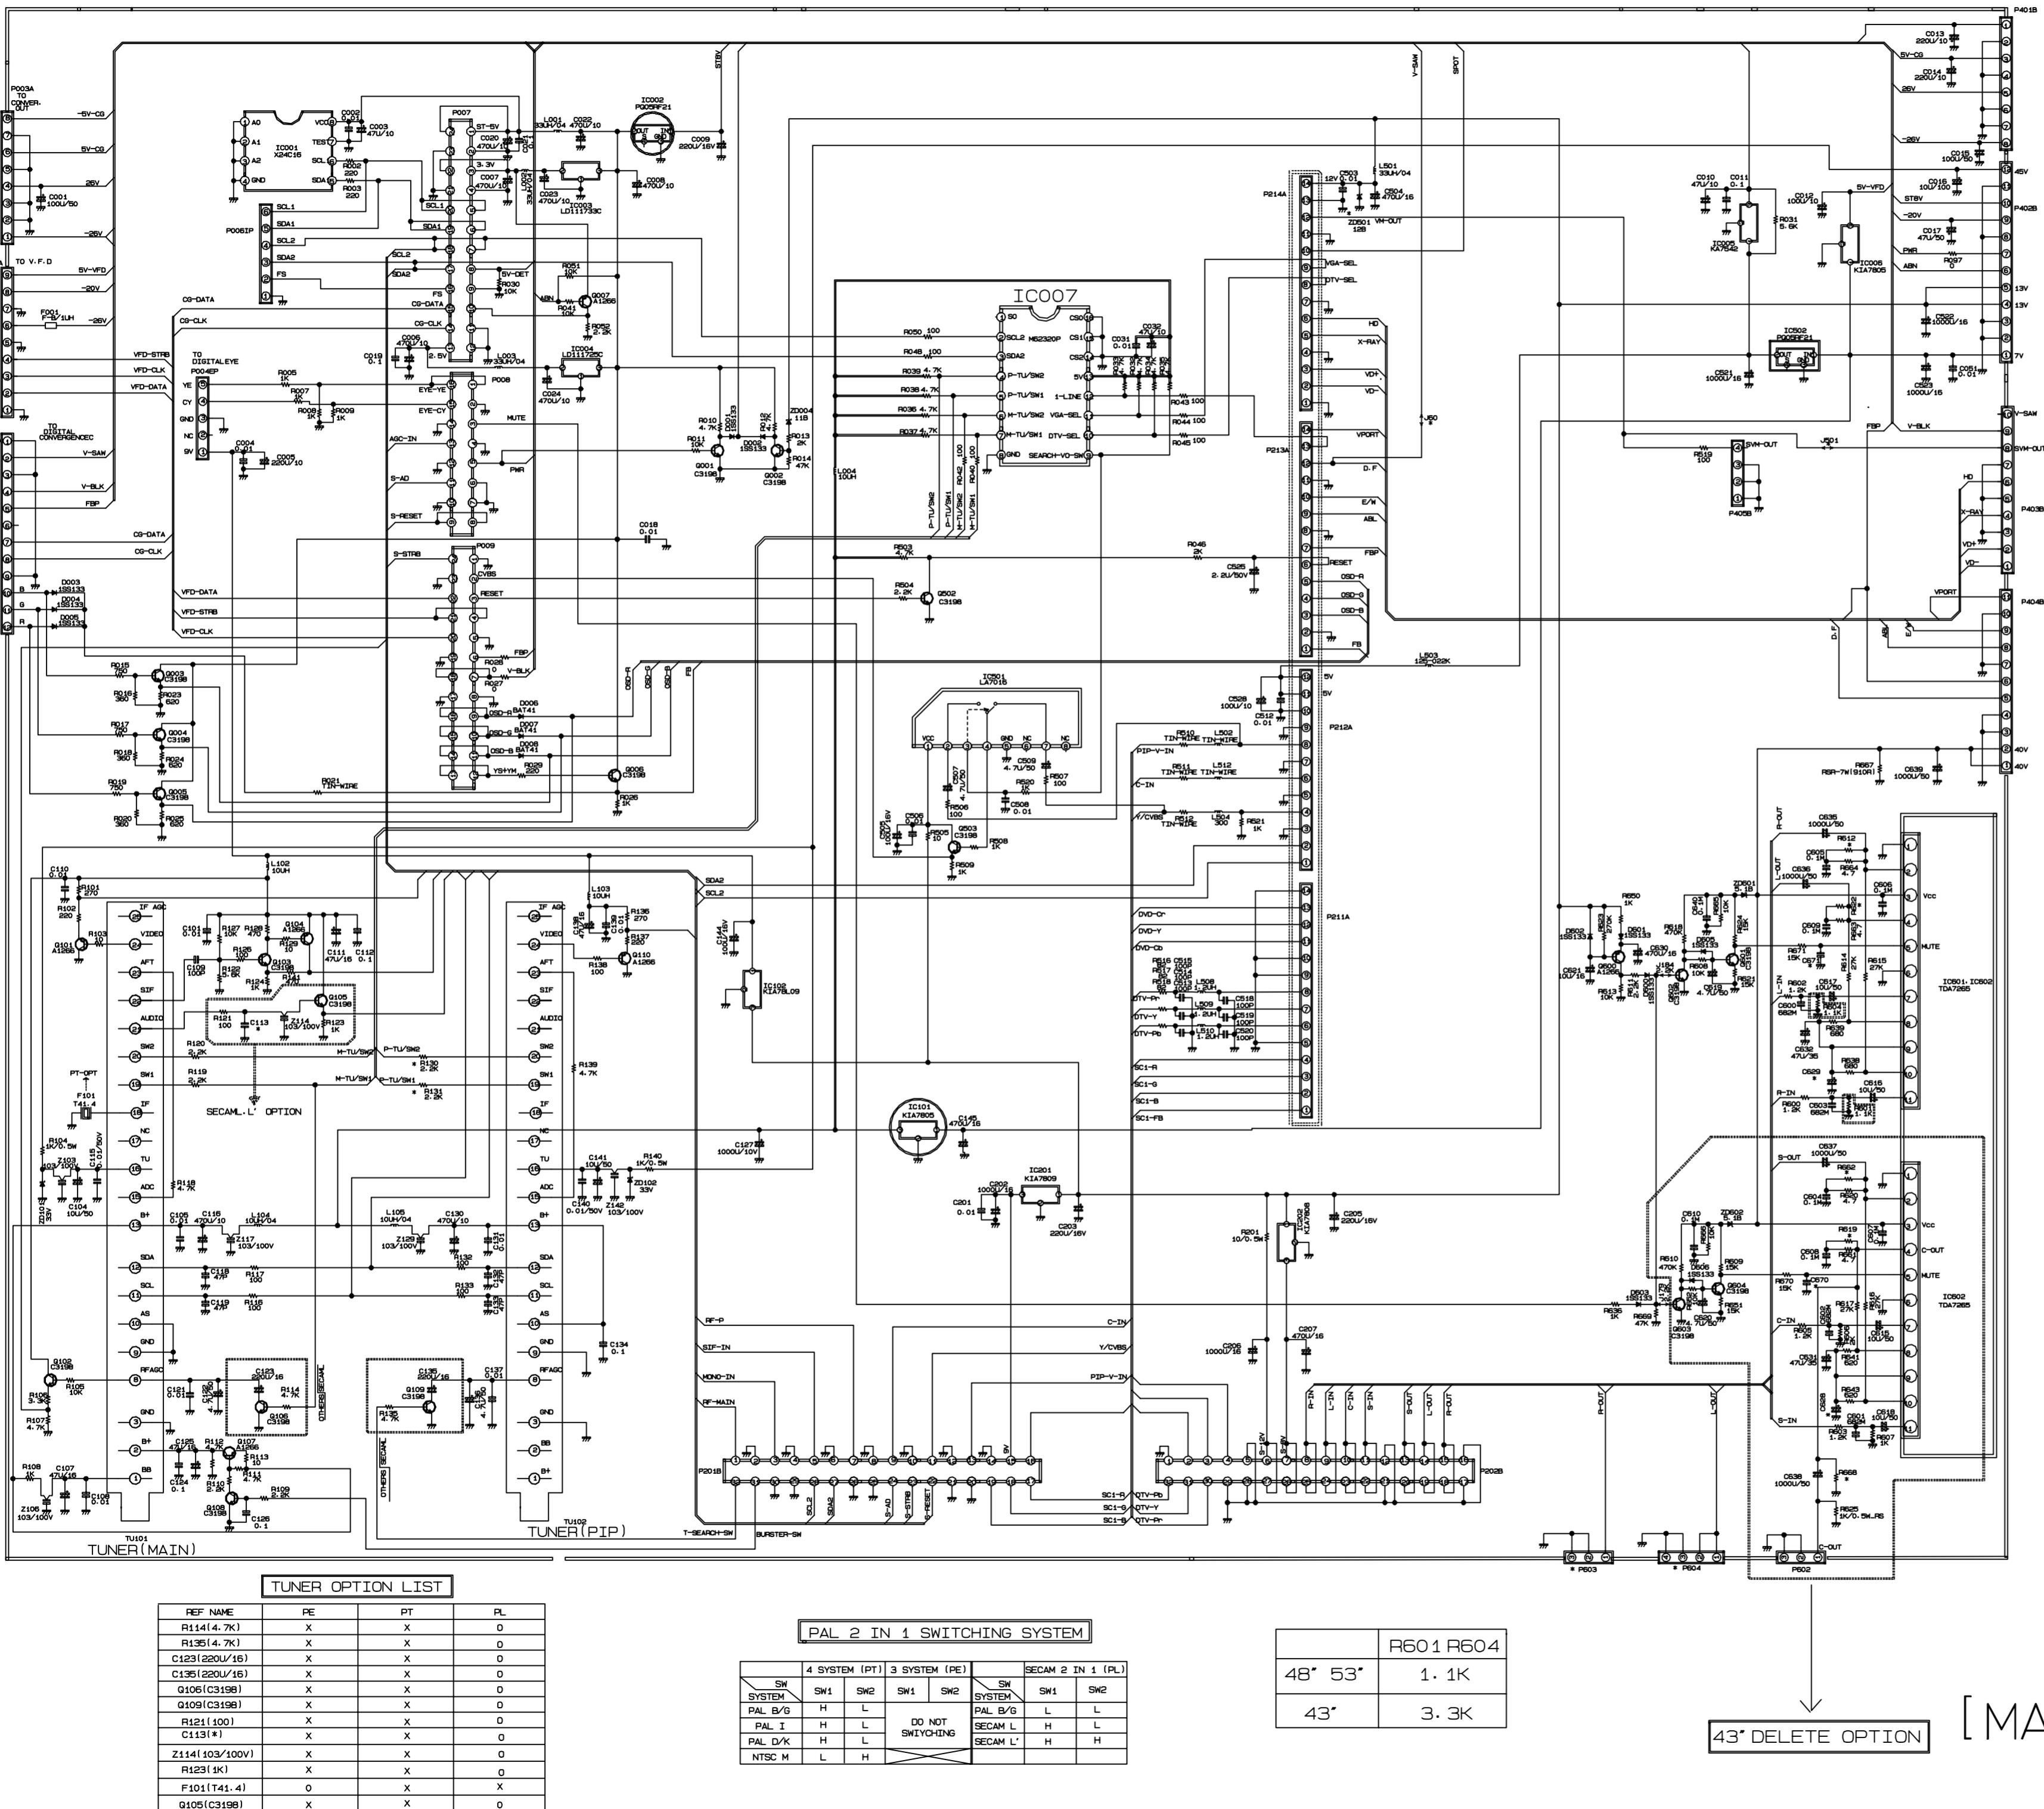







[MAIN, VFD, SIDE-AV, PRE-AMP]

CIRCUIT DIAGRAM FOR MPO15A CHASSIS

[SMPS, DEF, VM, CPT]

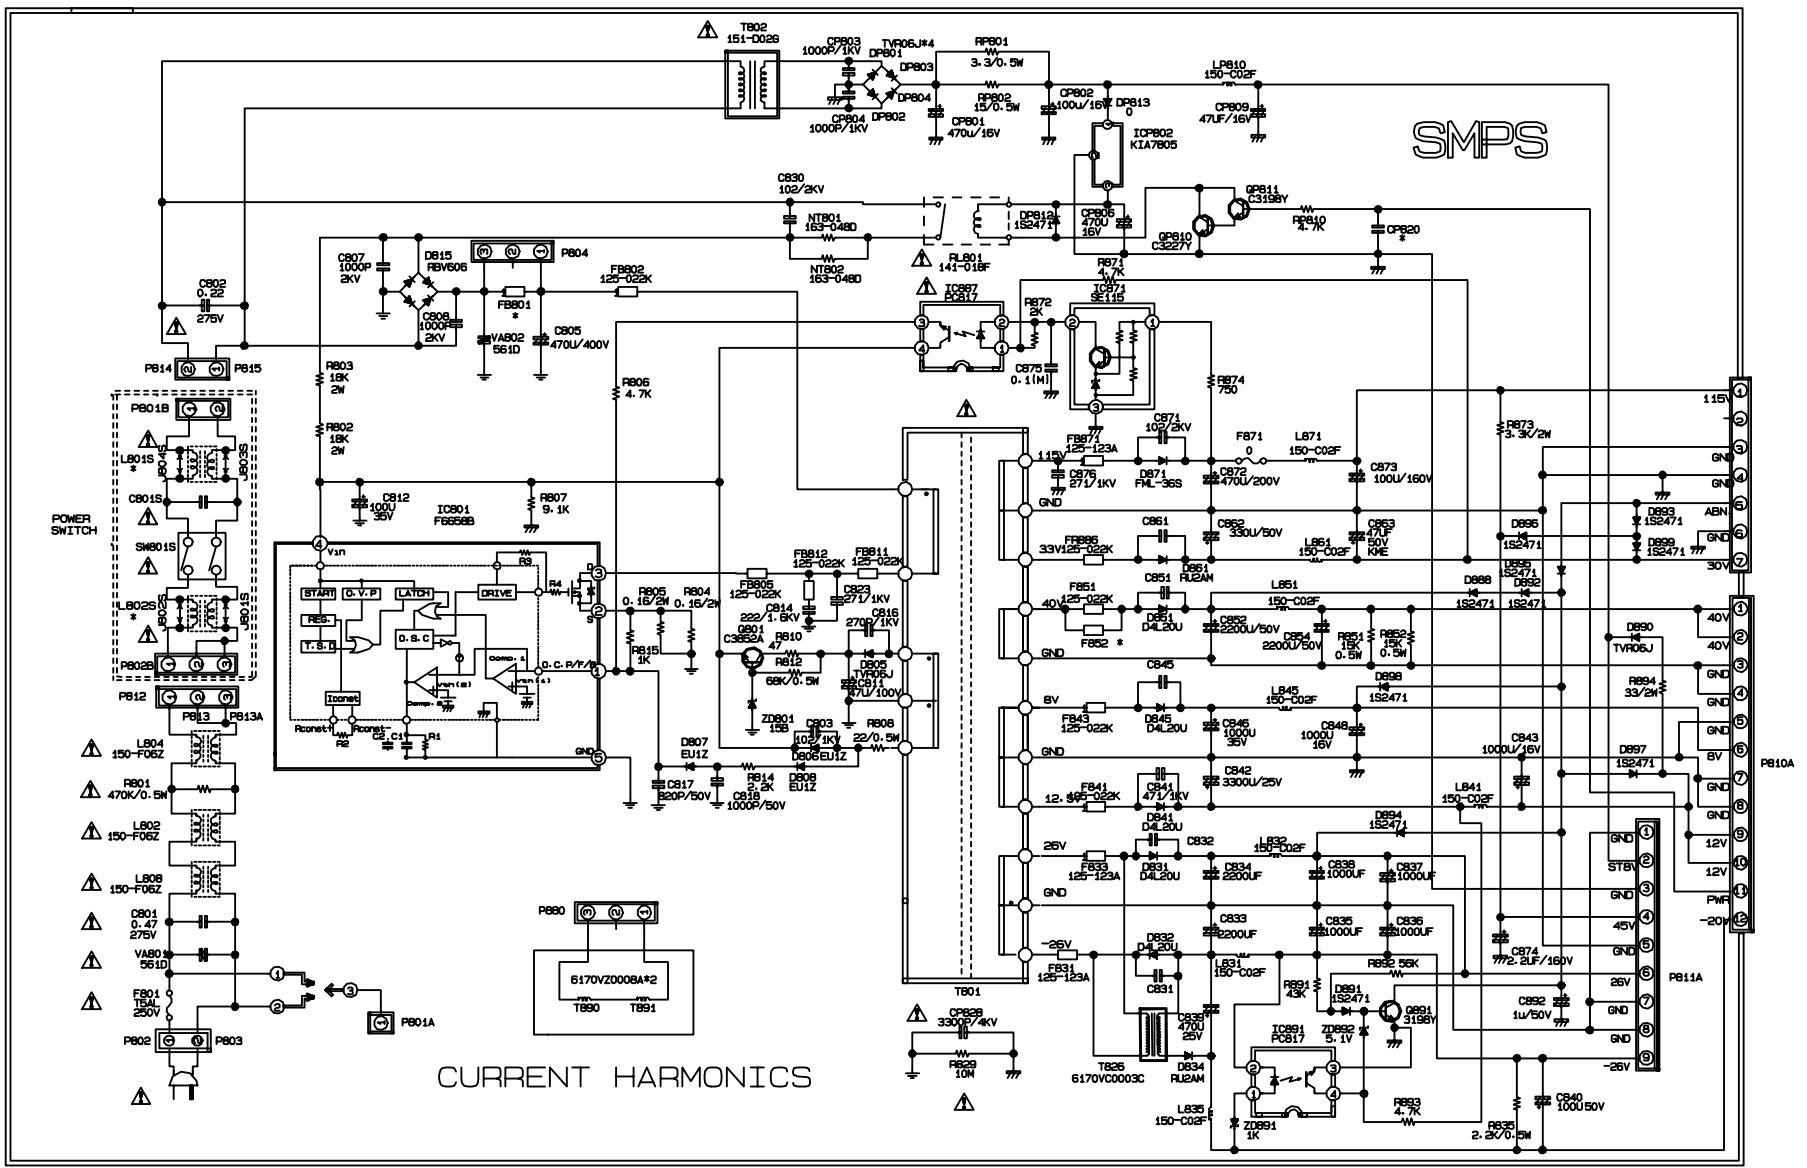


SMPs (WIDE)

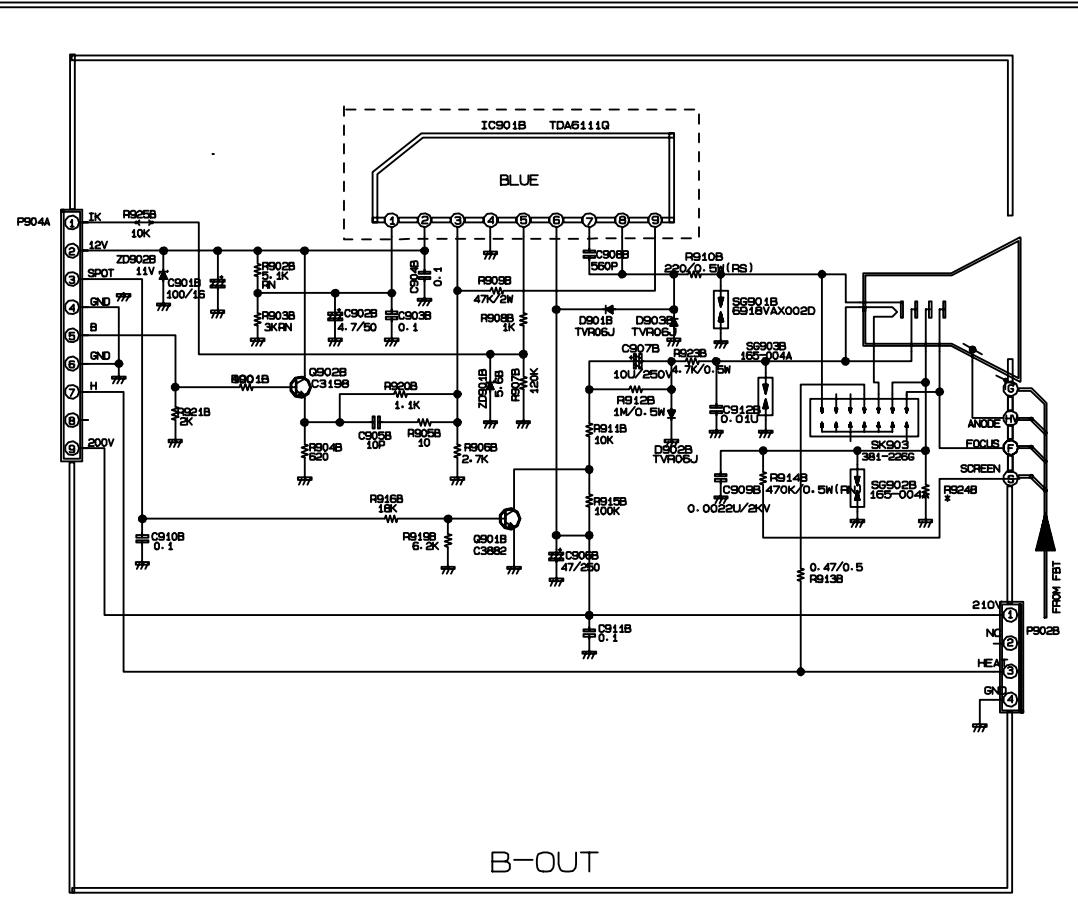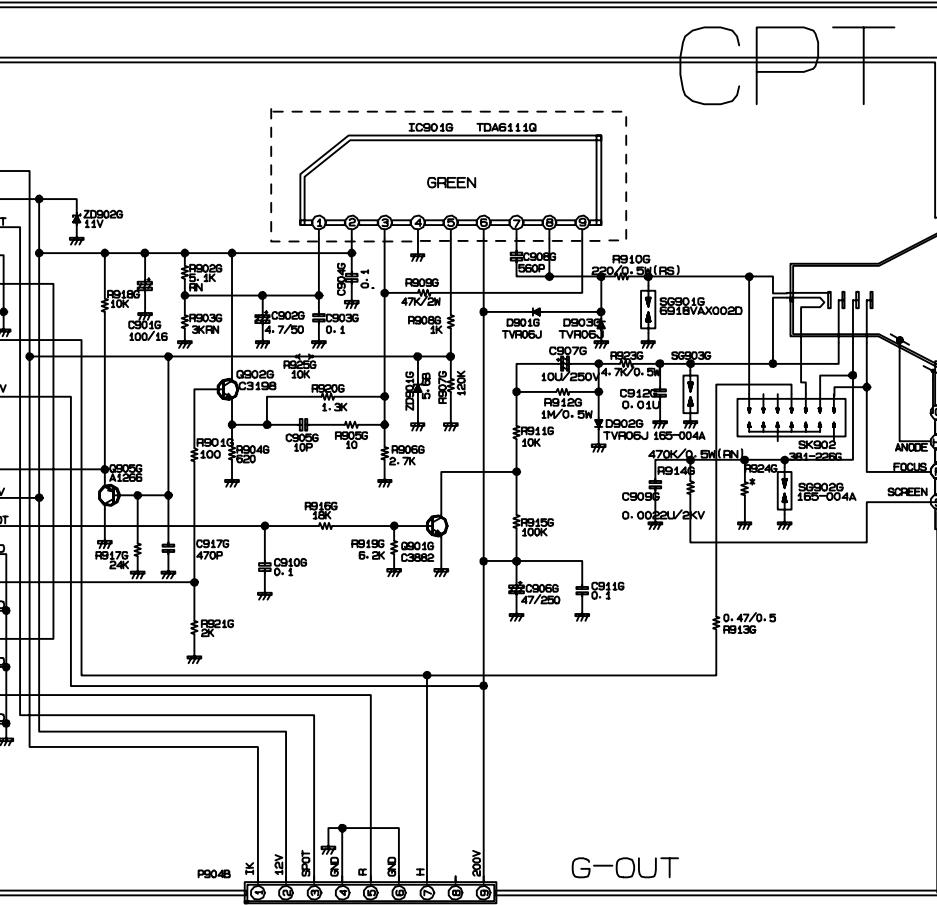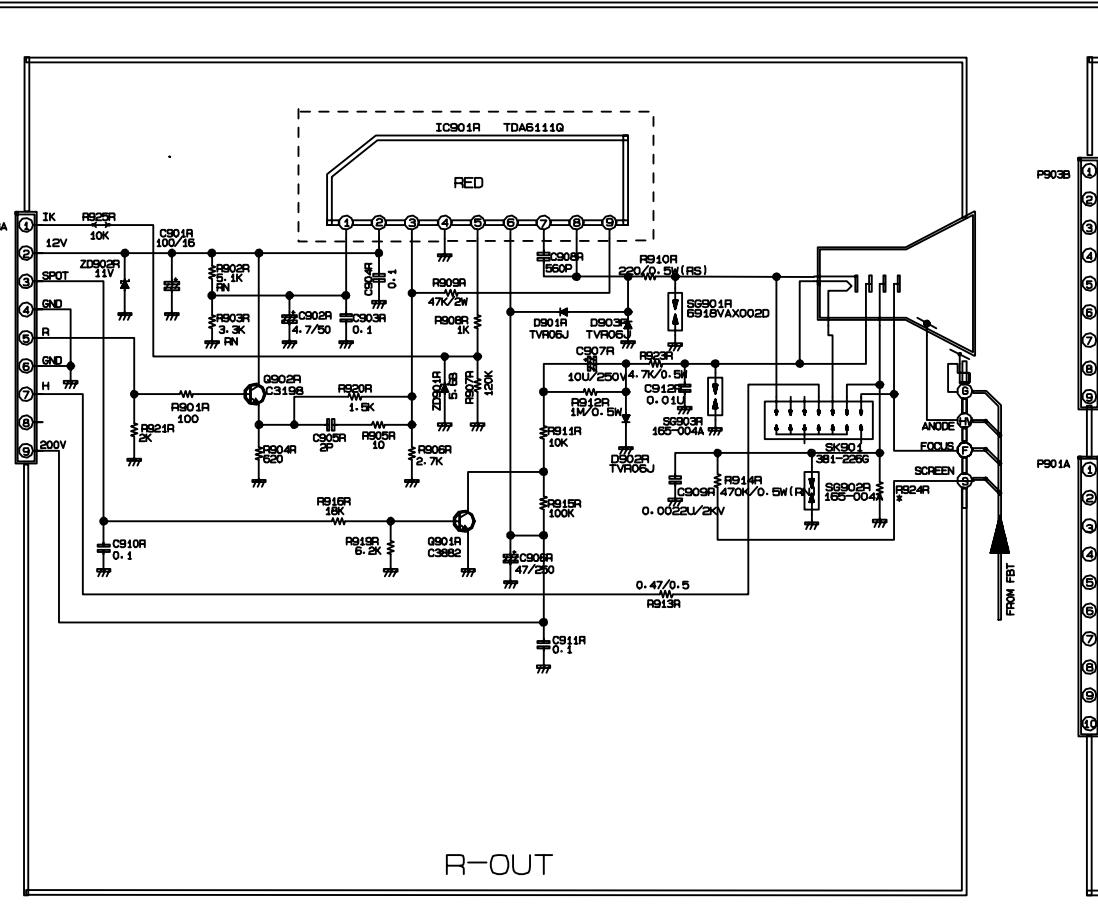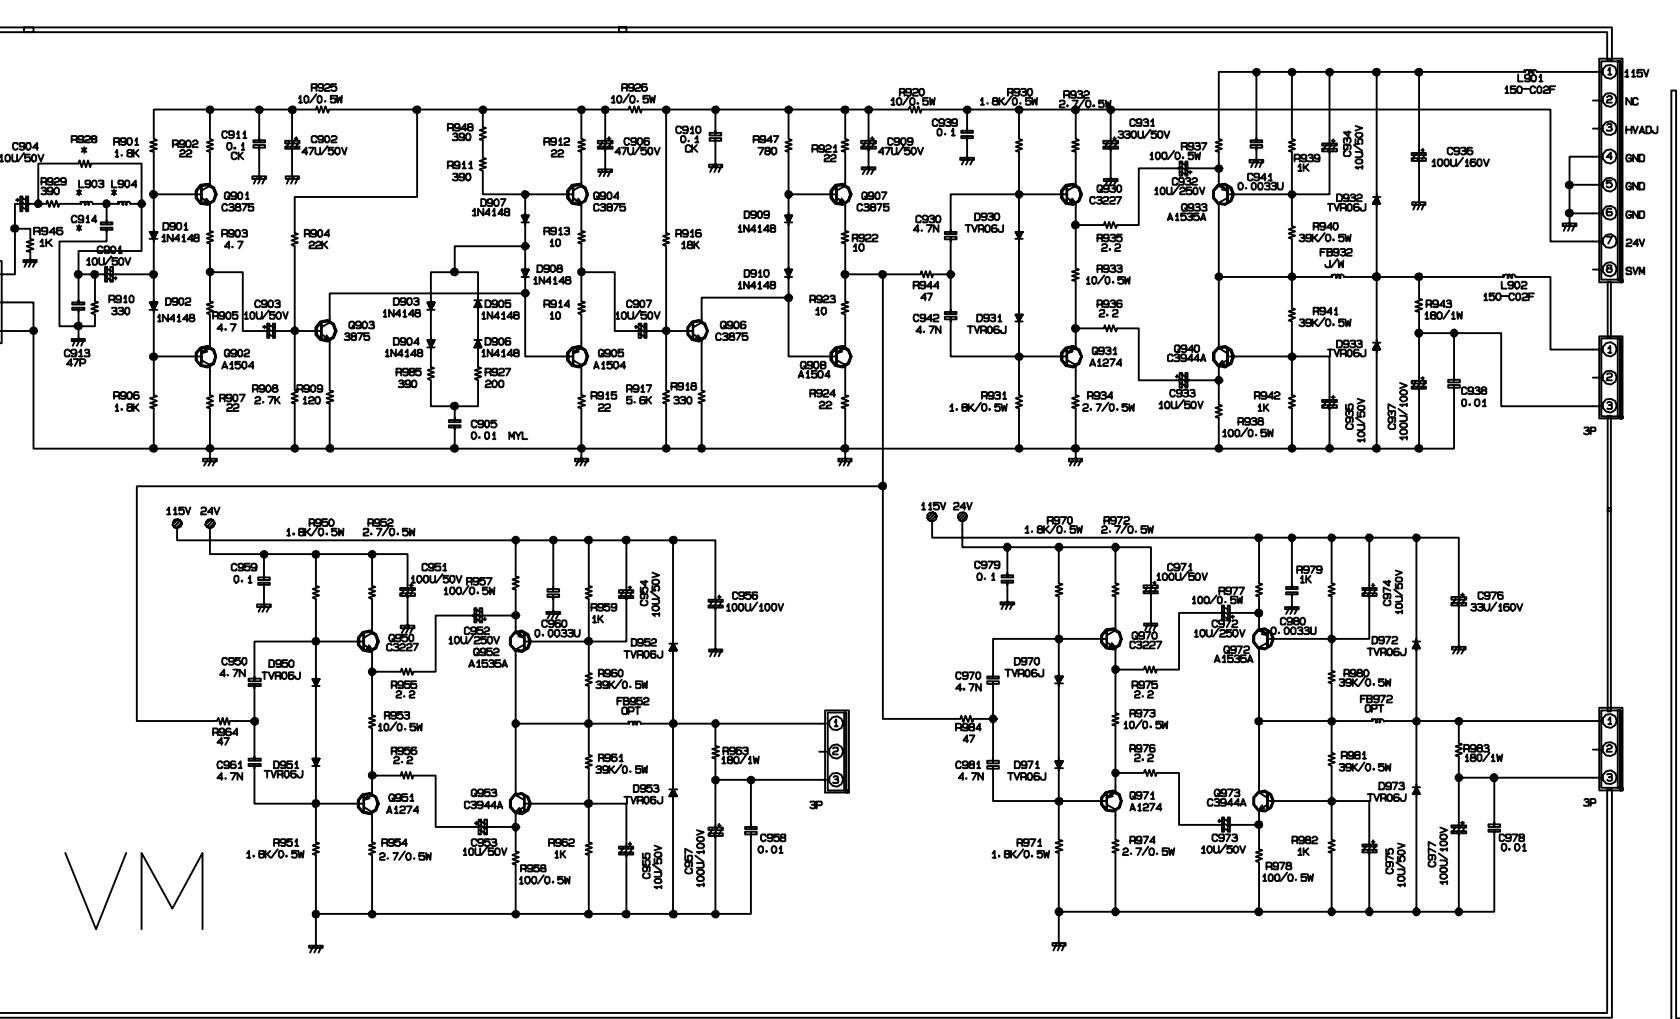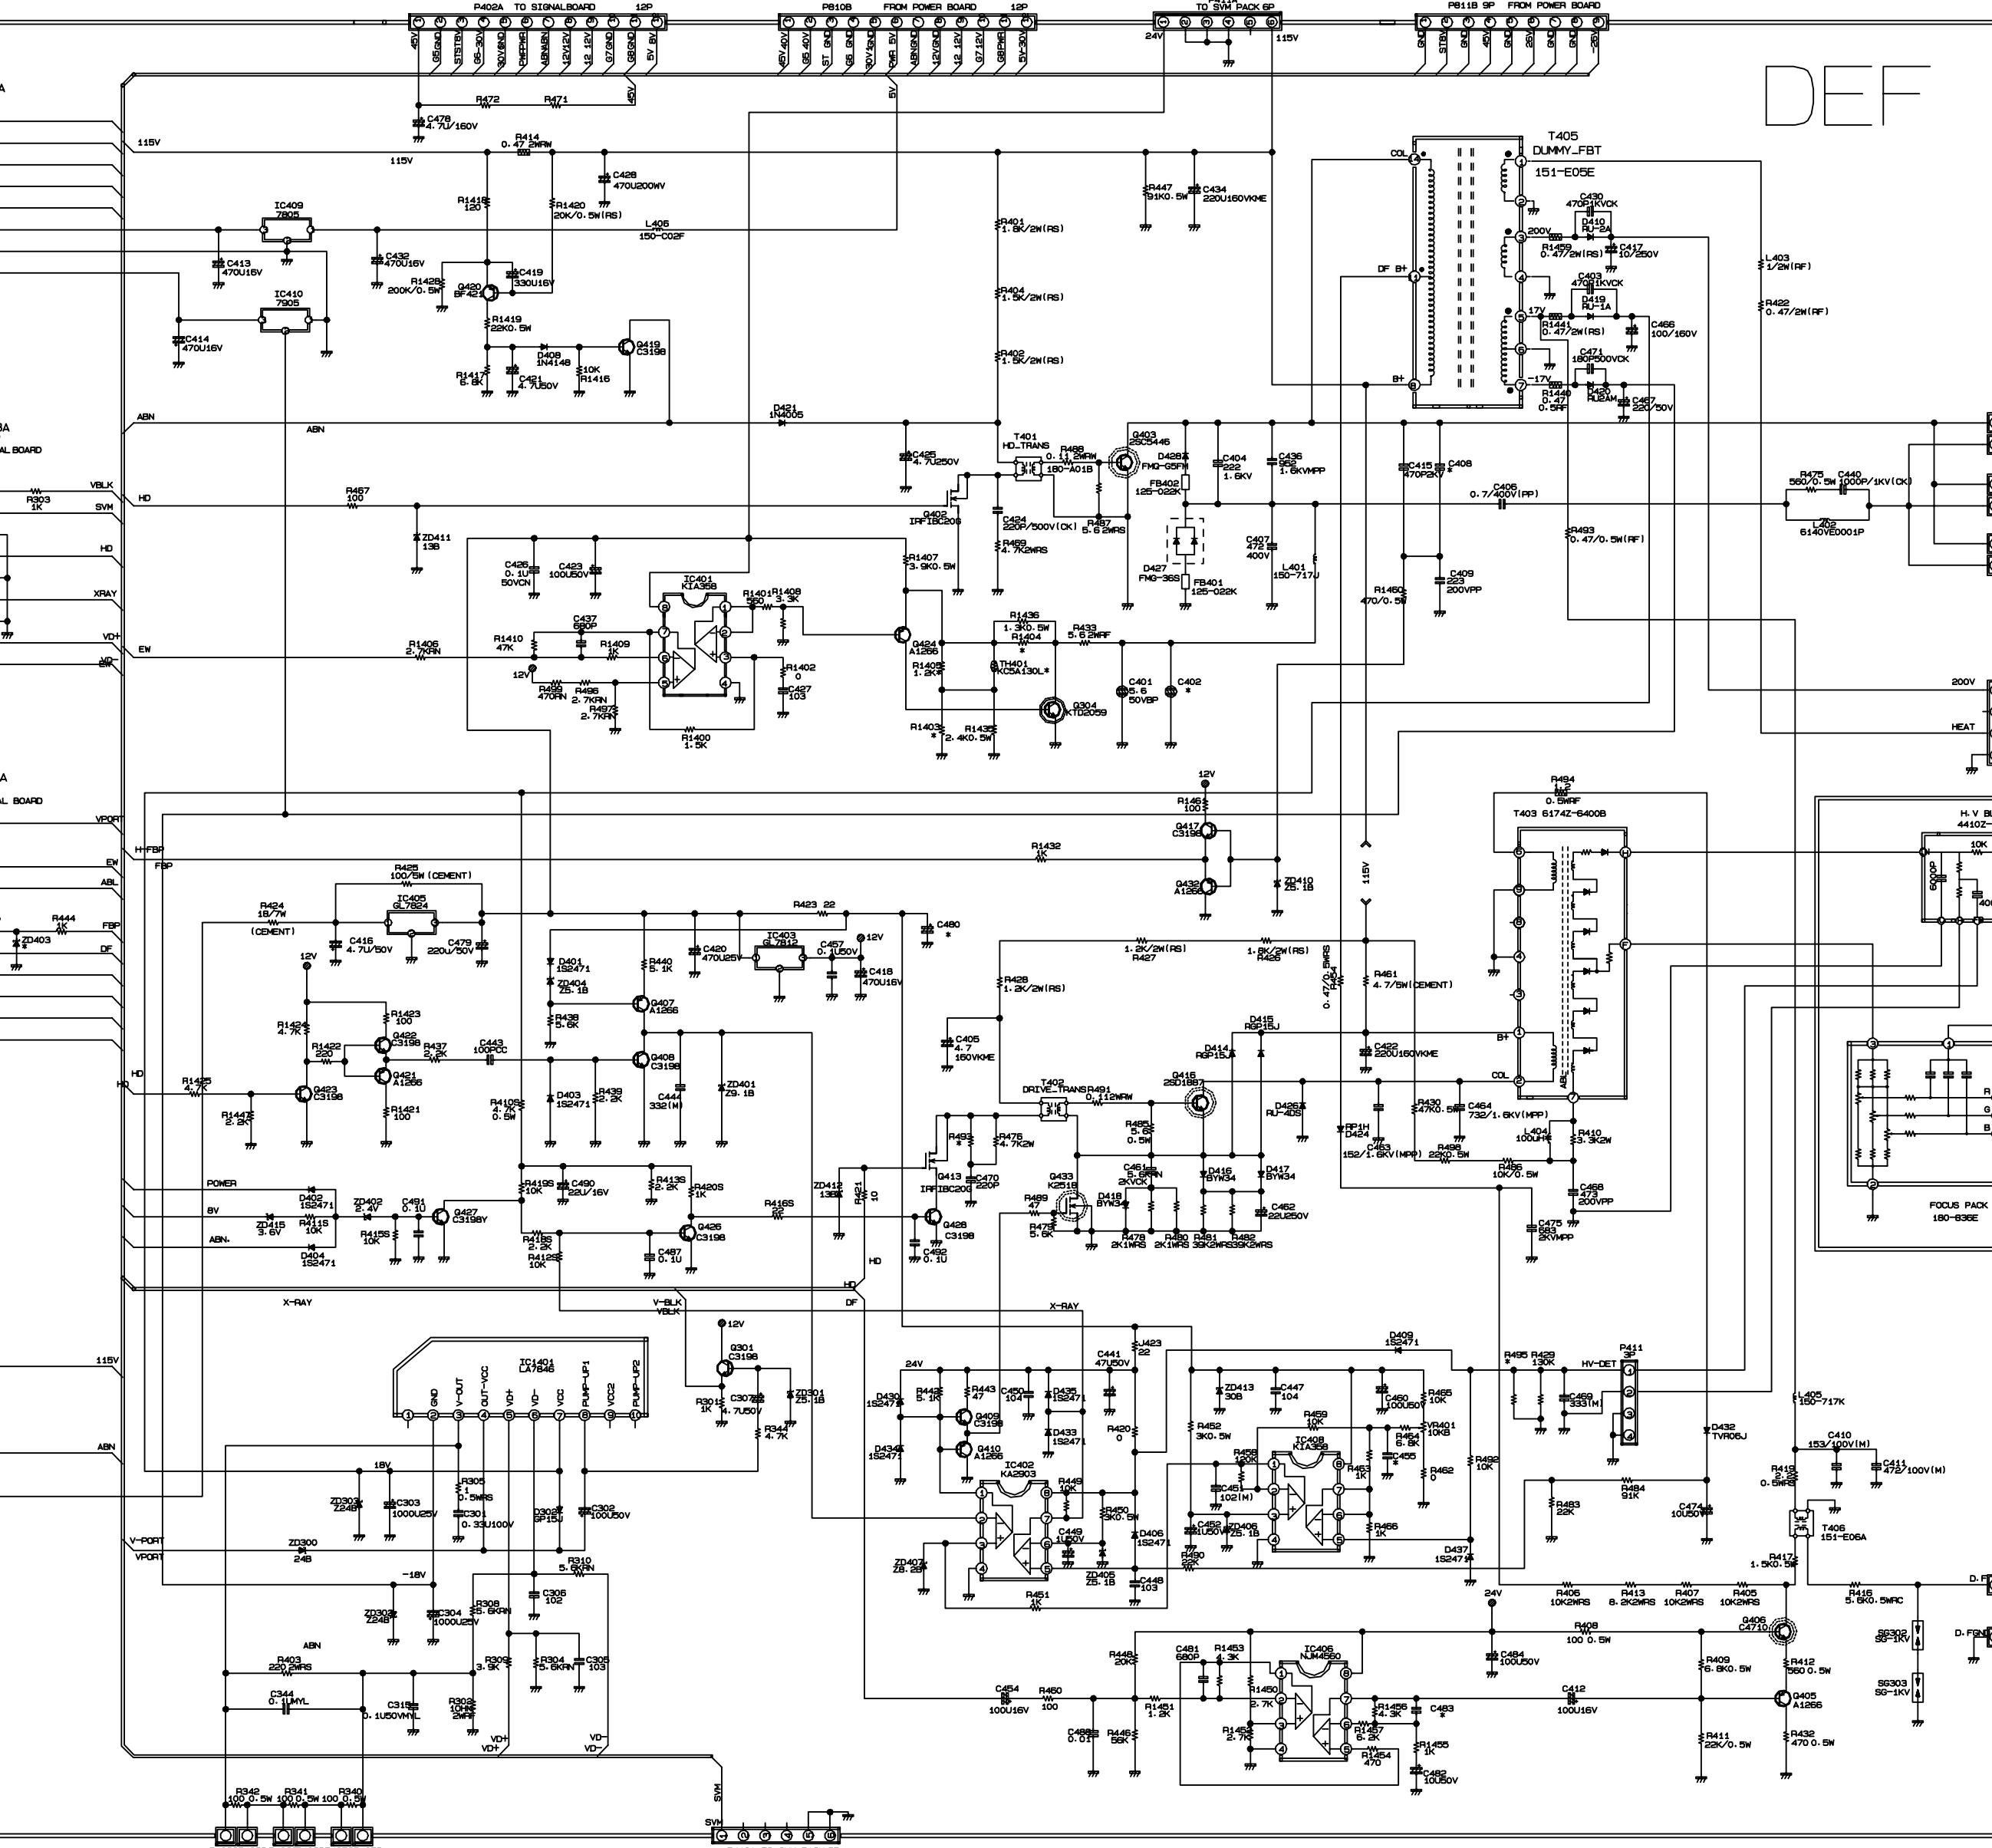
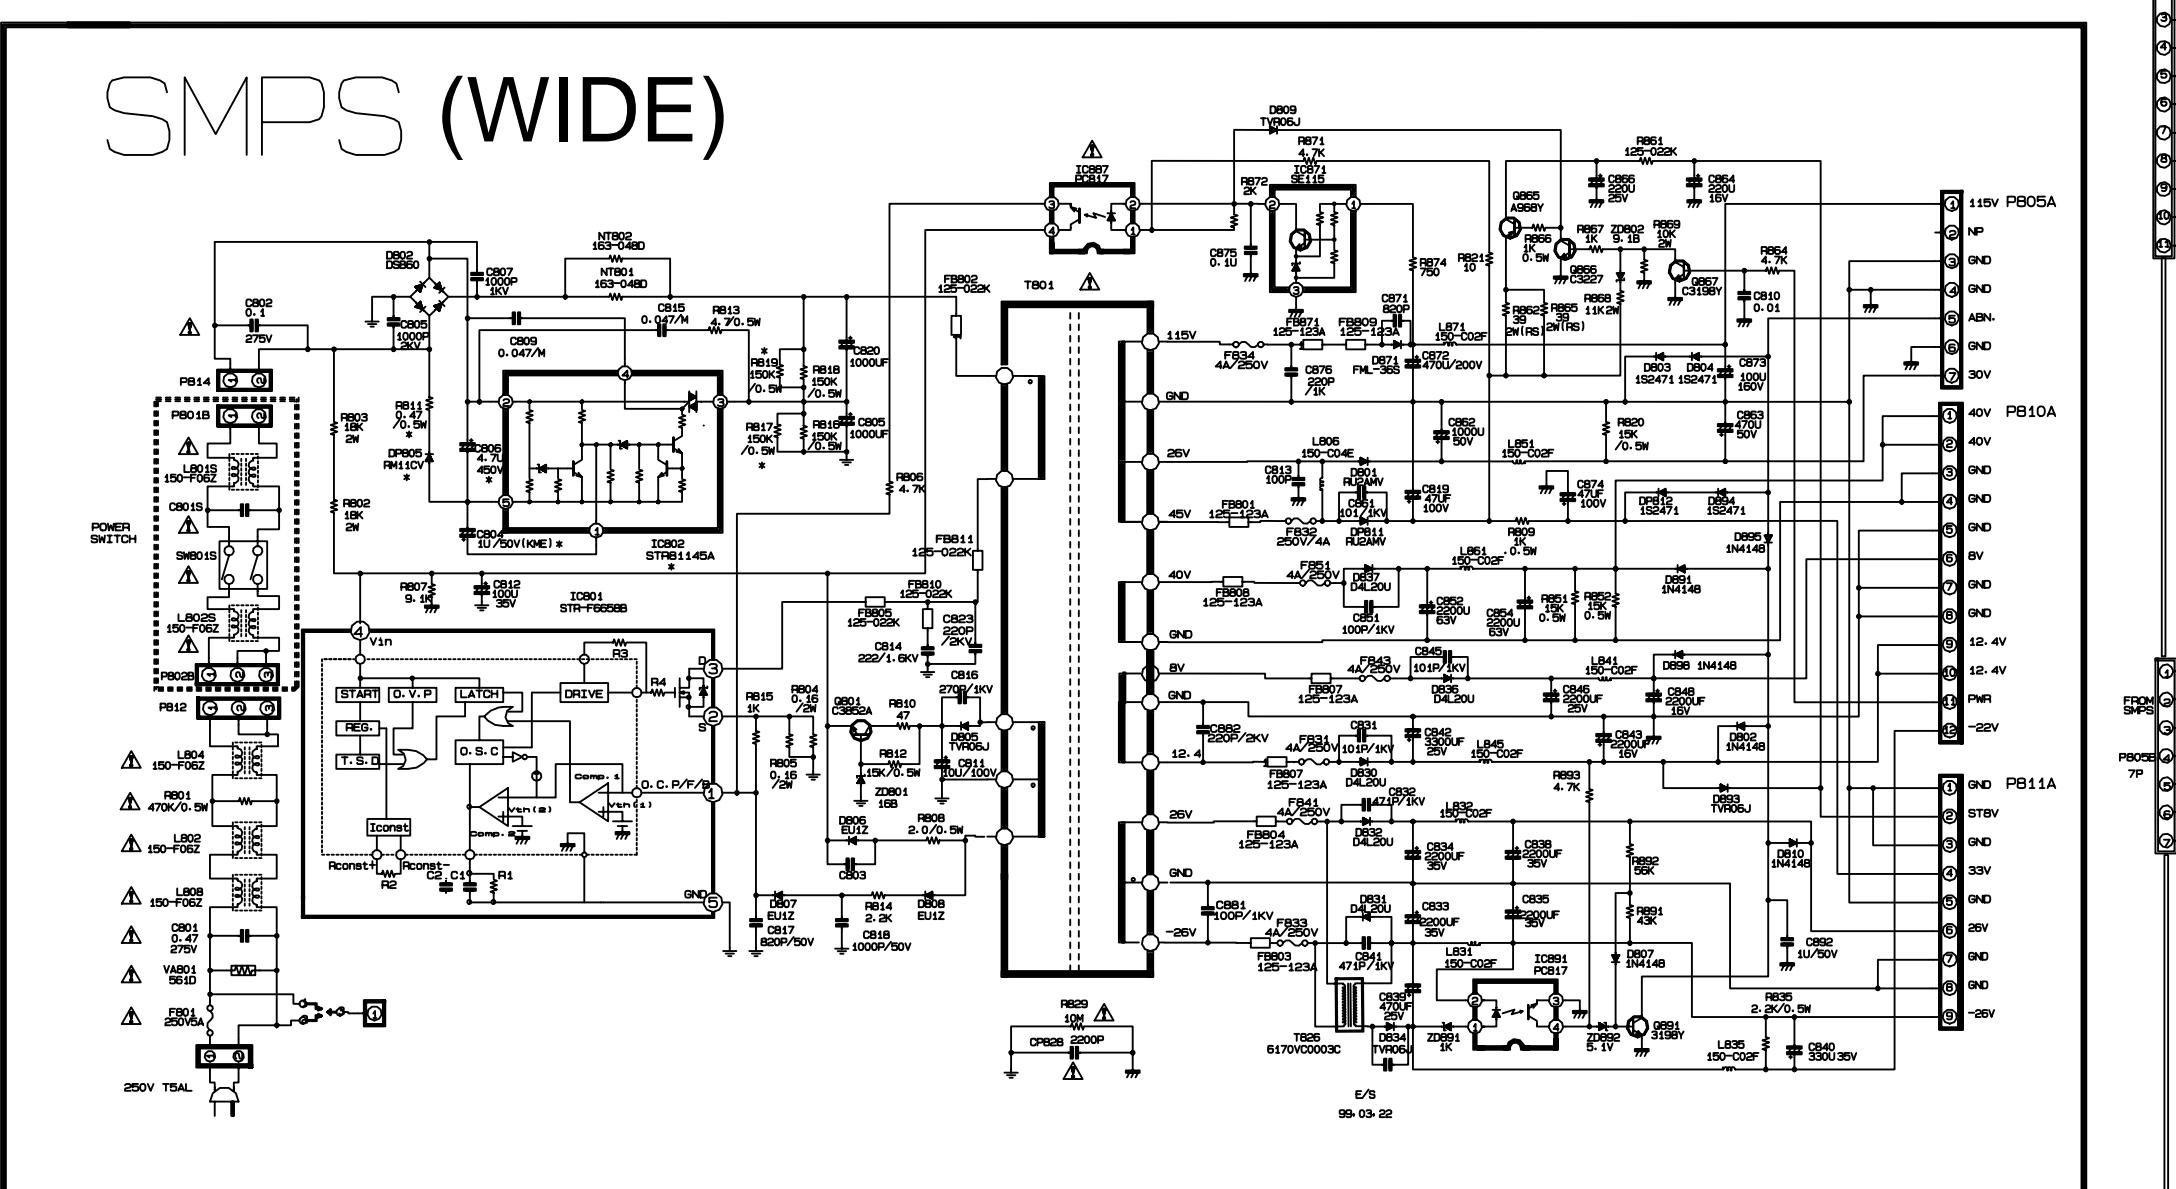


CIRCUIT DIAGRAM FOR MPO15A CHASSIS

MICOM

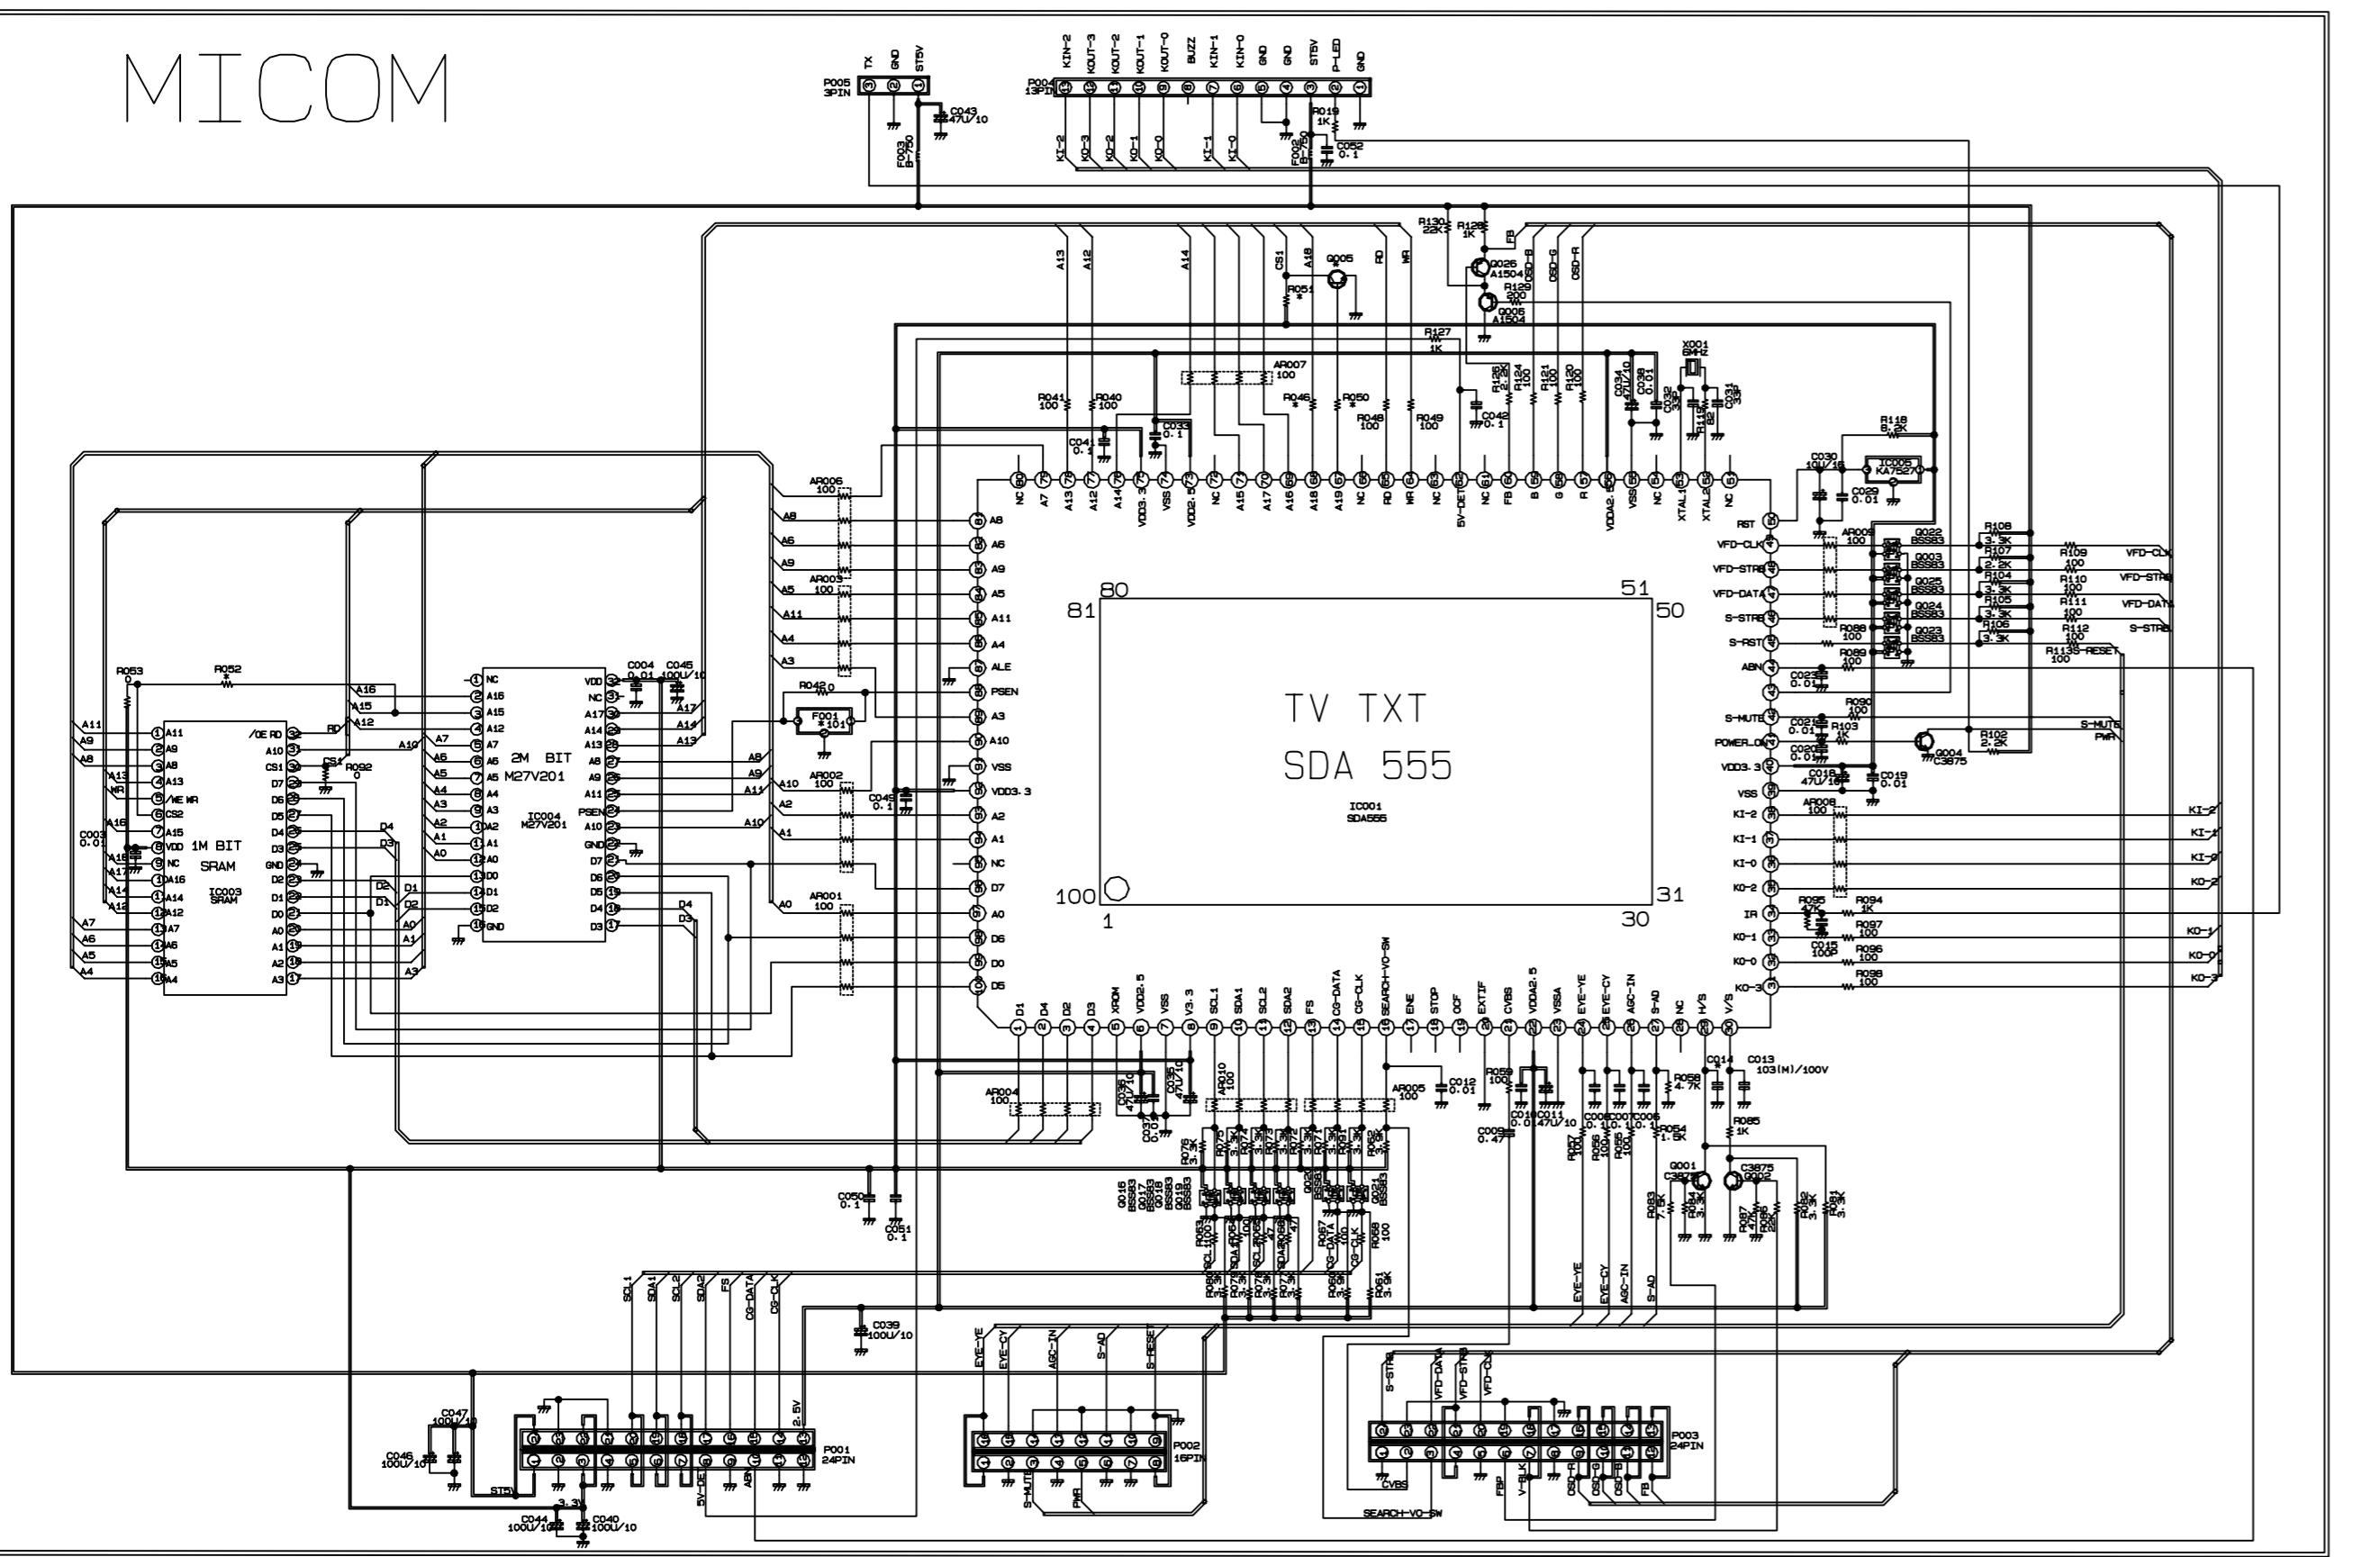



DIGITAL CONVERGENCE

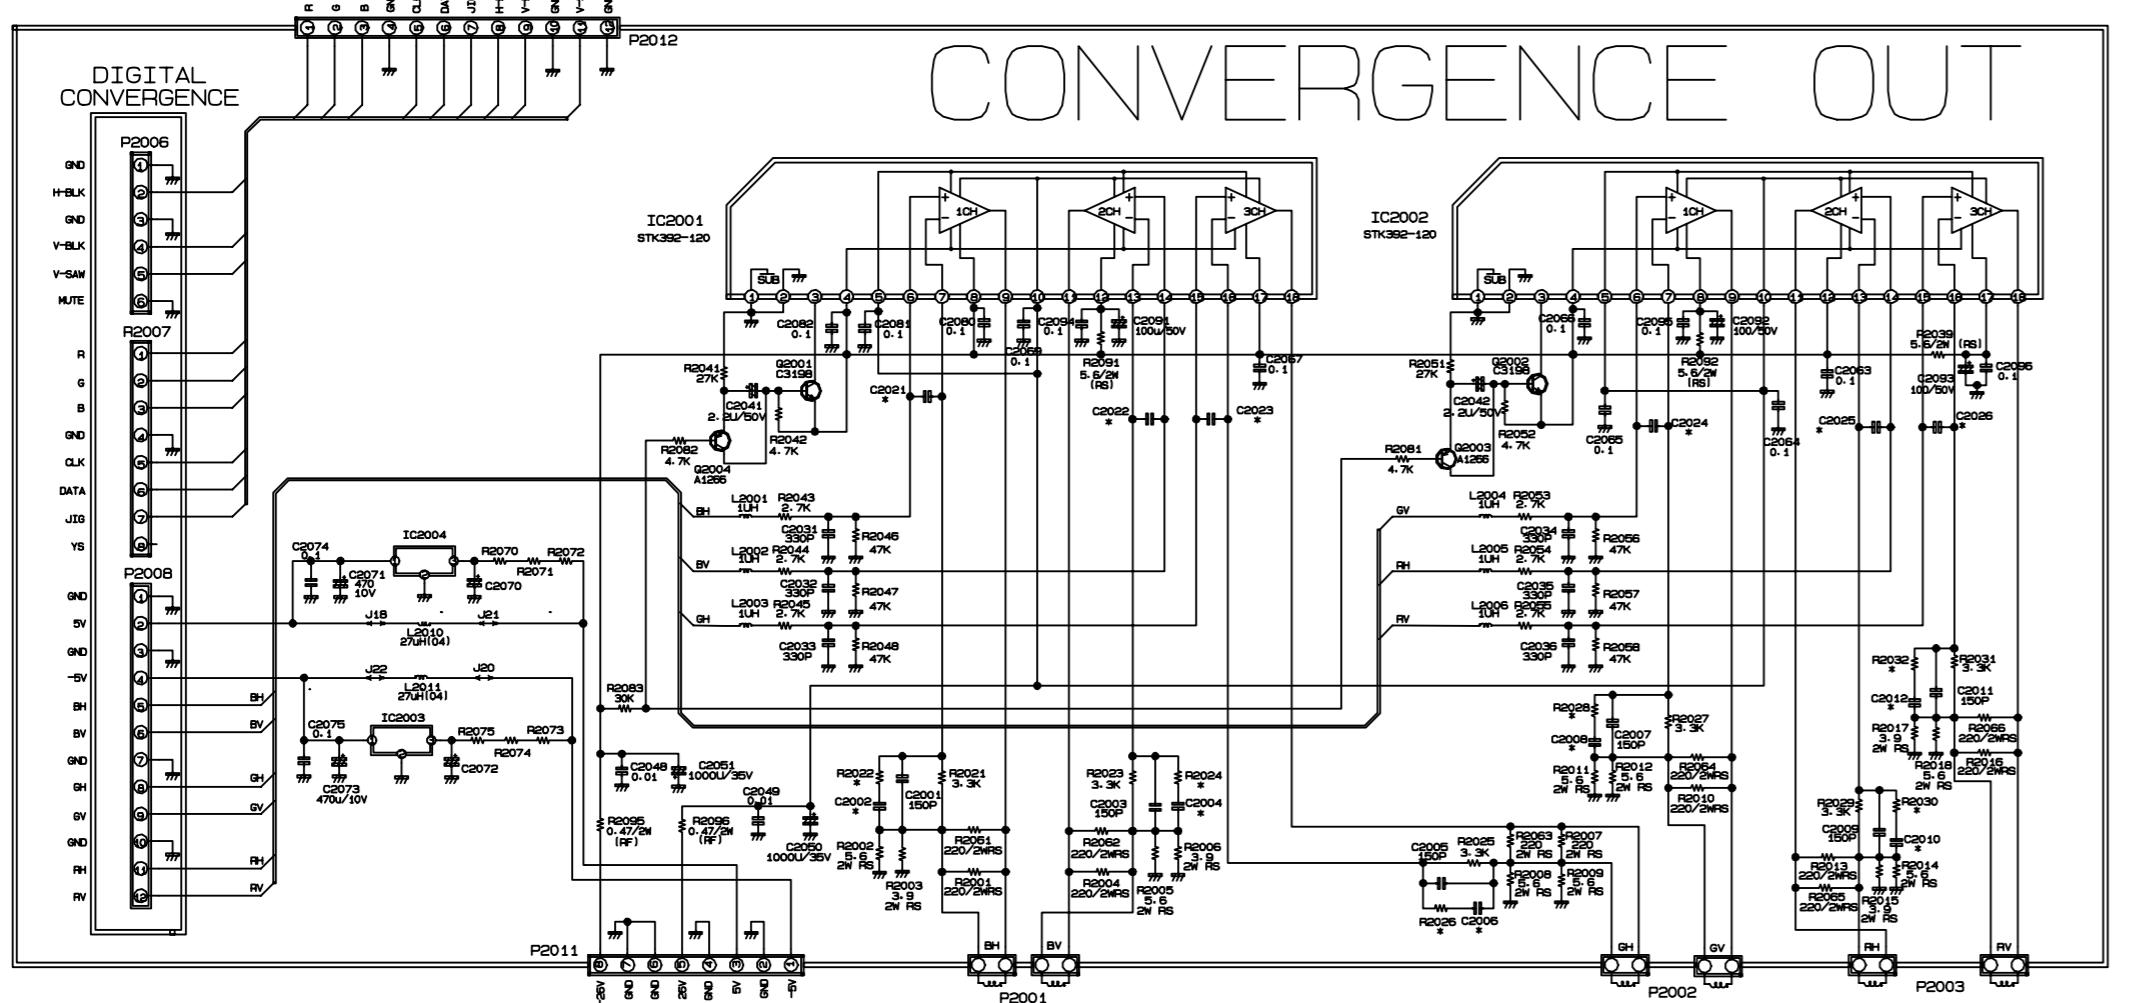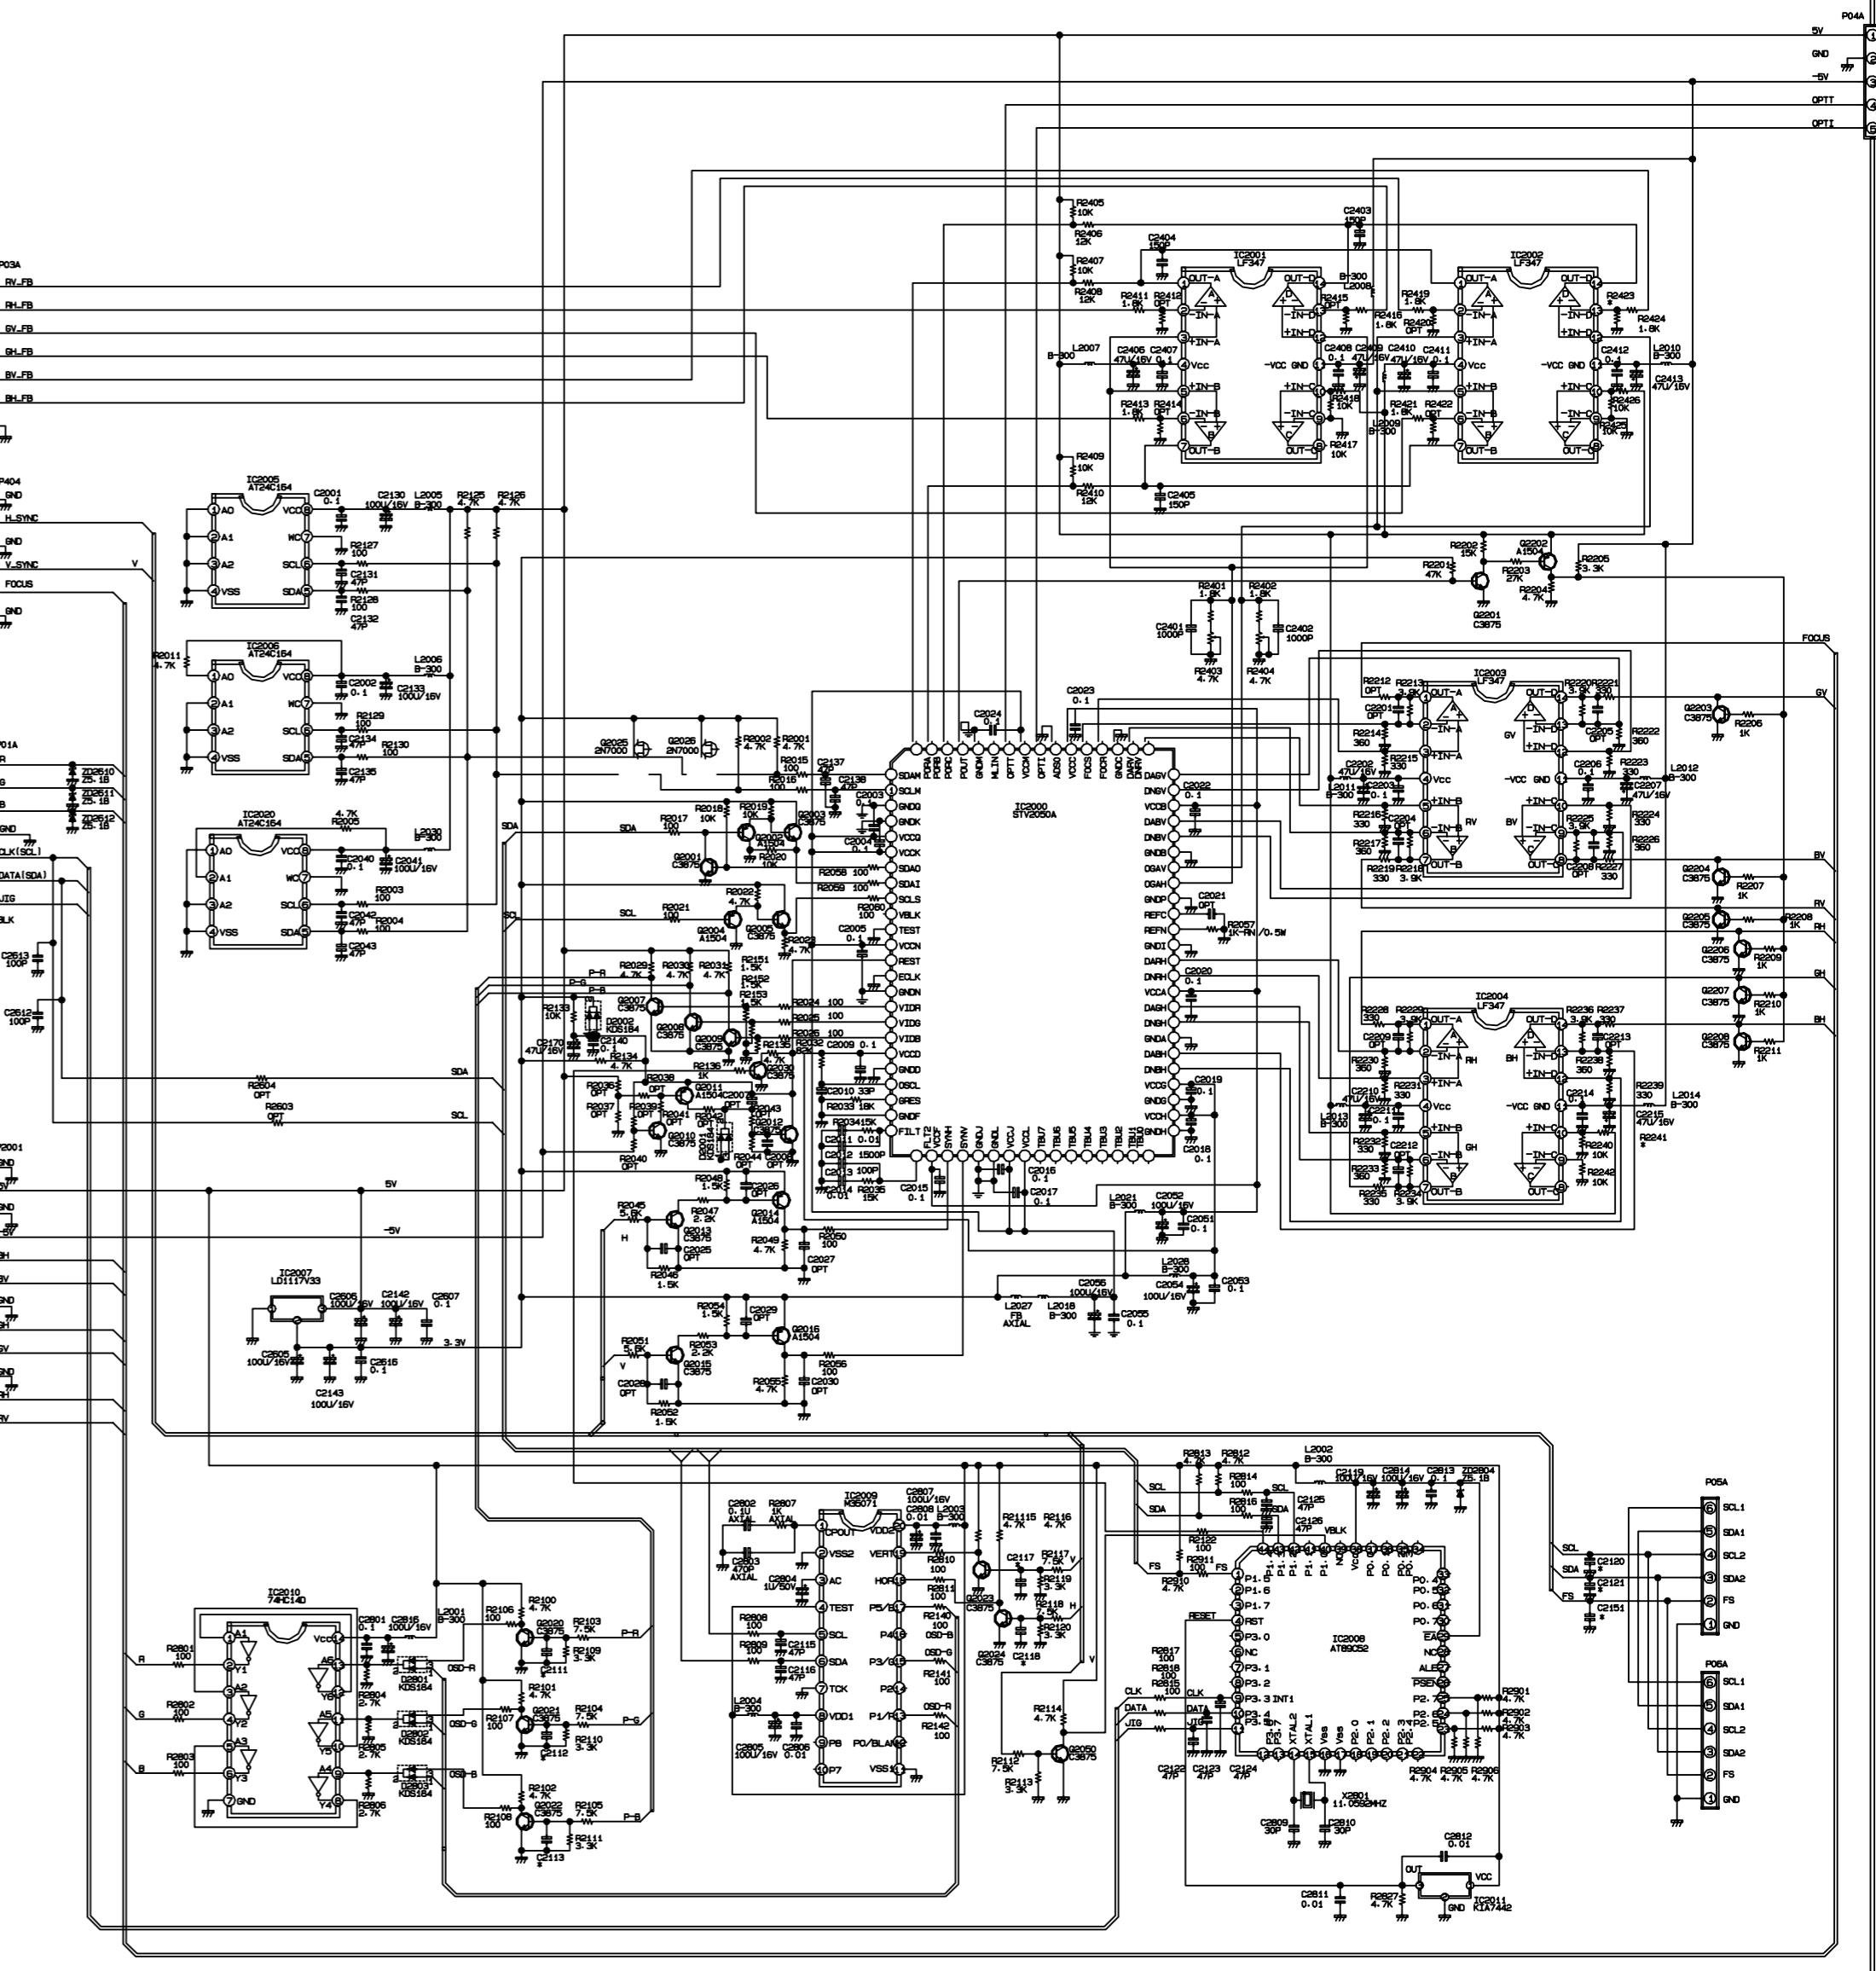

[MICOM, CONVERGENCE]

MP015A 100Hz

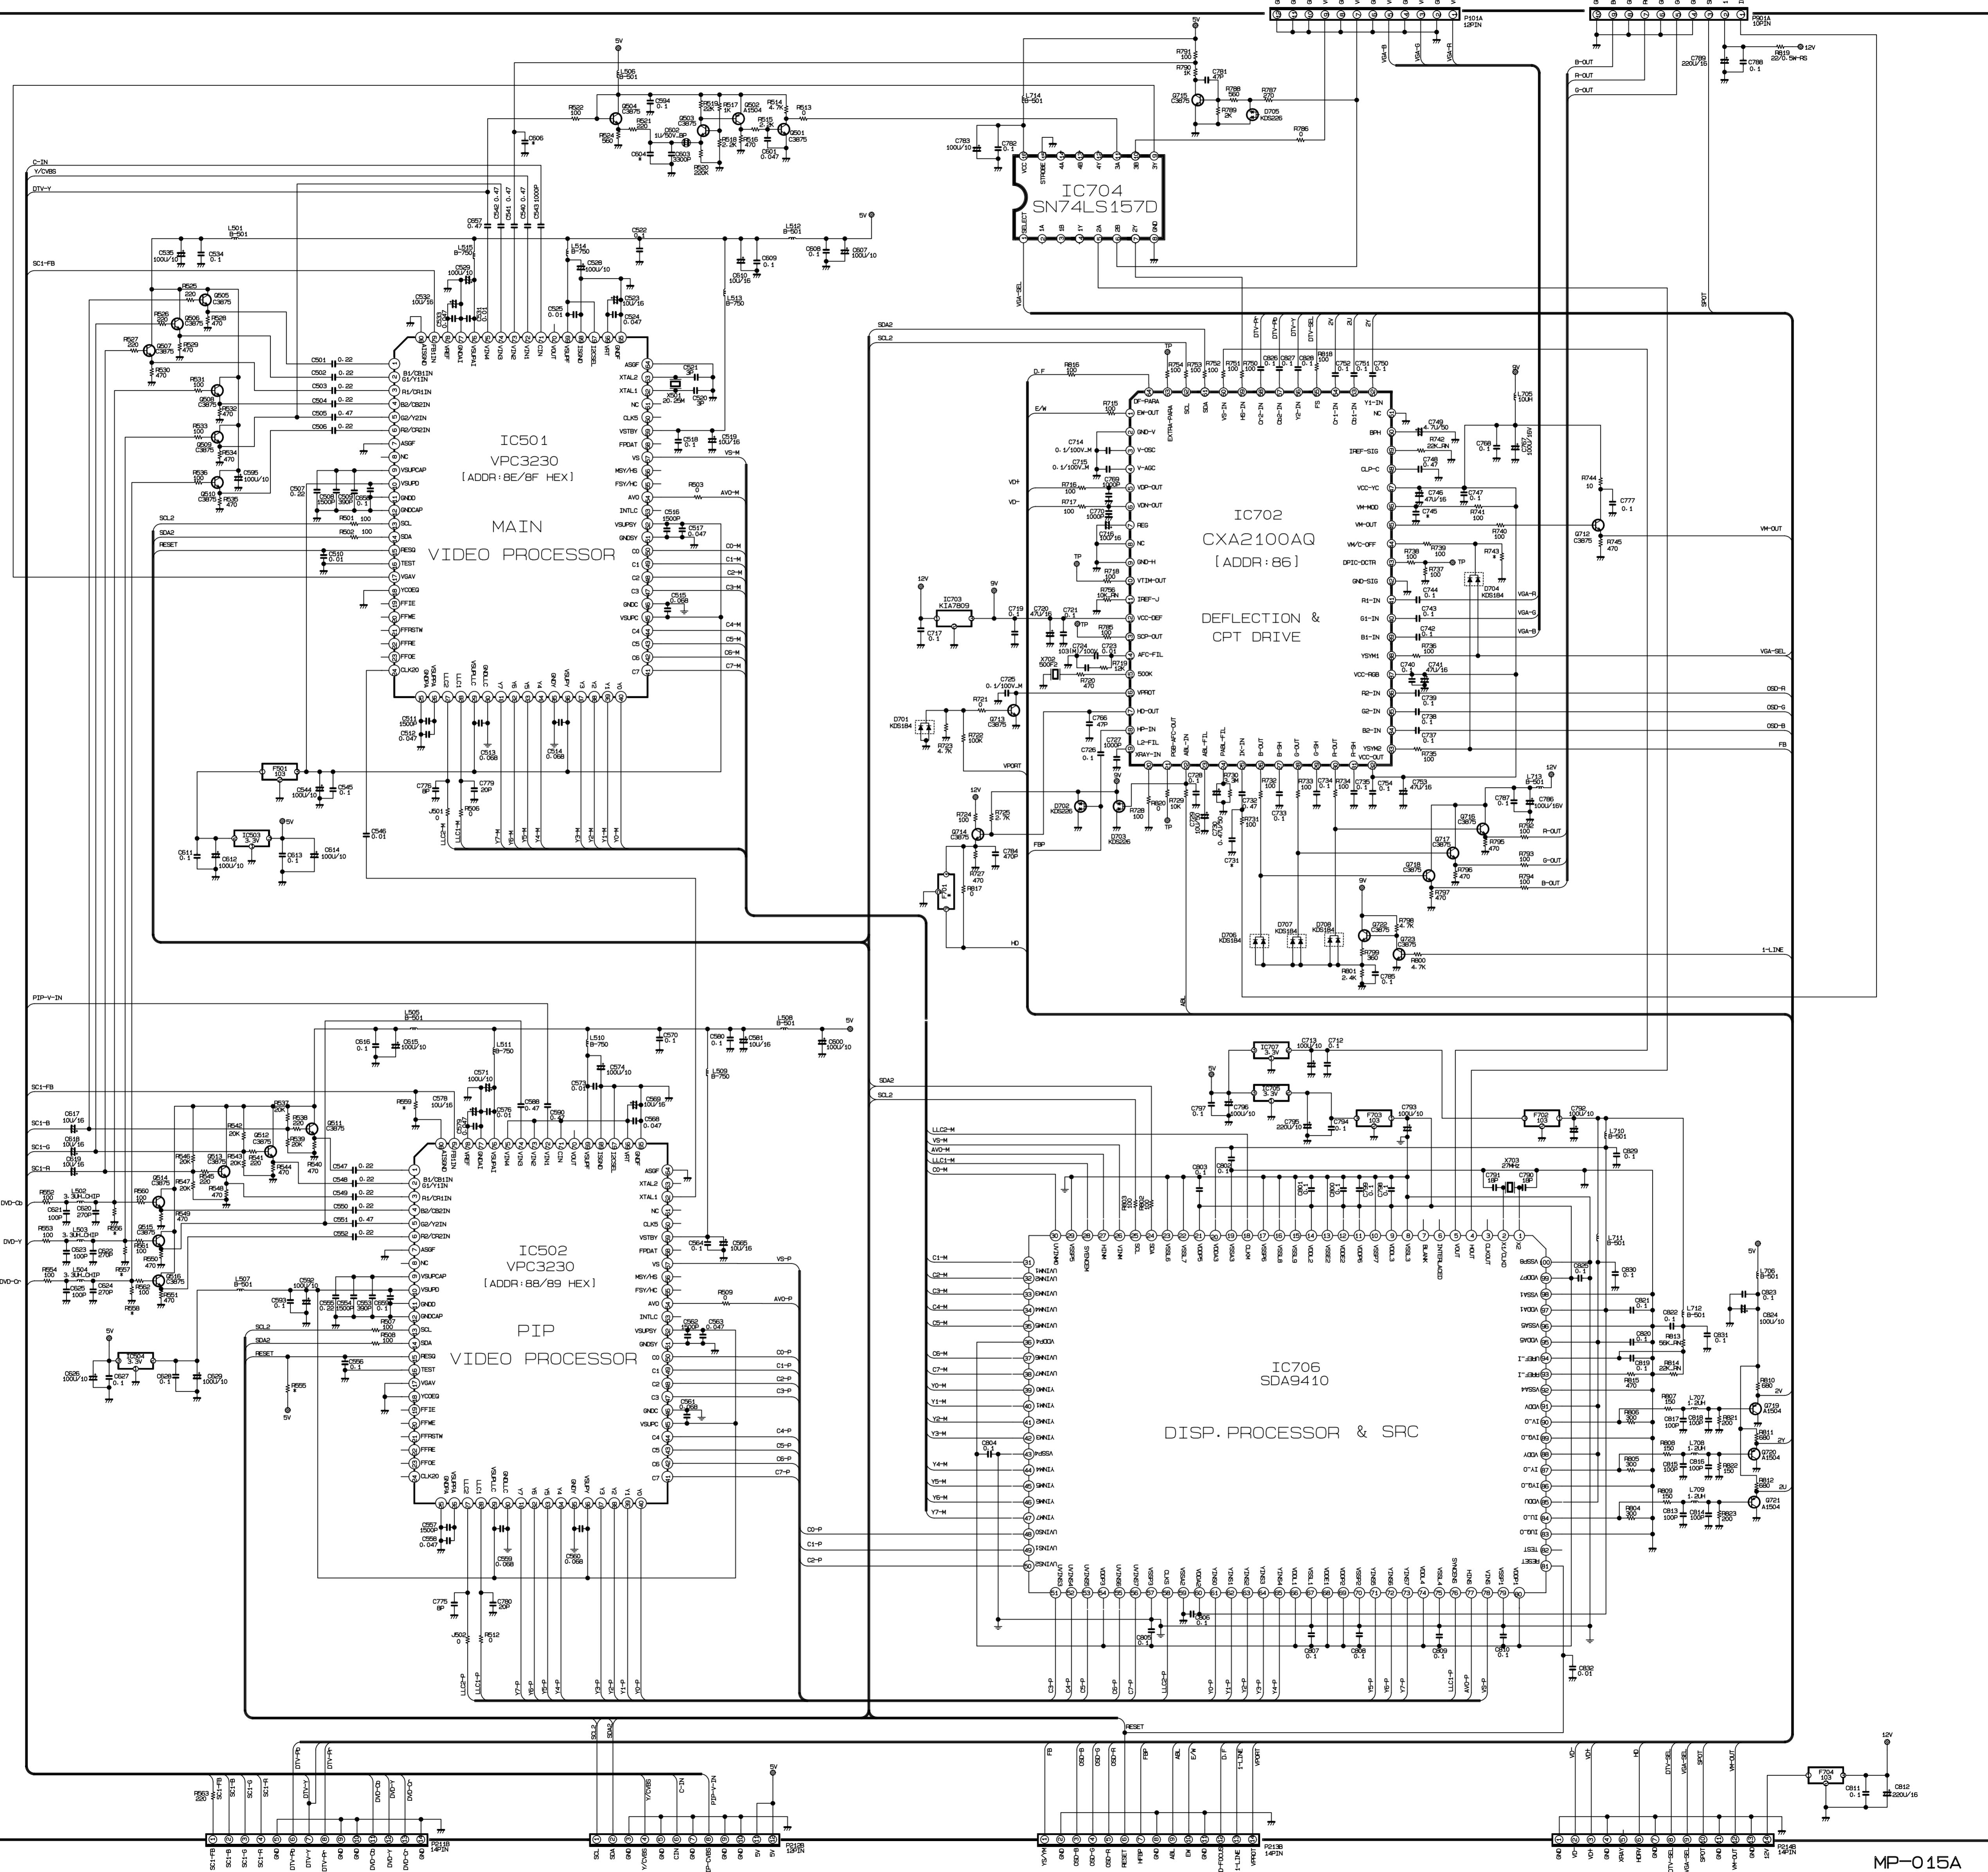


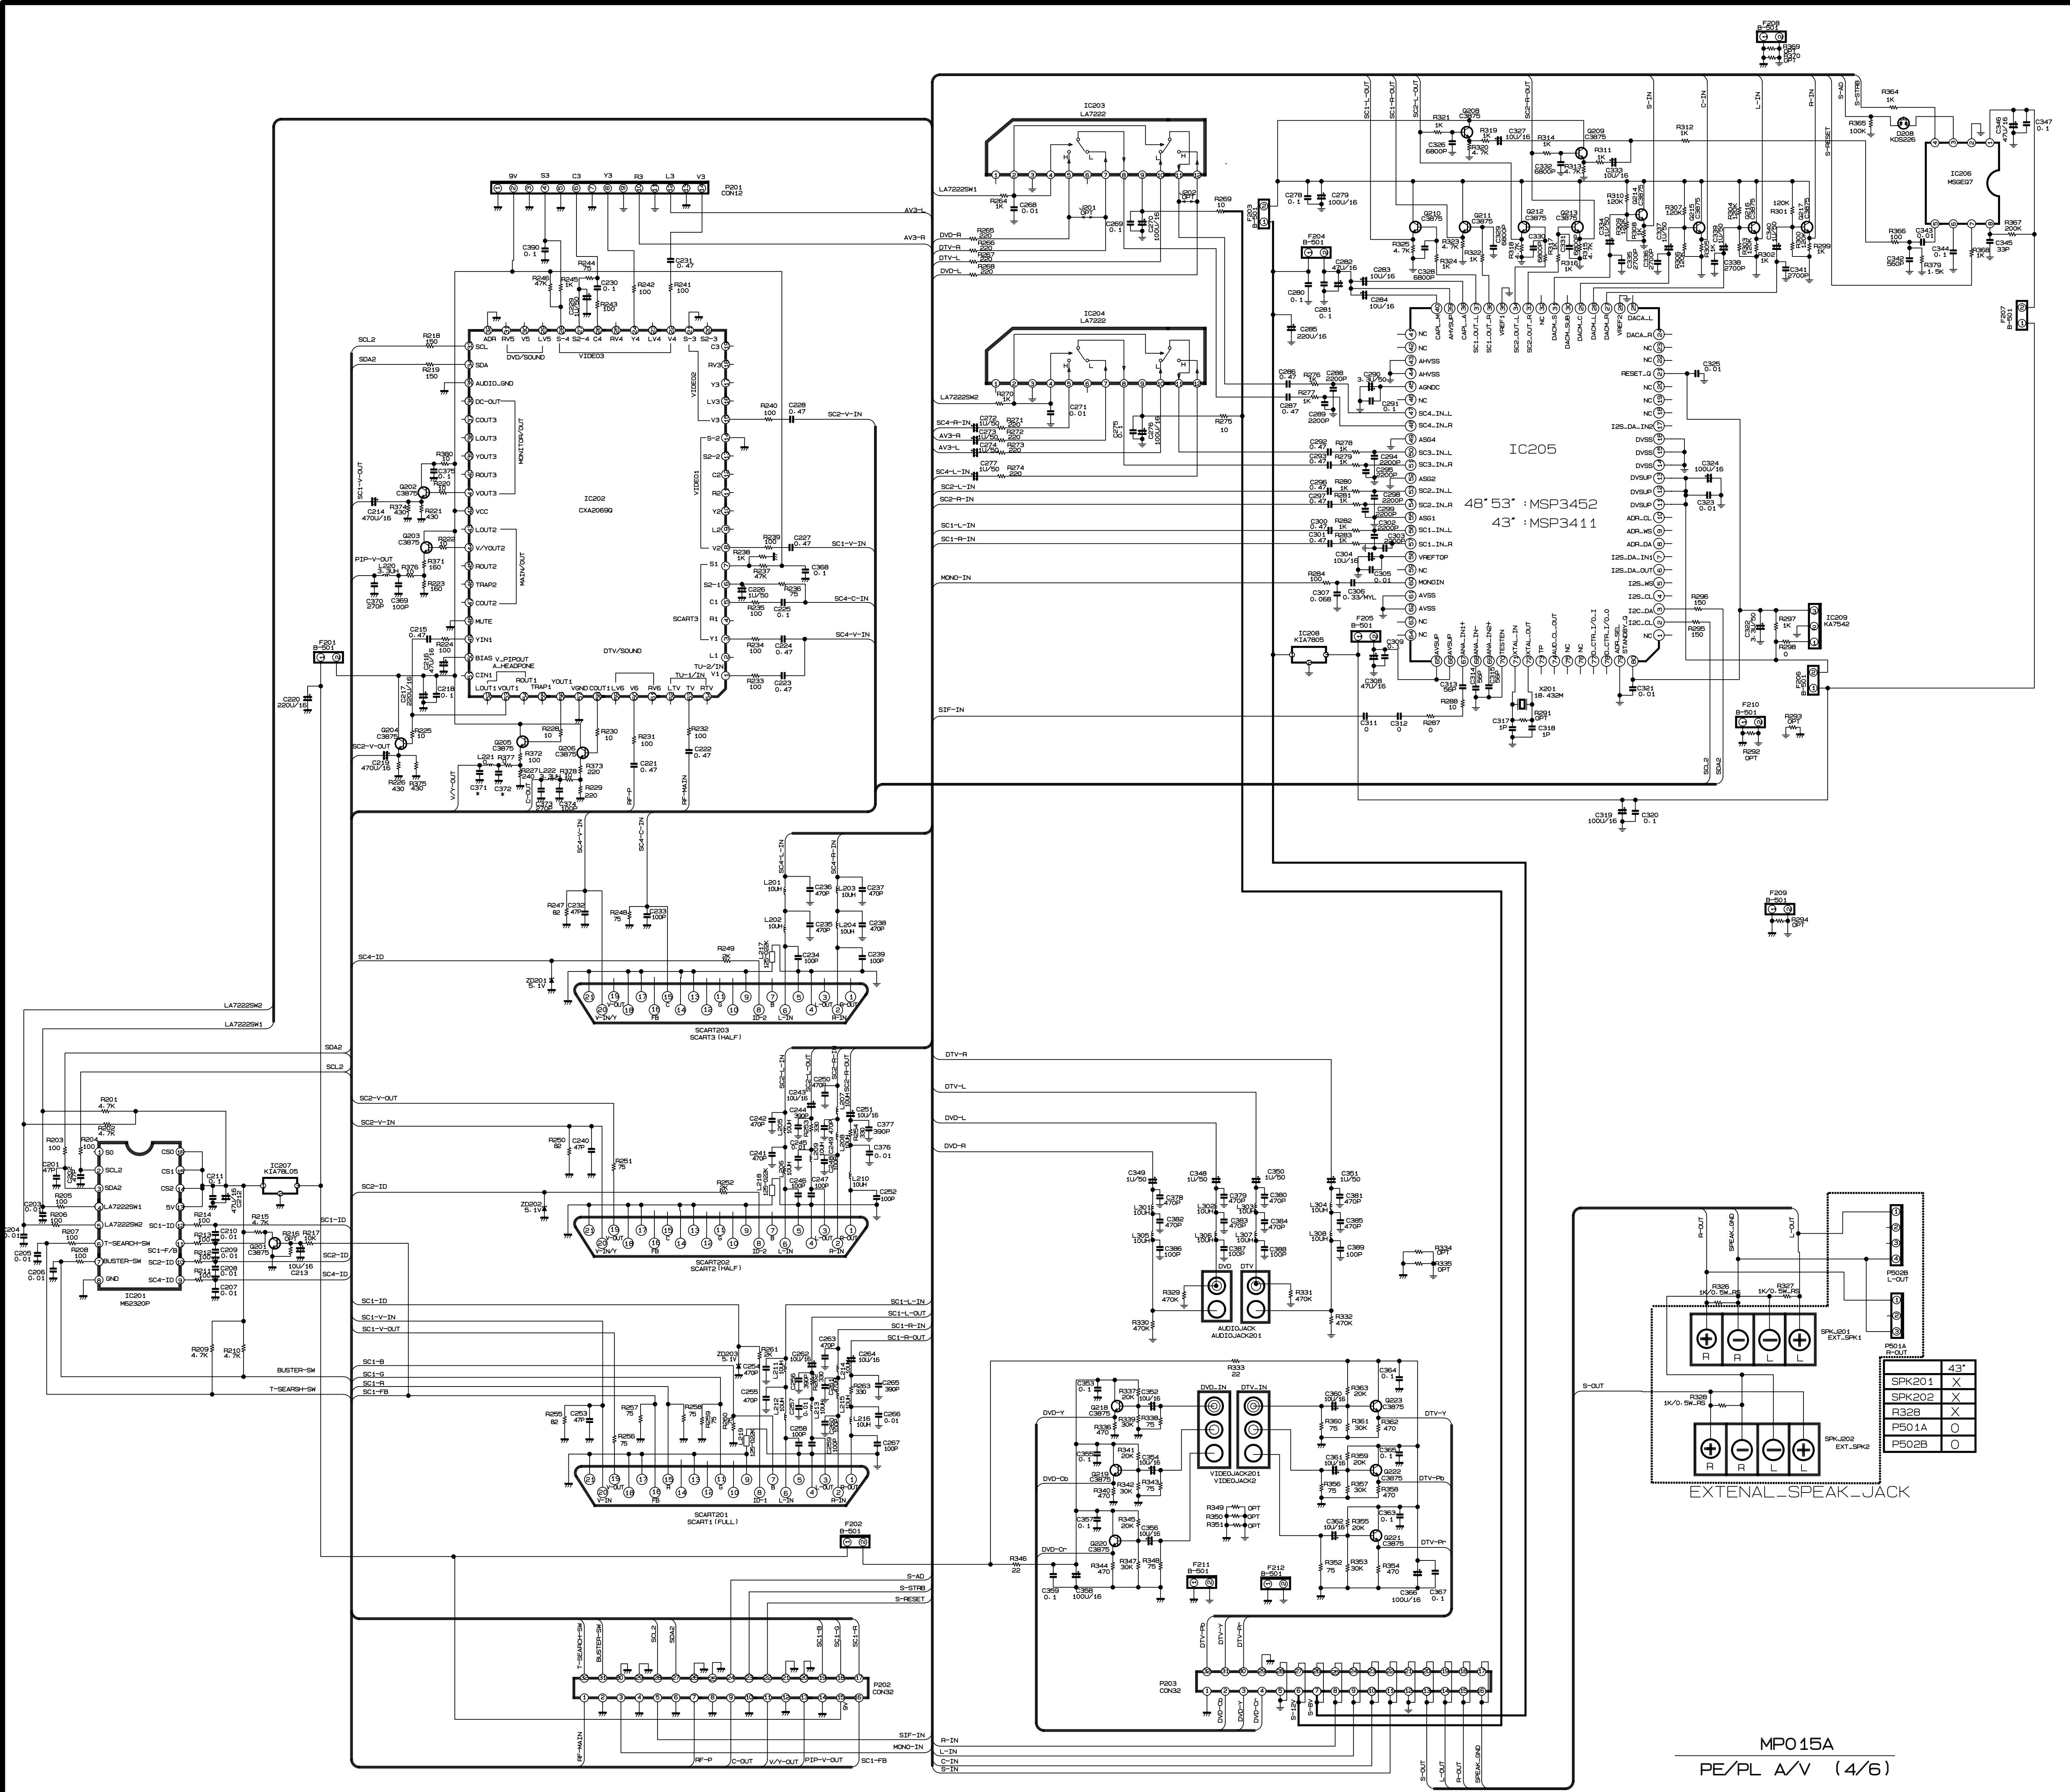

MPO15A

PE/PL A/V (4/6)

	43"
SPKJ201	X
SPKJ202	X
R328	
P501A	O
P502B	O

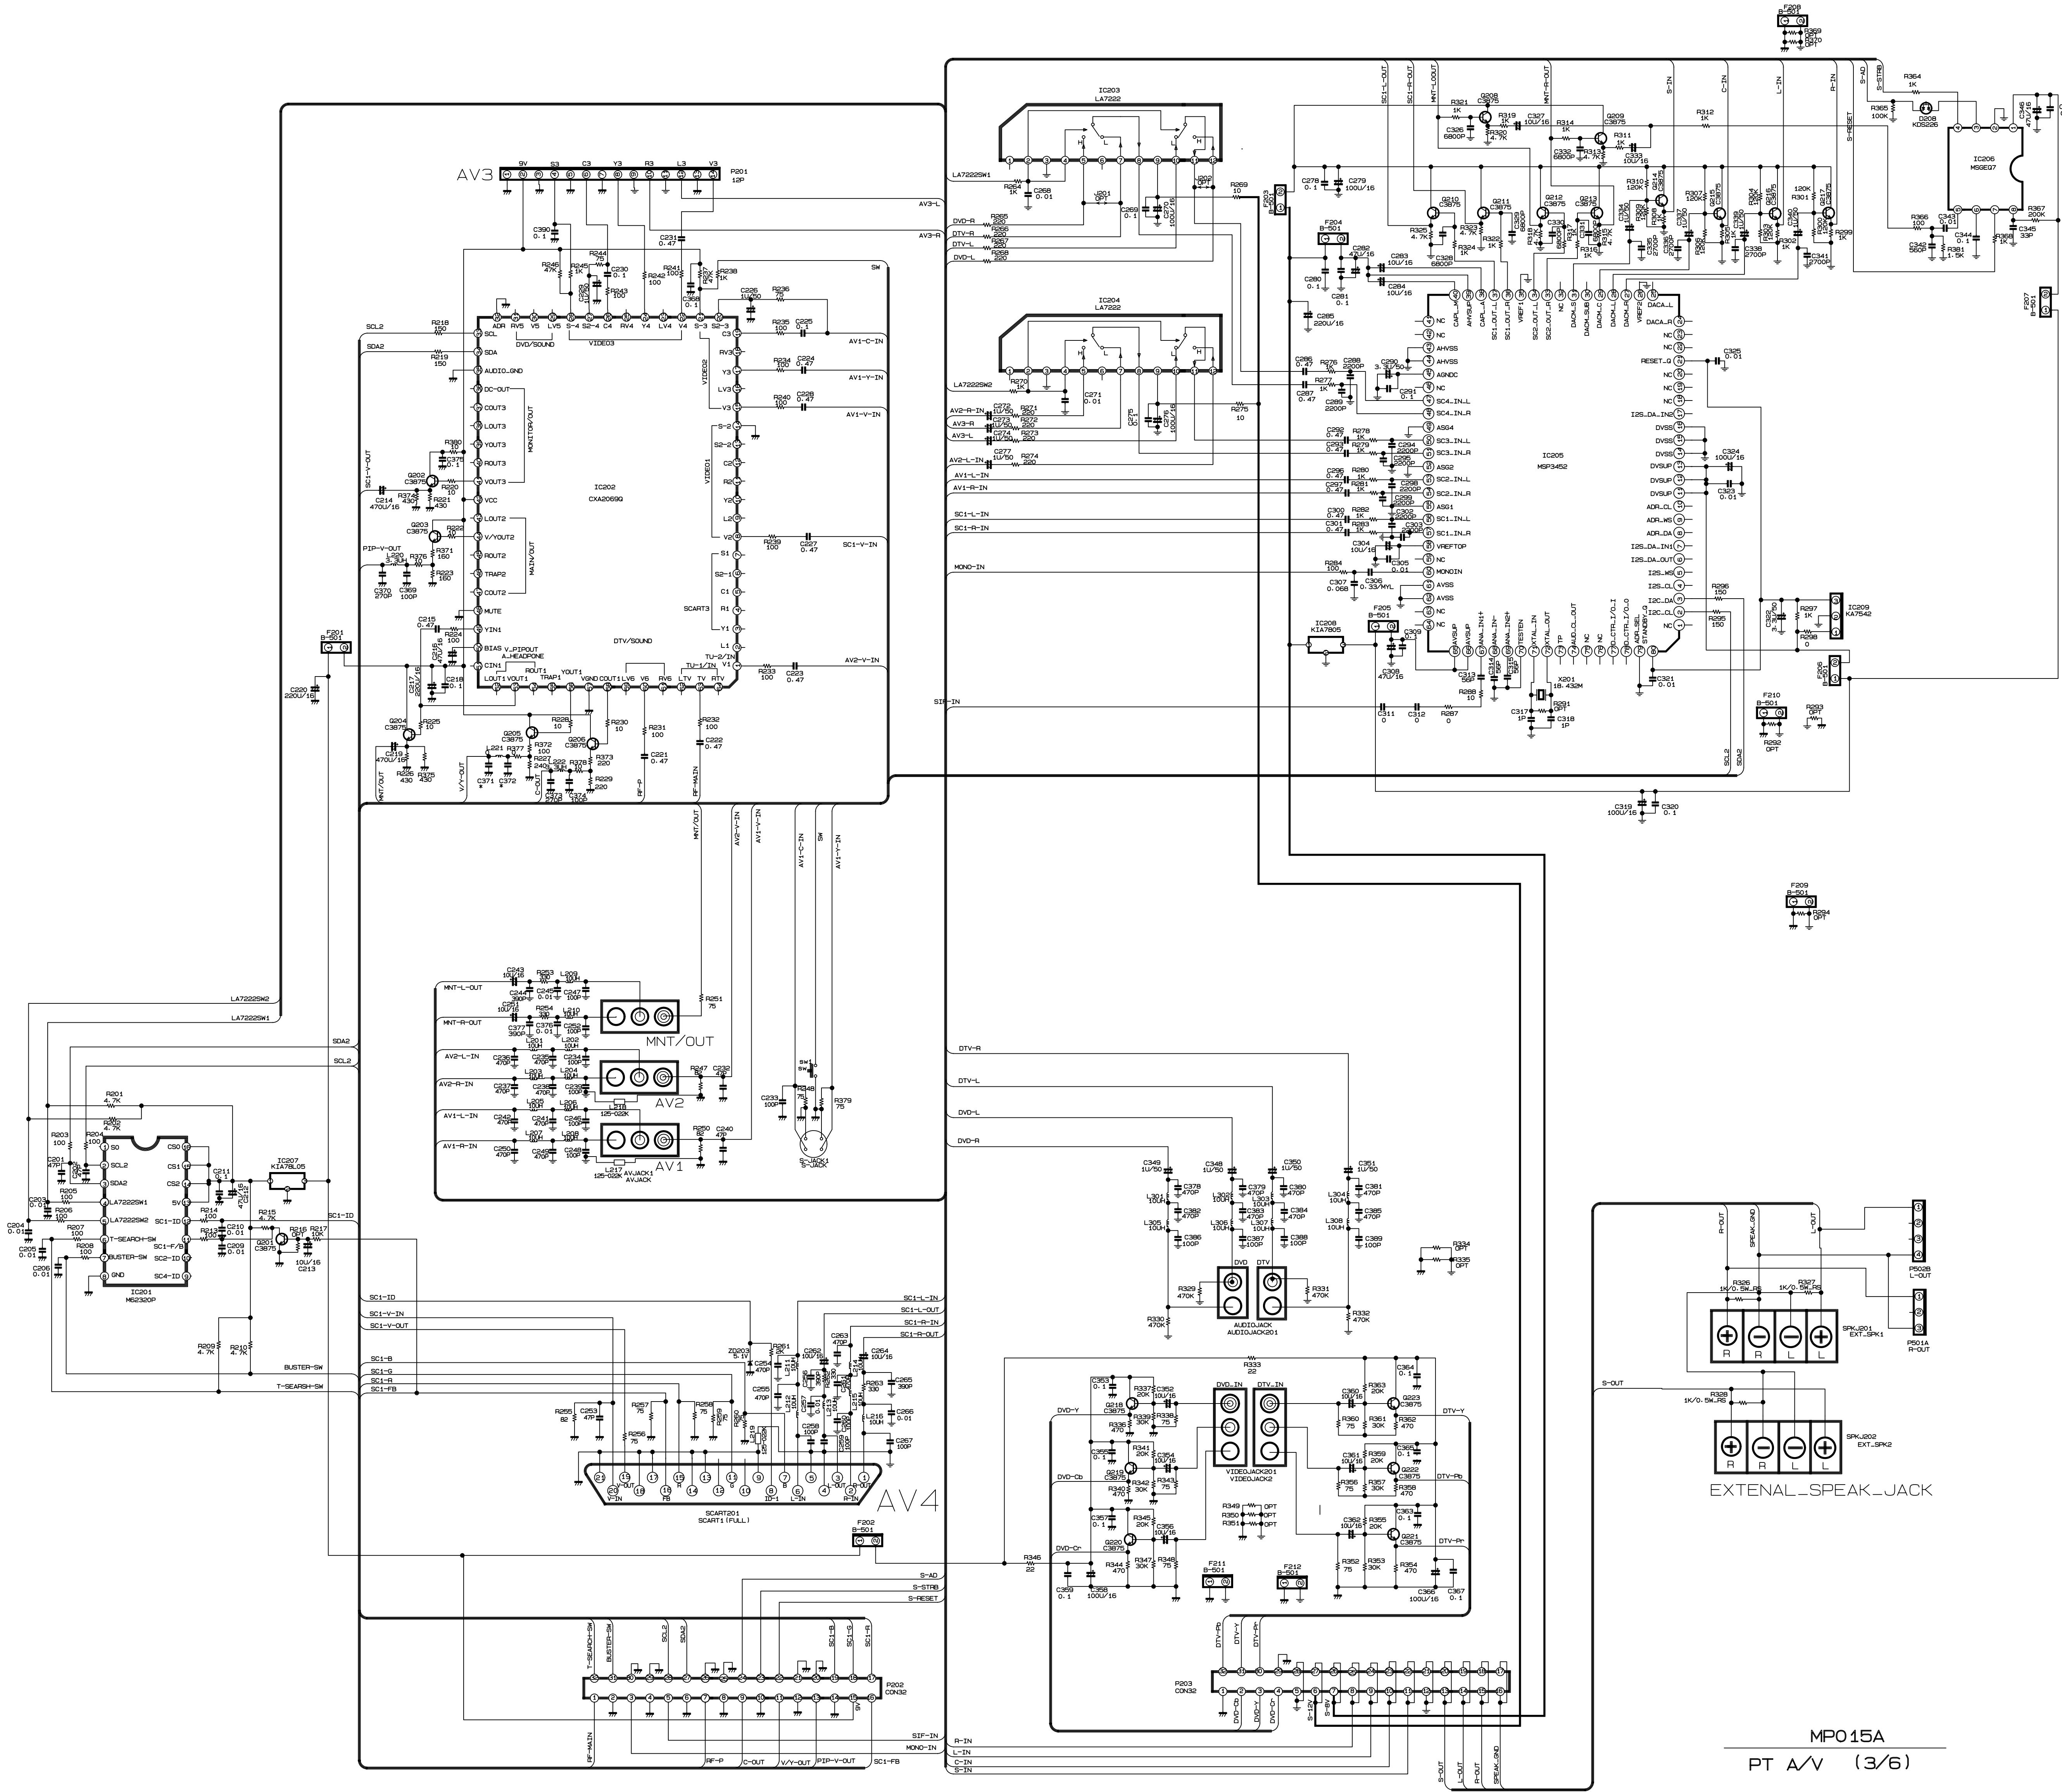

SVC. SHEET : 3854VA0094A-S1
3854VA0094A-S2
3854VA0094A-S3



LG Electronics Inc.

P/NO : 3828VD0096E

Oct.,2001
Printed in Korea