



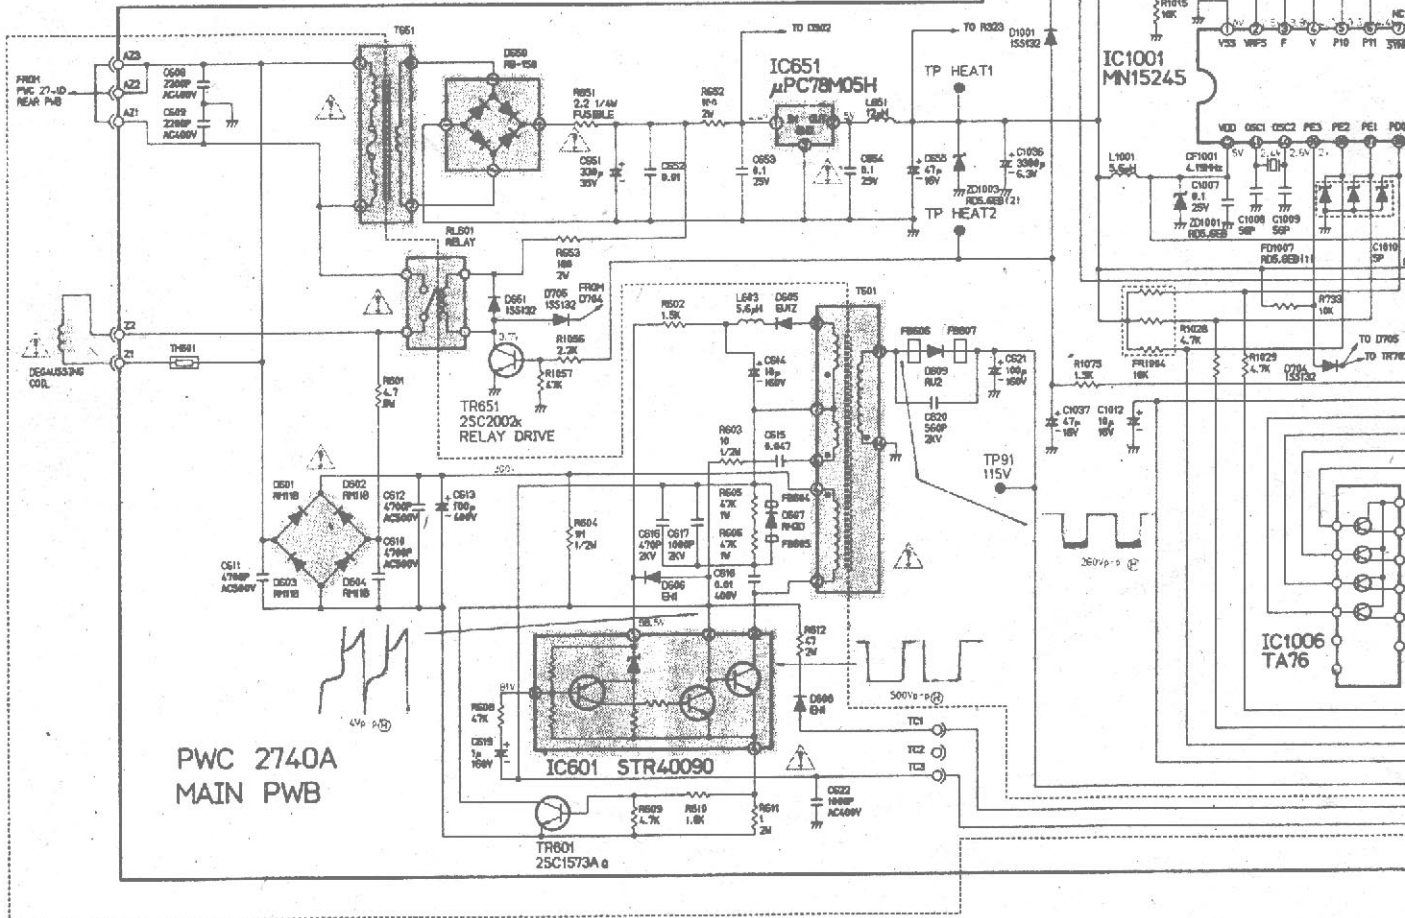
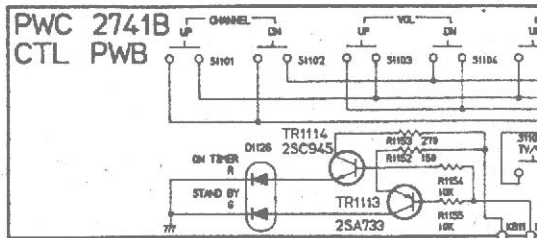
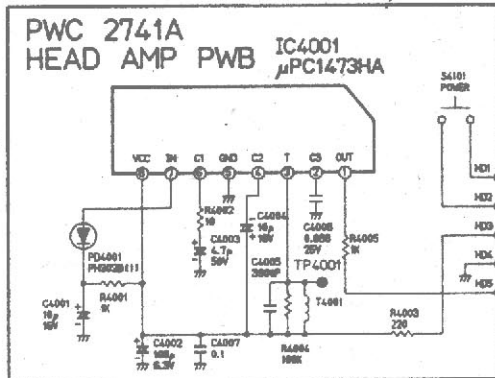


MODEL FS-1530SK(SU)
SCHEMATIC DIAGRAM.


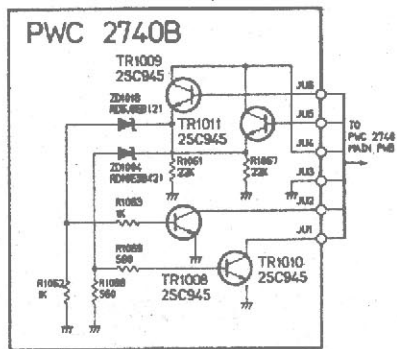


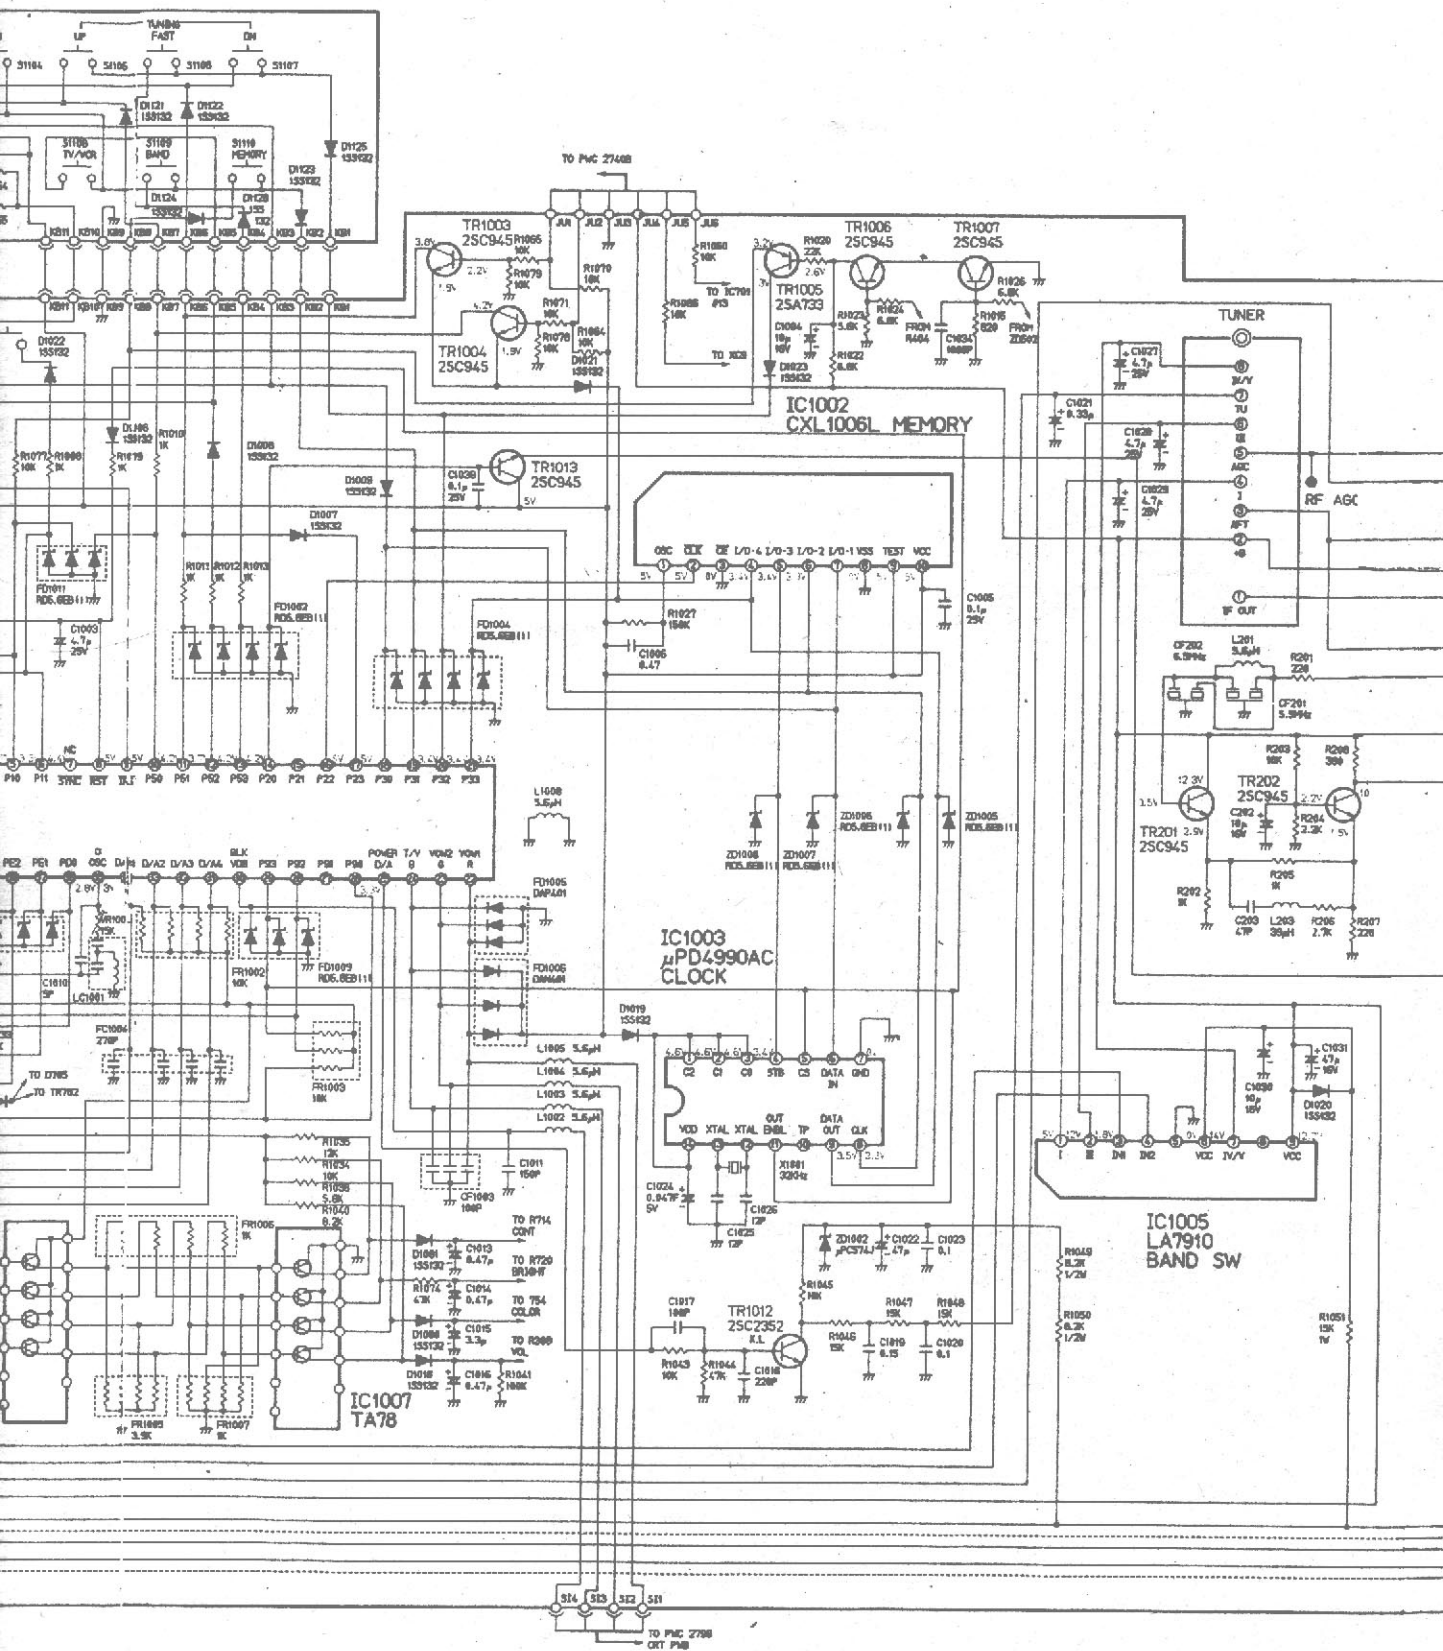

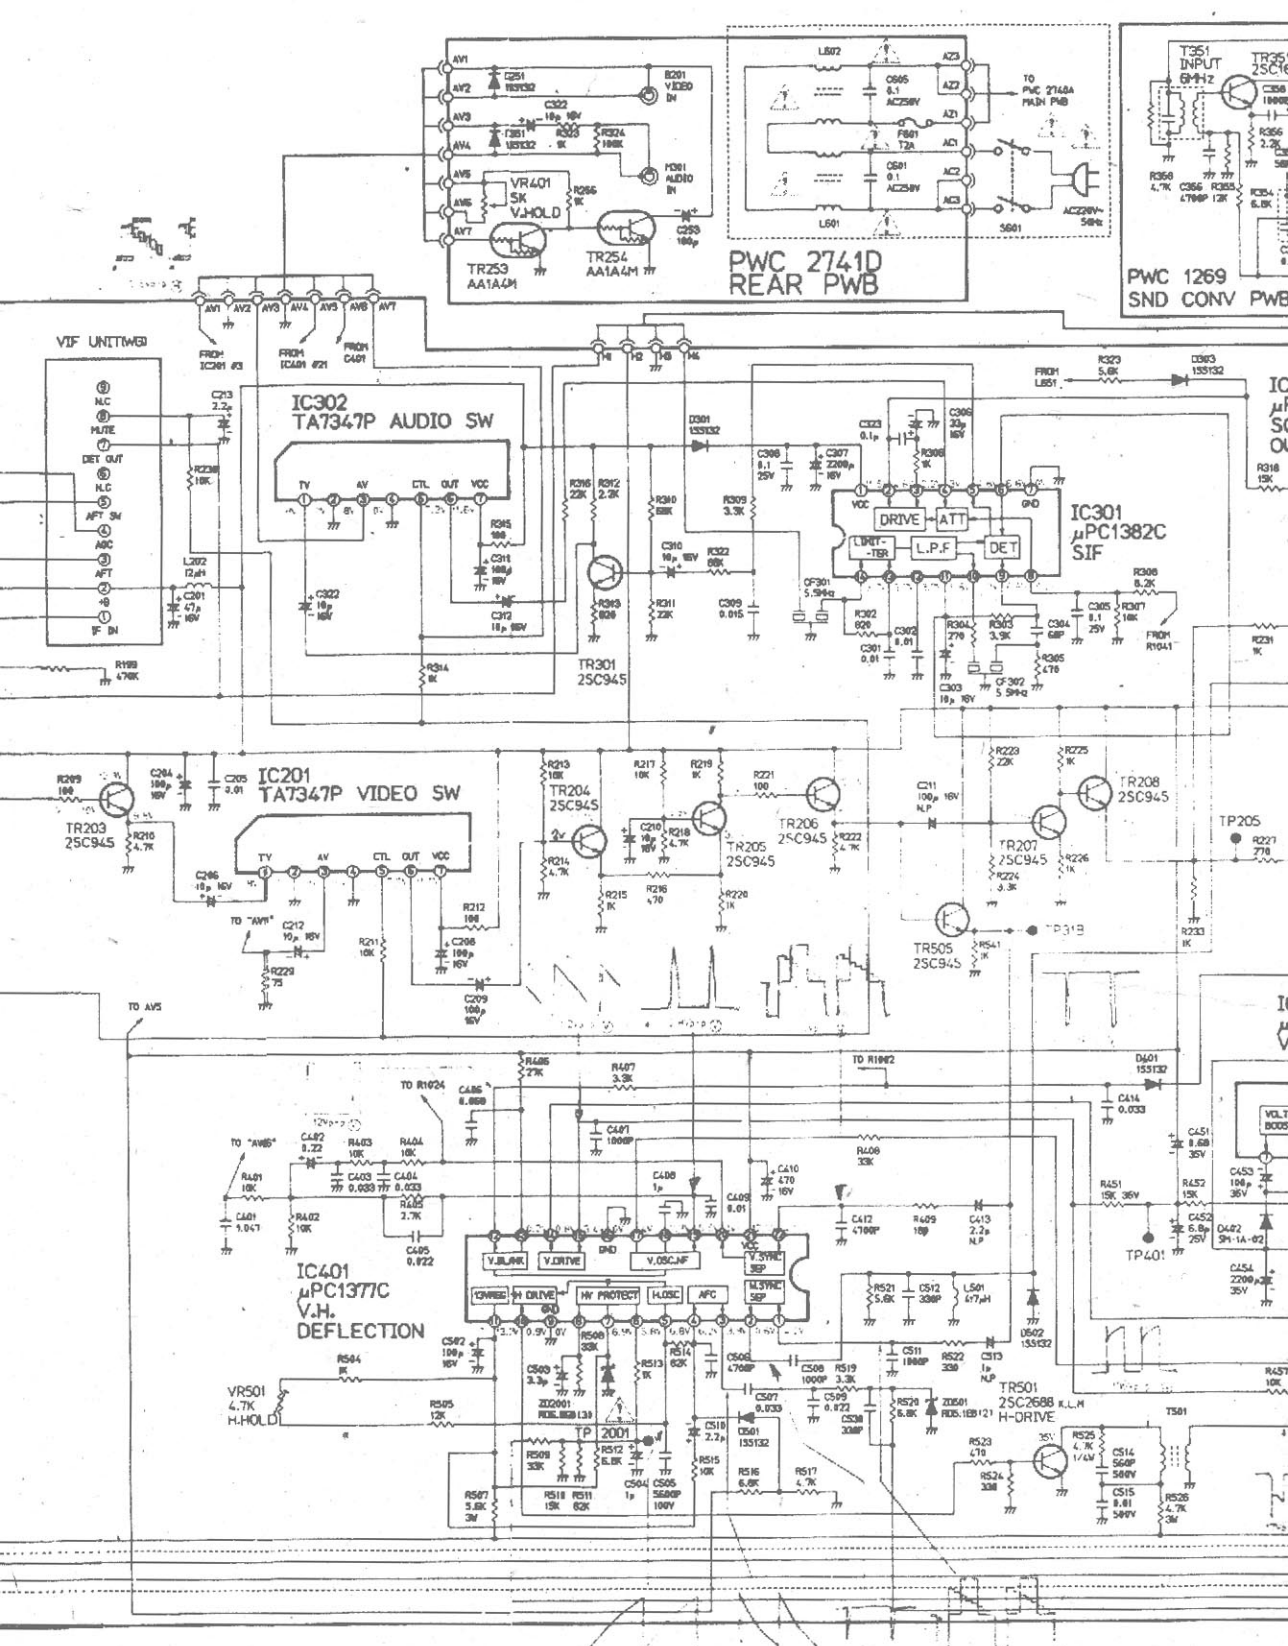

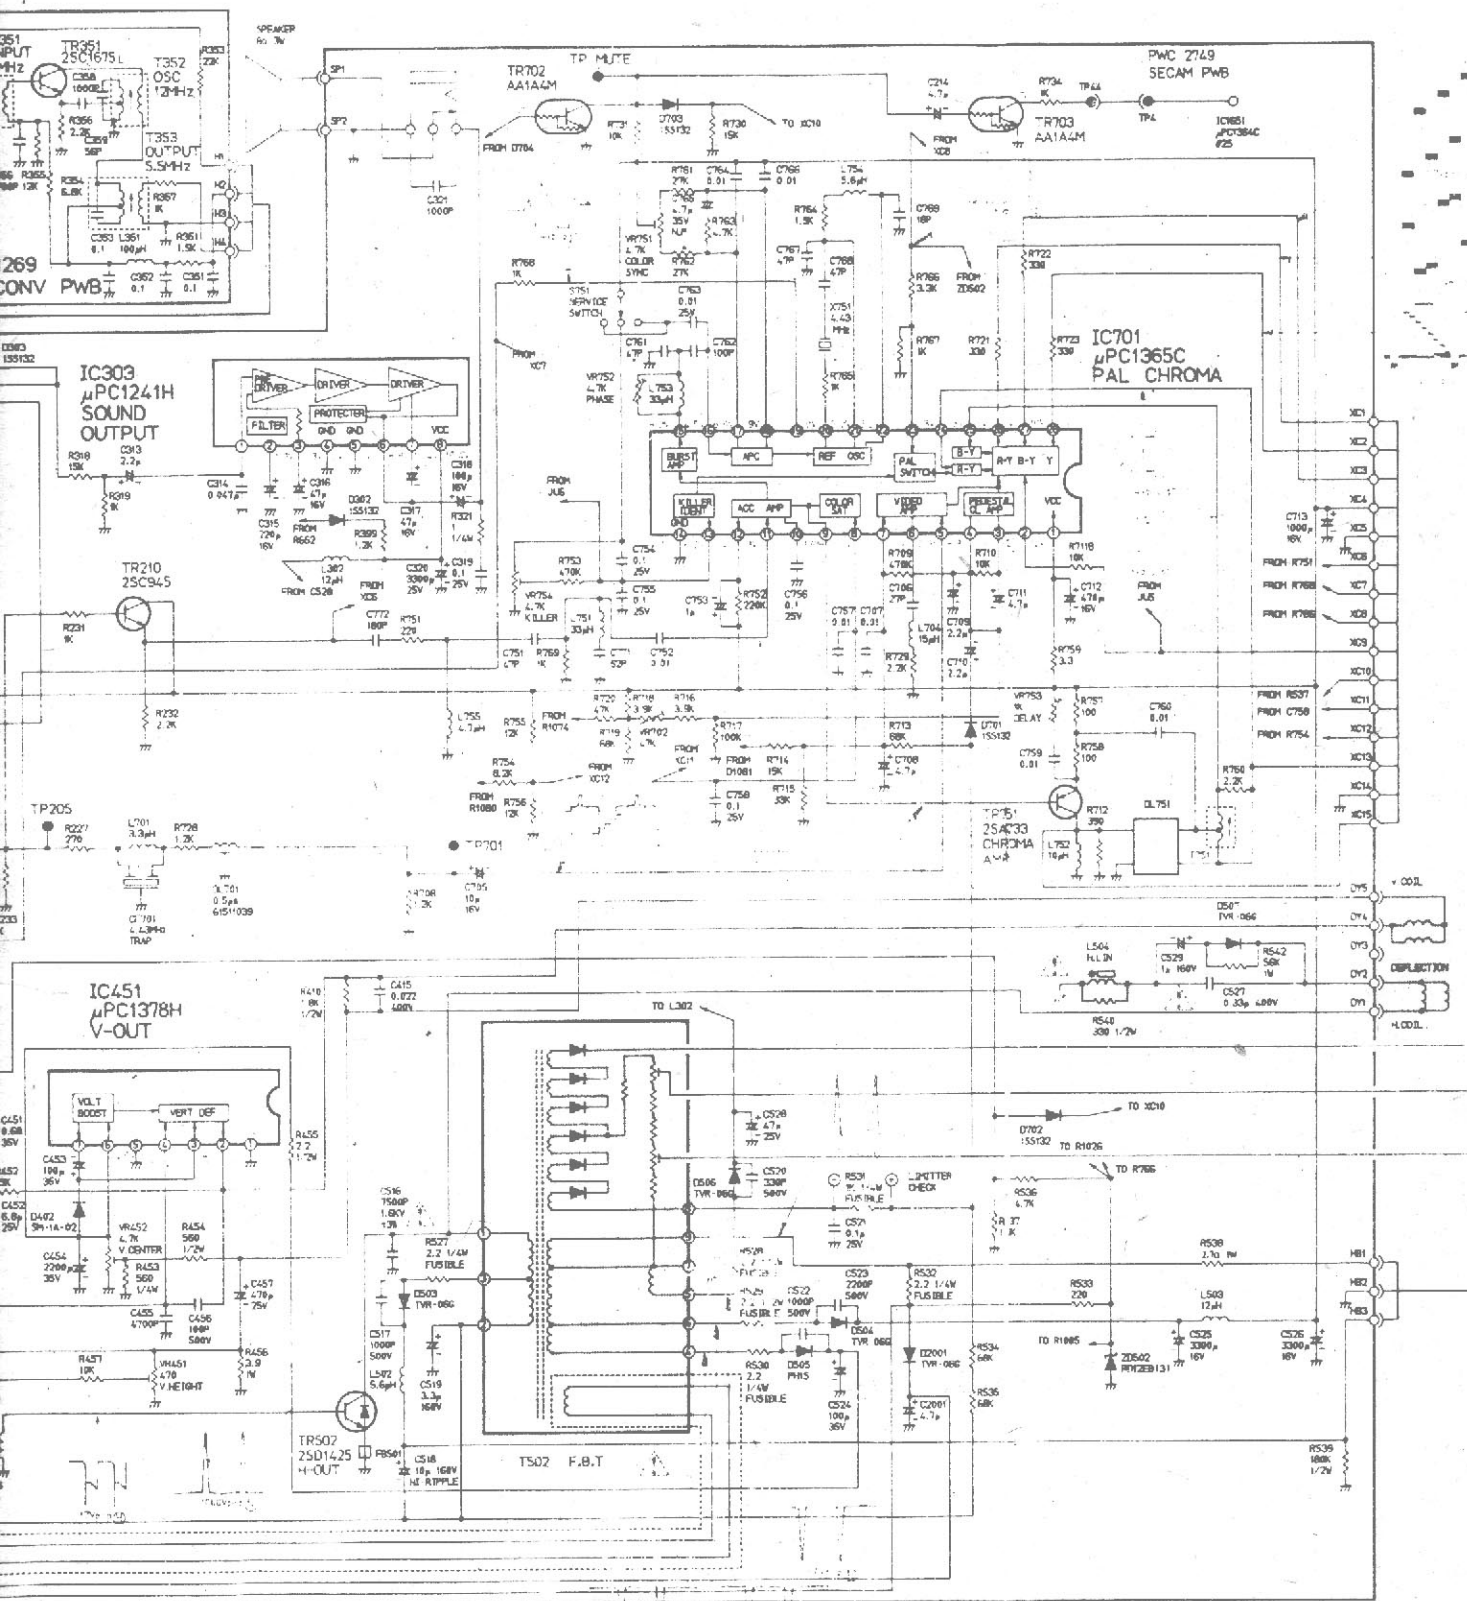

PWC 2799 CRT PWB

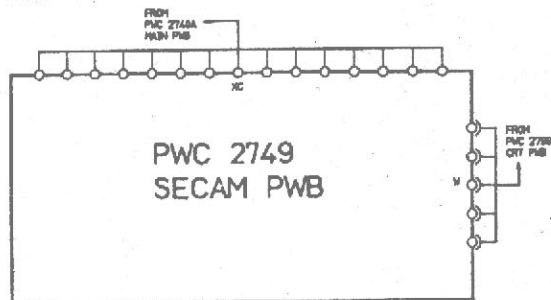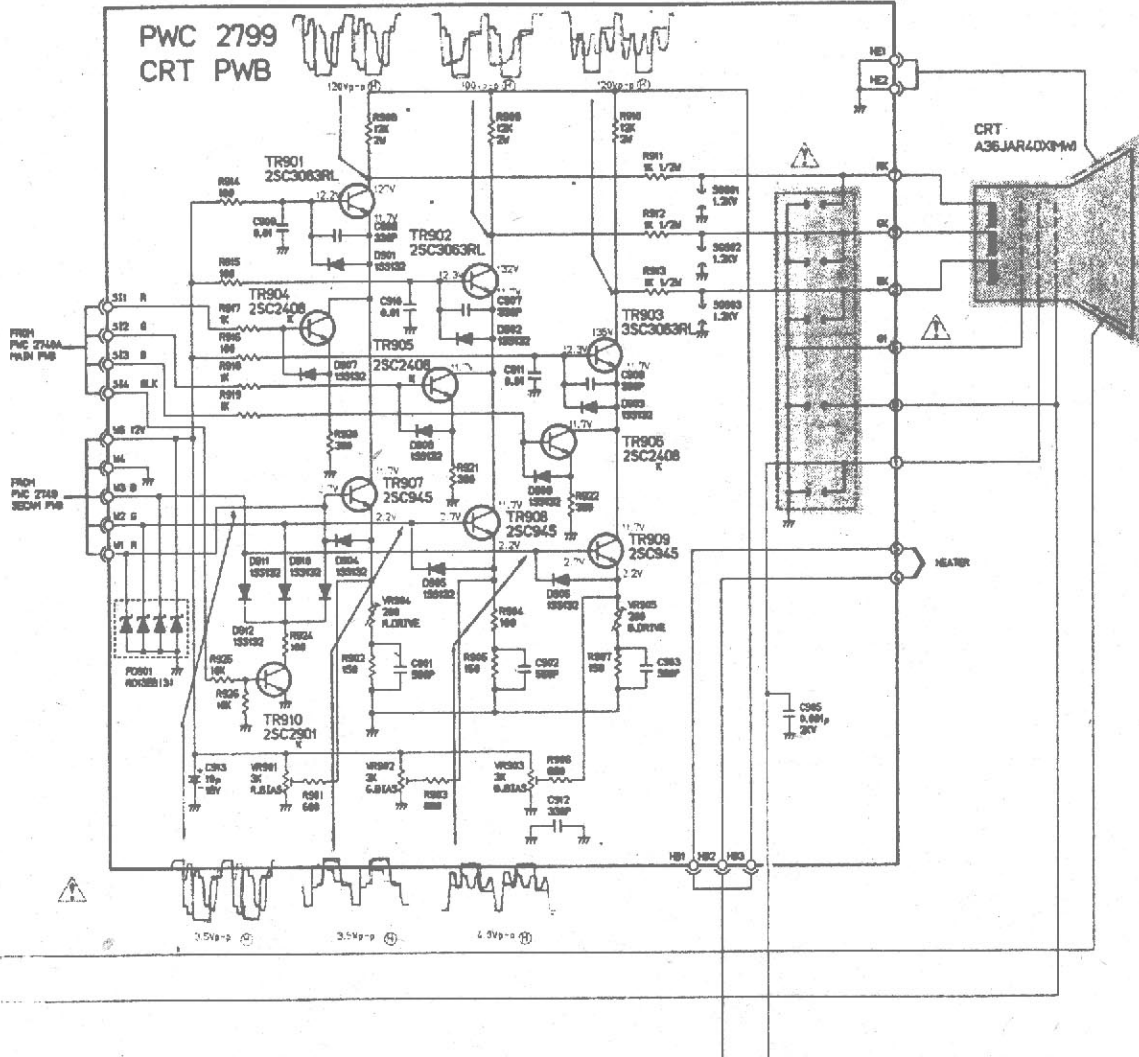


NOTES

1. RESISTOR VALUES ARE IN Ω OHM Ω K=1,000 Ω M=1,000,000 Ω
2. ALL RESISTORS ARE 1/4WATT EXCEPT WHERE OTHERWISE INDICATED.
3. CAPACITOR VALUES ARE IN μ F UNLESS OTHERWISE INDICATED. P-PF
4. ALL CAPACITORS ARE 50VOLTS EXCEPT WHERE OTHERWISE INDICATED.
5. VOLTAGES AND WAVEFORMS MEASURED UNDER AVERAGE COLOR SIGNAL INPUT AND CONTRAST, BRIGHTNESS CONTROL AT MAXIMUM. ALL OTHER CONTROLS SET FOR NORMAL OPERATION.
6. $\oplus$ ----- HORIZONTAL RATE. $\ominus$ ----- VERTICAL RATE.


WARNING

REPLACEMENT PARTS WHICH HAVE SPECIAL SAFETY CHARACTERISTICS ARE IDENTIFIED BY A SHADING ON THE SCHEMATIC. REPLACE THESE CRITICAL COMPONENTS WITH RECOMMENDED REPLACEMENT PARTS. DON'T DEGRADE THE SAFETY OF THE SET THROUGH UNPROPER SERVICE.


MODEL FS-1530SK(SU)
SECAM PWB
SCHEMATIC DIAGRAM

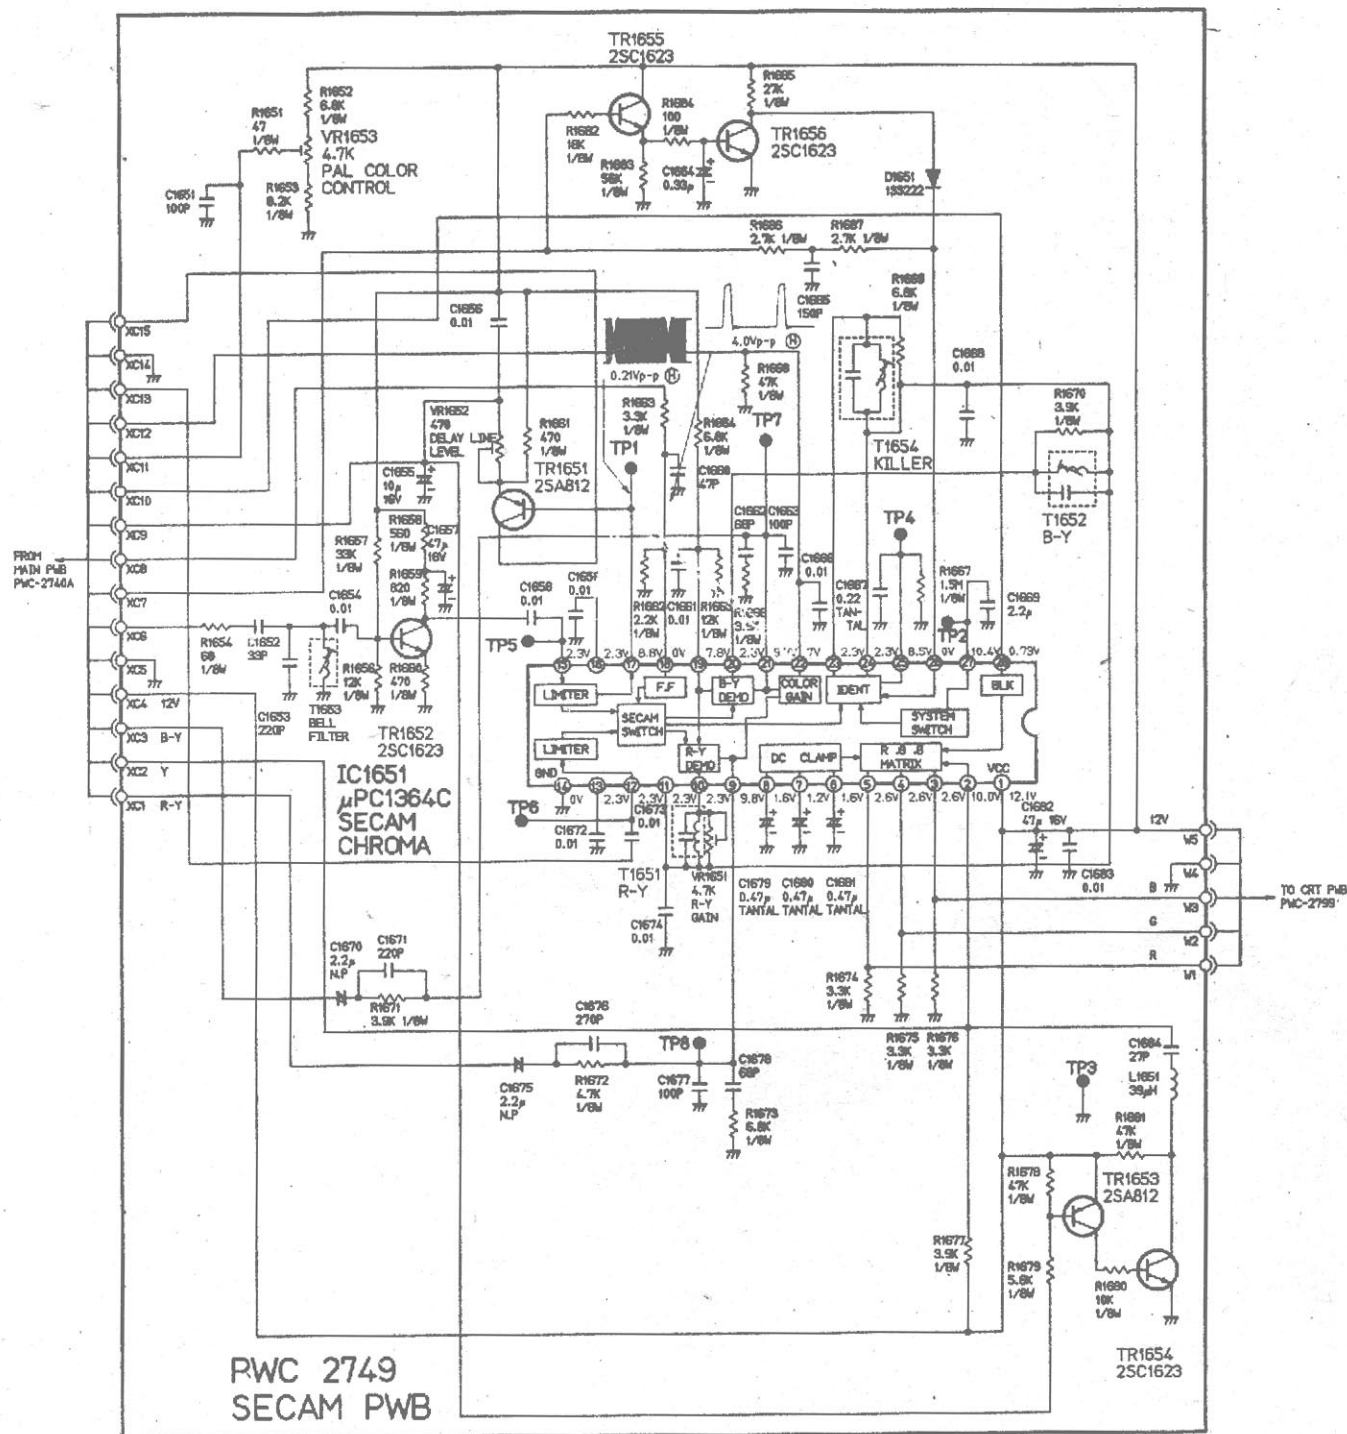

VIF UNIT (SK) SCHEMATIC DIAGRAM

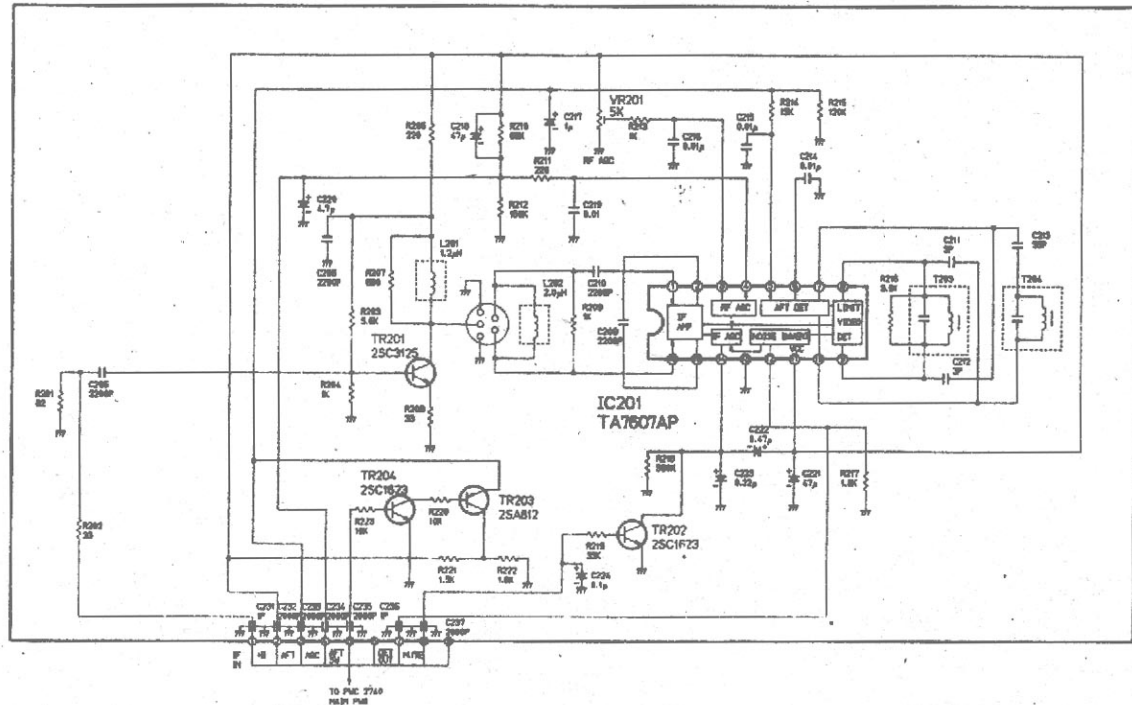

REMOTE CONTROL (RD-305E) SCHEMATIC DIAGRAM

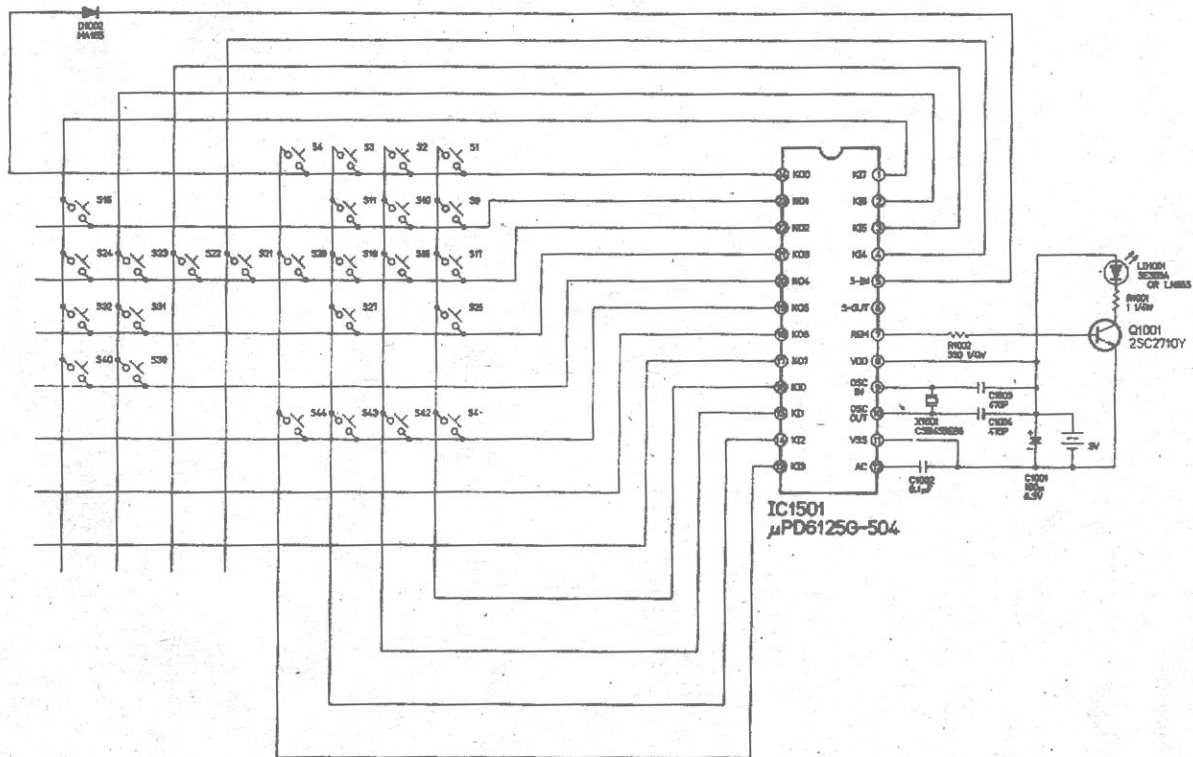

KEY SW	DATA	COMMAND
S1	0	0
S2	0	1
S3	0	2
S4	0	3
S5	0	4
S6	0	5
S7	0	6
S8	0	7
S9	0	8
S10	0	9
S11	0	A
S16	1	F
S17	1	0
S18	1	1
S19	1	2
S20	1	3
S21	1	4
S22	1	5
S23	1	6
S24	1	7
S25	1	8
S26	1	9
S27	1	A
S28	1	B
S29	1	C
S30	1	D
S31	1	E
S32	1	F
S39	4	6
S40	4	7
S41	4	8
S42	4	9
S43	4	A
S44	4	B