
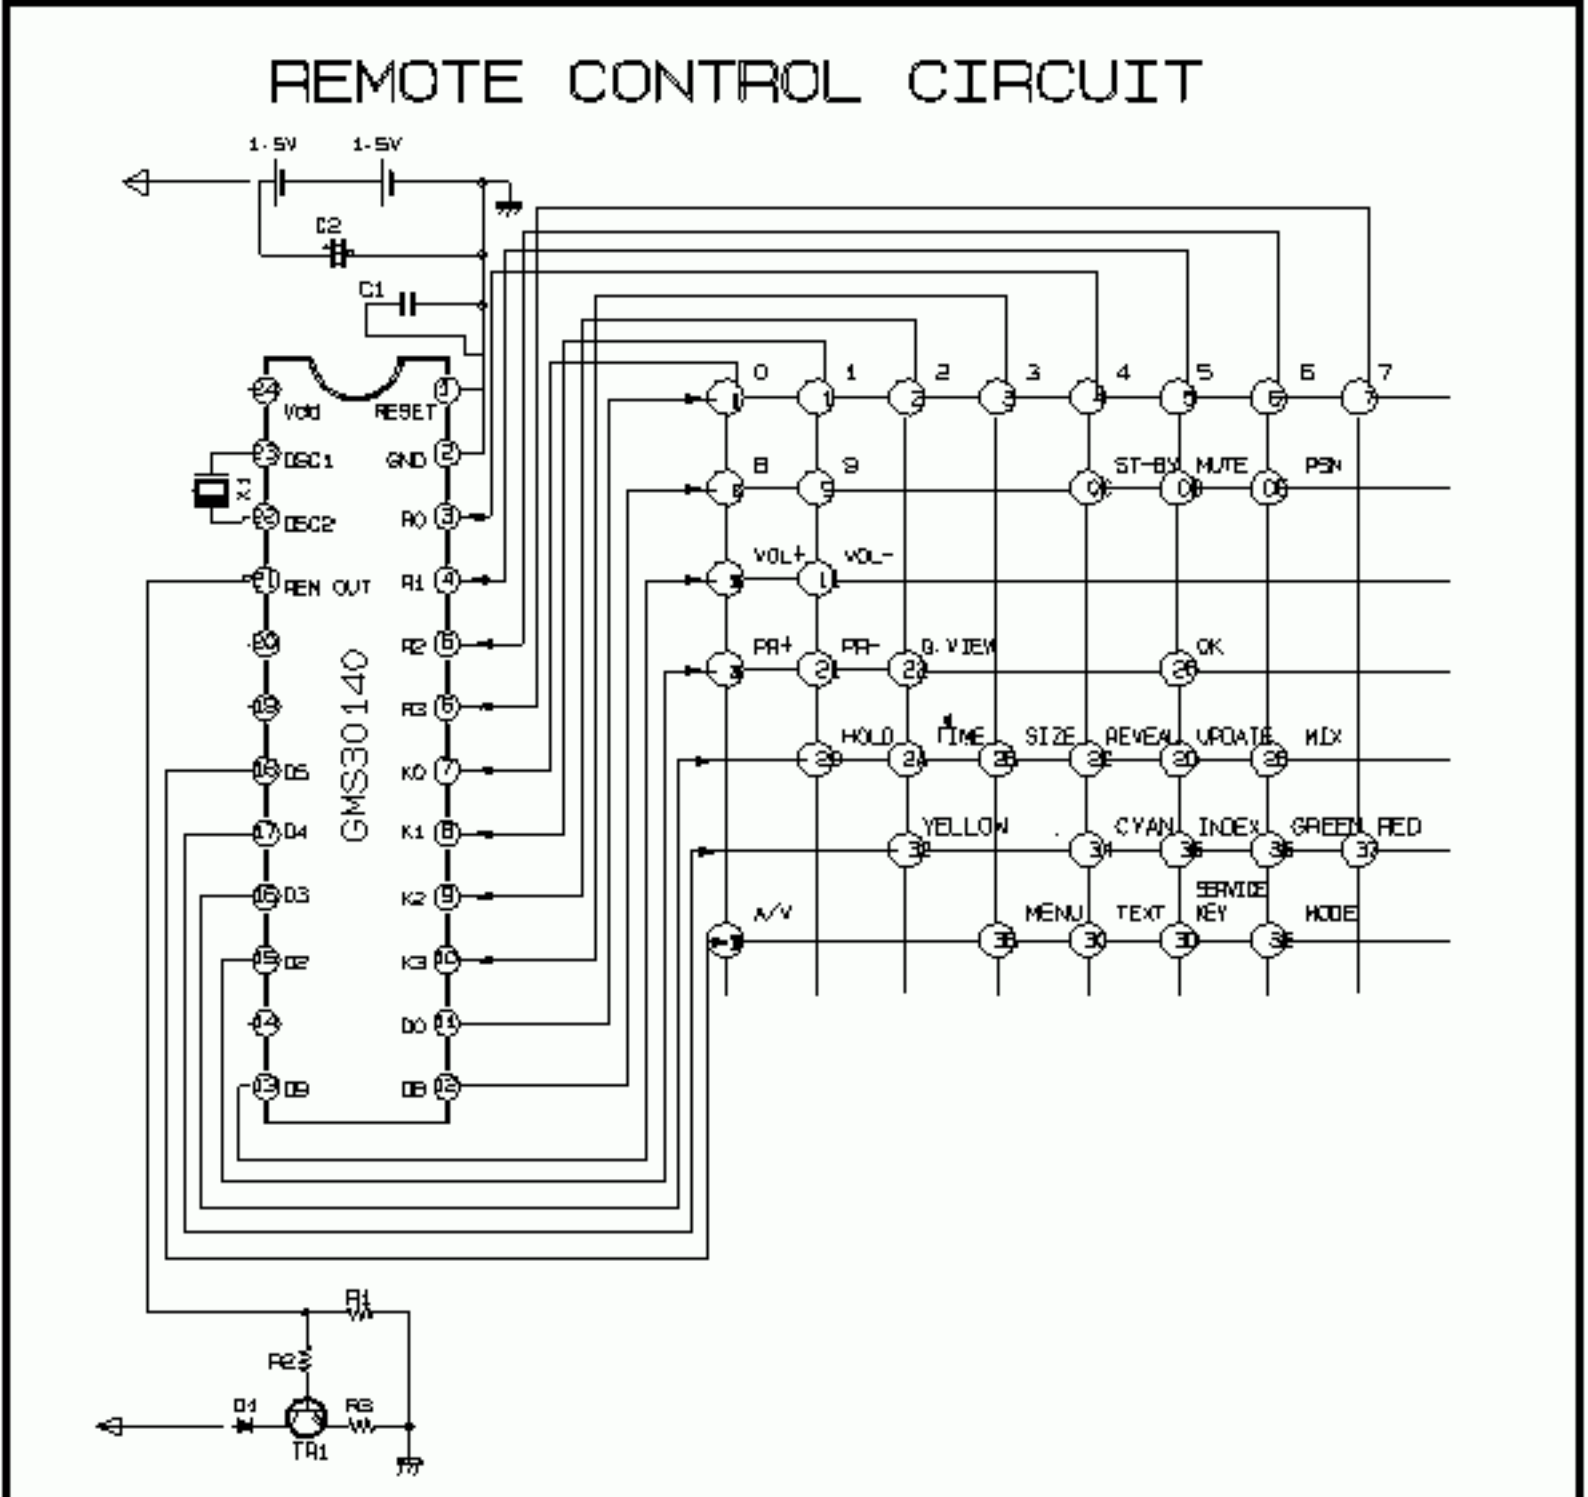


Service Sheet of PC-81A

P/N : 3854VA0042A-S
DATE : 98.10.10

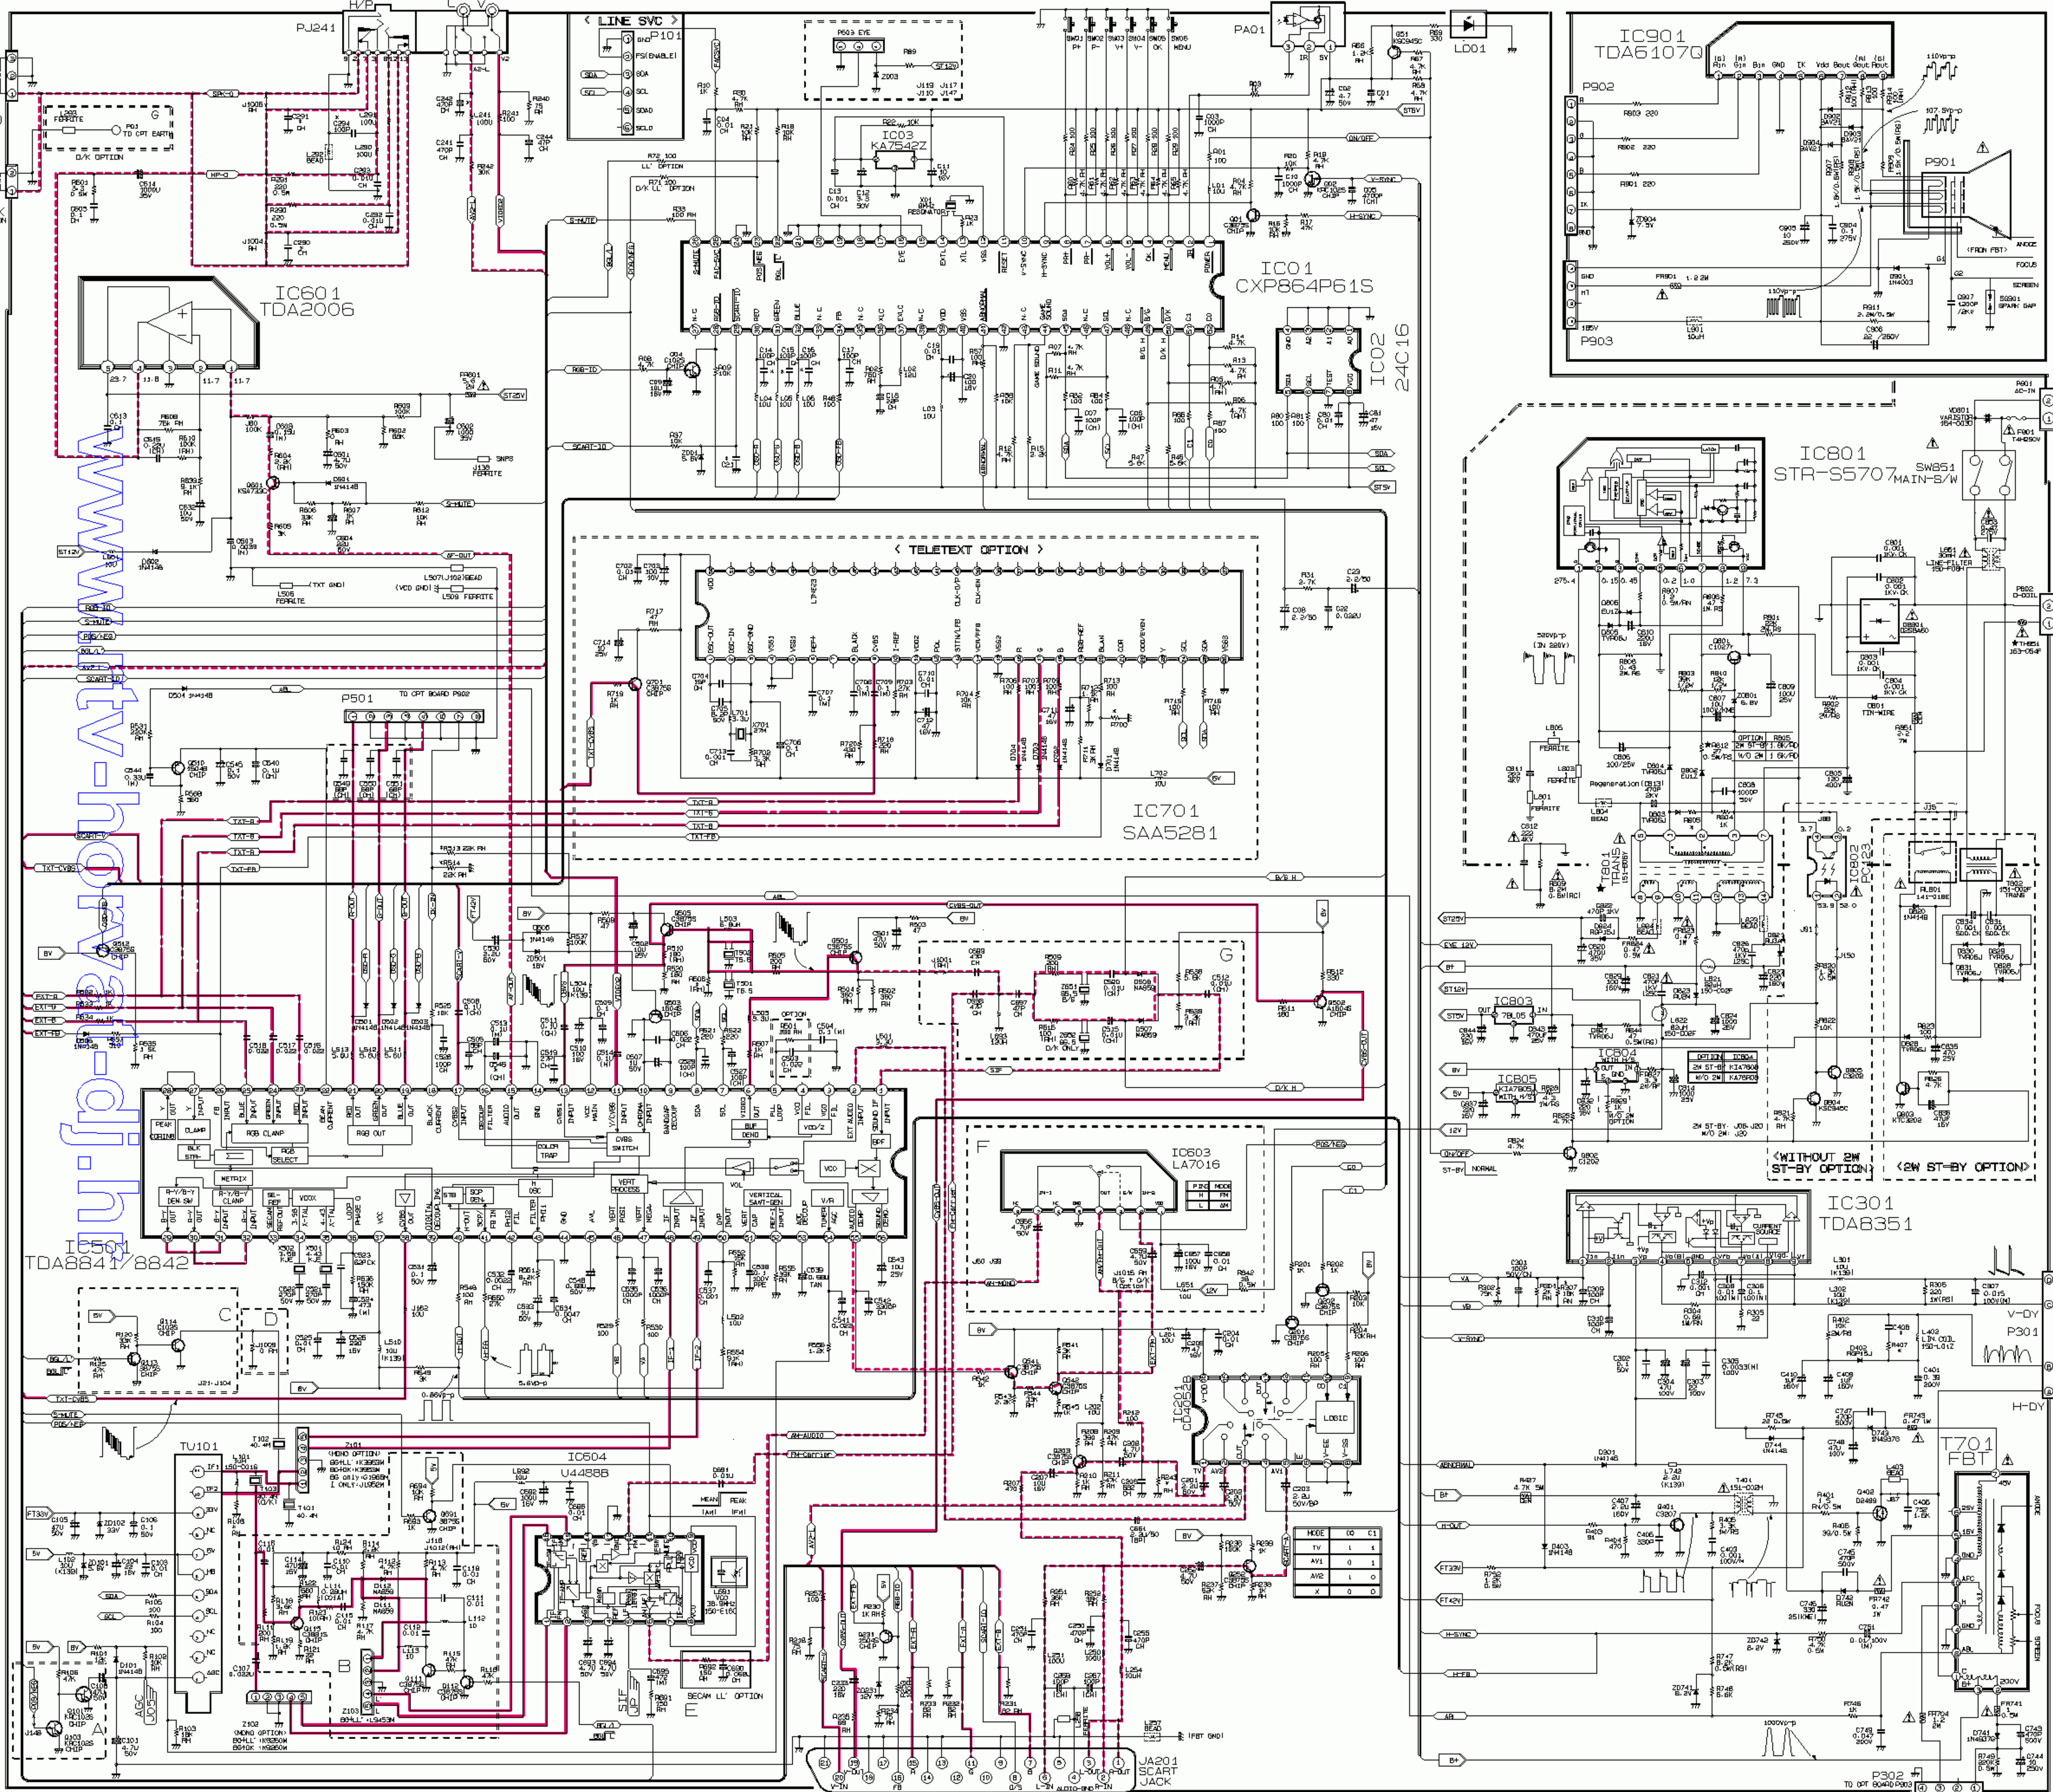

ВНИМАНИЕ!!!Эта схема НЕ предназначена для продажи на дисках.Схему можно свободно получить на сайте www.radiolom.by.ru (www.hot.ee/juden001/).Если Вы её купили на болванке,то Вас капитально наебли!Не поддерживайте этих пилюлов-топковцев краленным!!!

★ TABLE OF INCH CONVERSION

INCH	MM
1/16	1.6
1/8	3.2
1/4	6.4
3/8	9.6
1/2	12.8
5/8	16.0
3/4	19.2
7/8	22.4
1	25.6

★ TABLE OF TR CONVERSION

TR	MM
1/16	1.6
1/8	3.2
1/4	6.4
3/8	9.6
1/2	12.8
5/8	16.0
3/4	19.2
7/8	22.4
1	25.6

NOTICE
Since this is basic circuit diagram, the value of components and some details connection are subject to be changed for improvement without notice.

Value of resistor, capacitor and inductor
1. Resistor are shown in ohm, K=1,000, M=1,000,000.
2. Unless otherwise noted in schematic, all capacitor values less than 1 are expressed in pF and the values more than 1 in uF.
3. Unless otherwise noted in schematic, all inductor values more than 1 are expressed in mH and the values less than 1 in mH.

Observation of voltages and waveforms
1. Voltages read with VOM from point to common ground.
2. Waveforms are taken using a wide band oscilloscope and a low capacity probe.
3. All waveforms are taken using a standard color signal.
4. Check FINE TUNING, AGC, CONTRAST, BRIGHTNESS and COLOR controls for best picture. Make sure that COLOR and BRIGHTNESS are in response and CONTRAST is in 75%.

Video
Audio
Chroma