


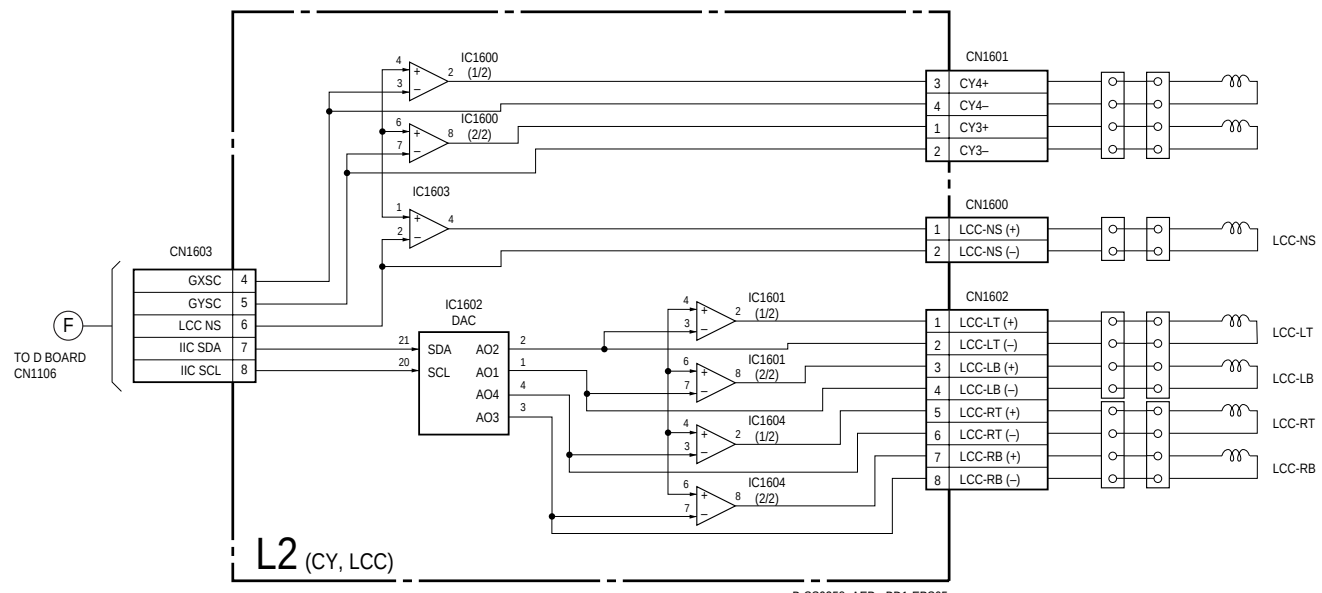
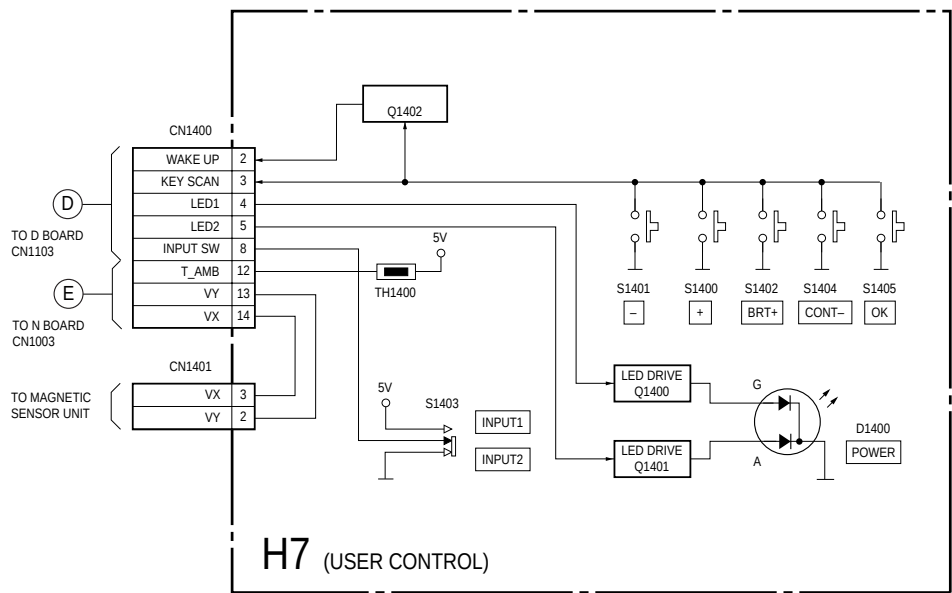
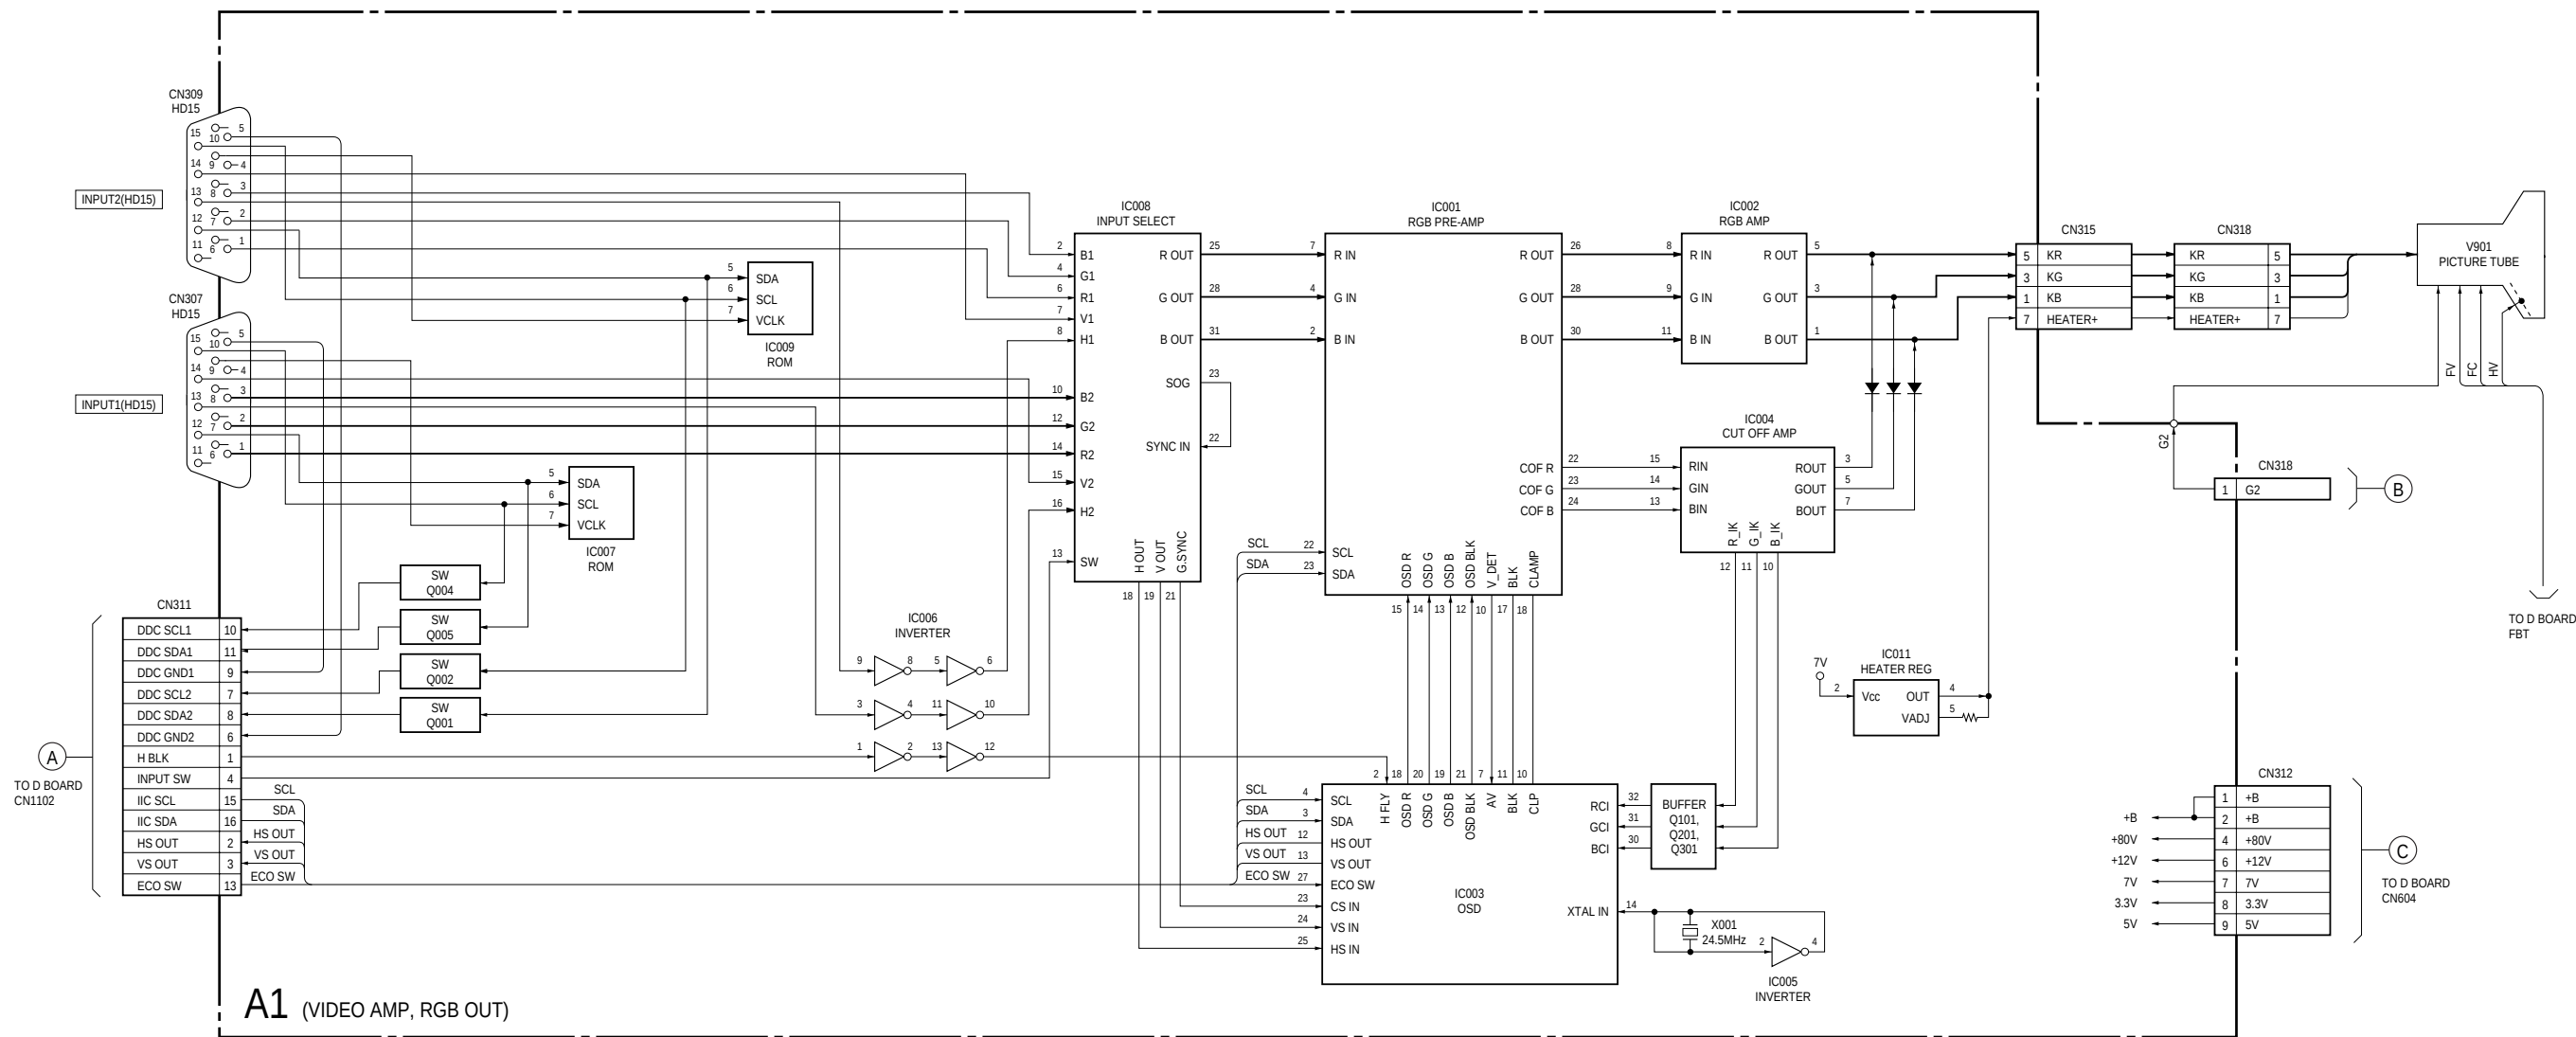



4-1. BLOCK DIAGRAMS

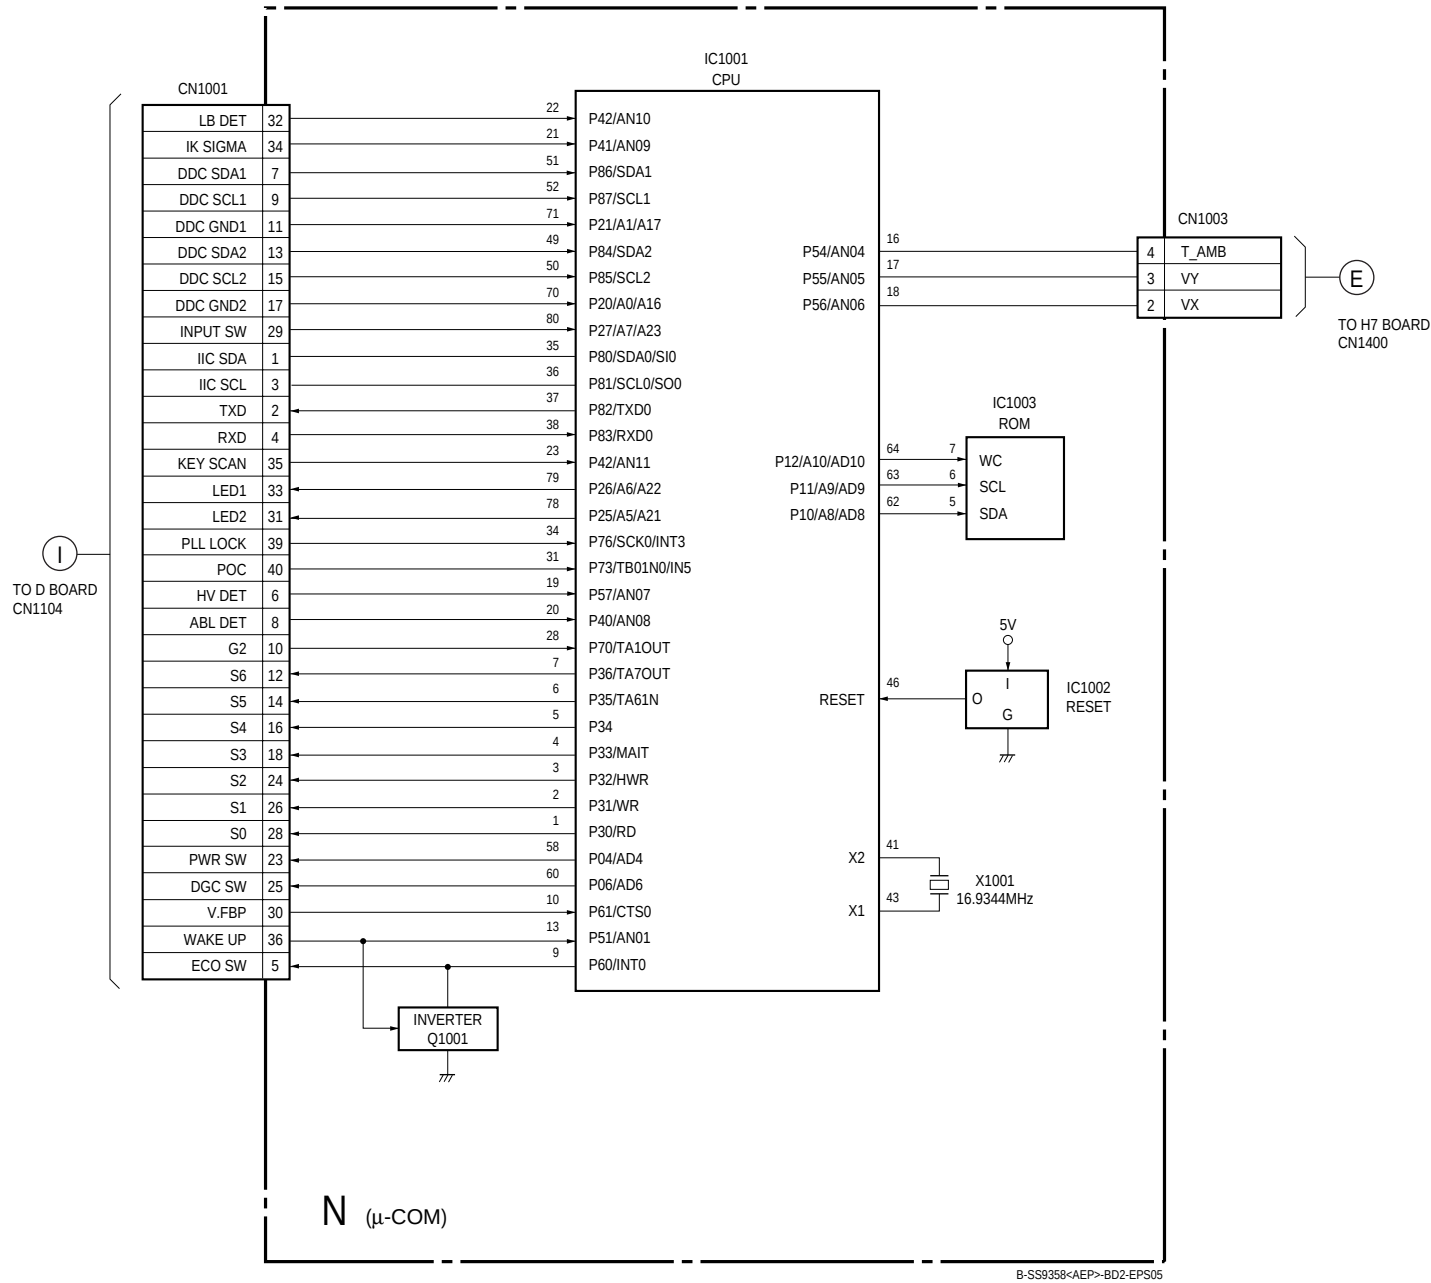

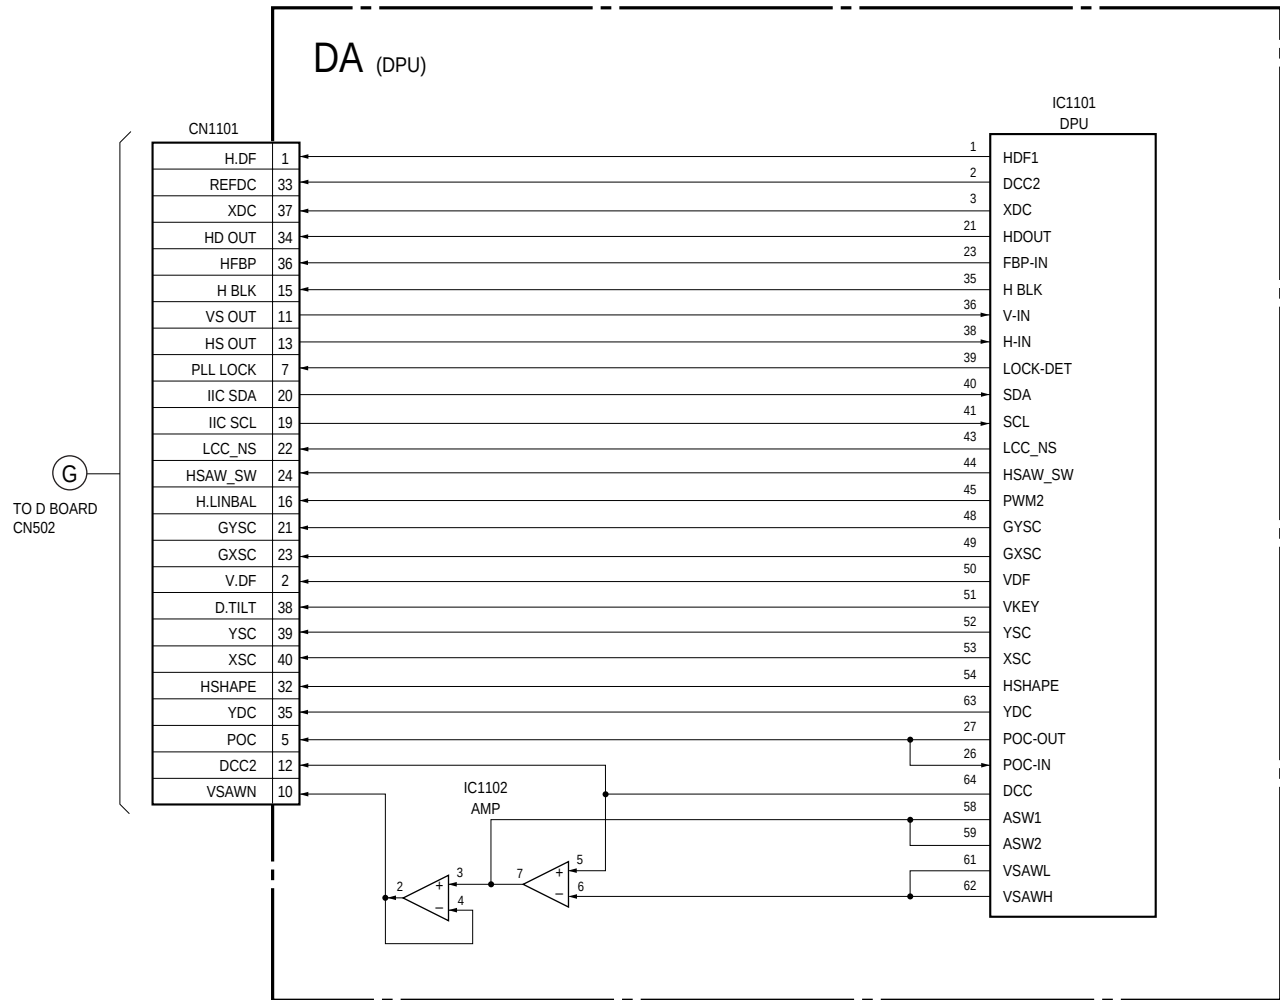



FRAME SCHEMATIC DIAGRAM

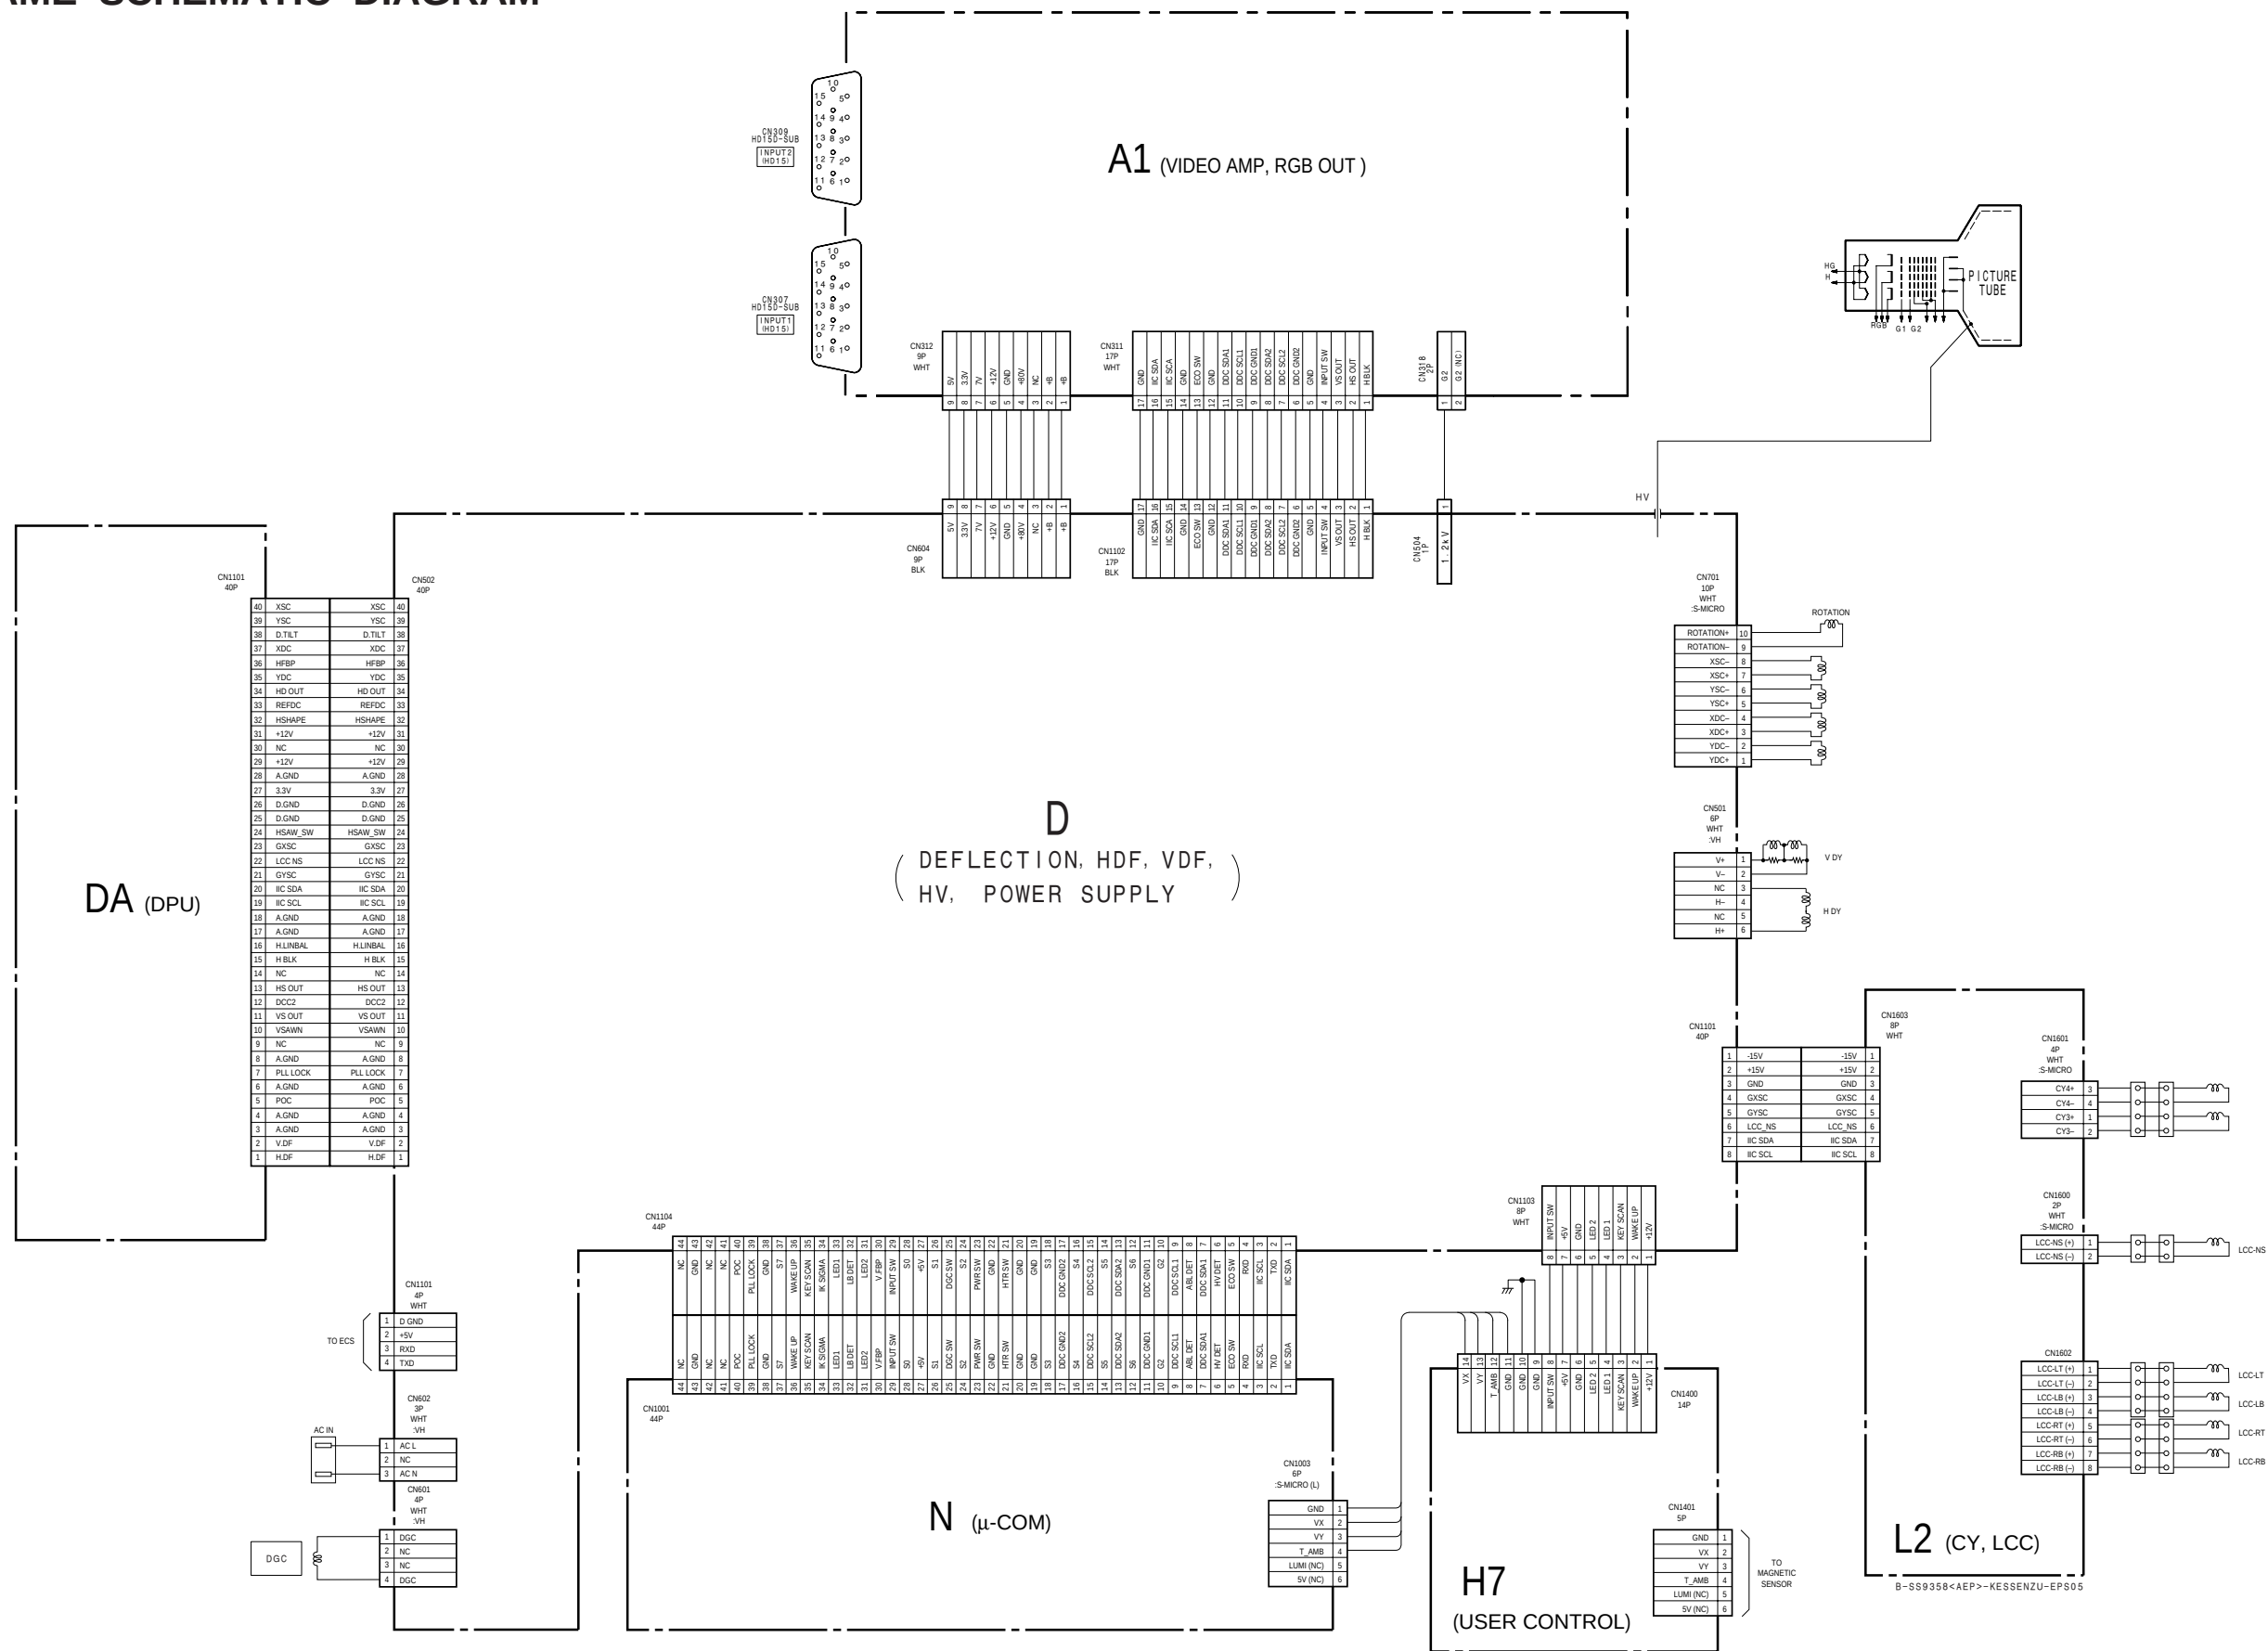

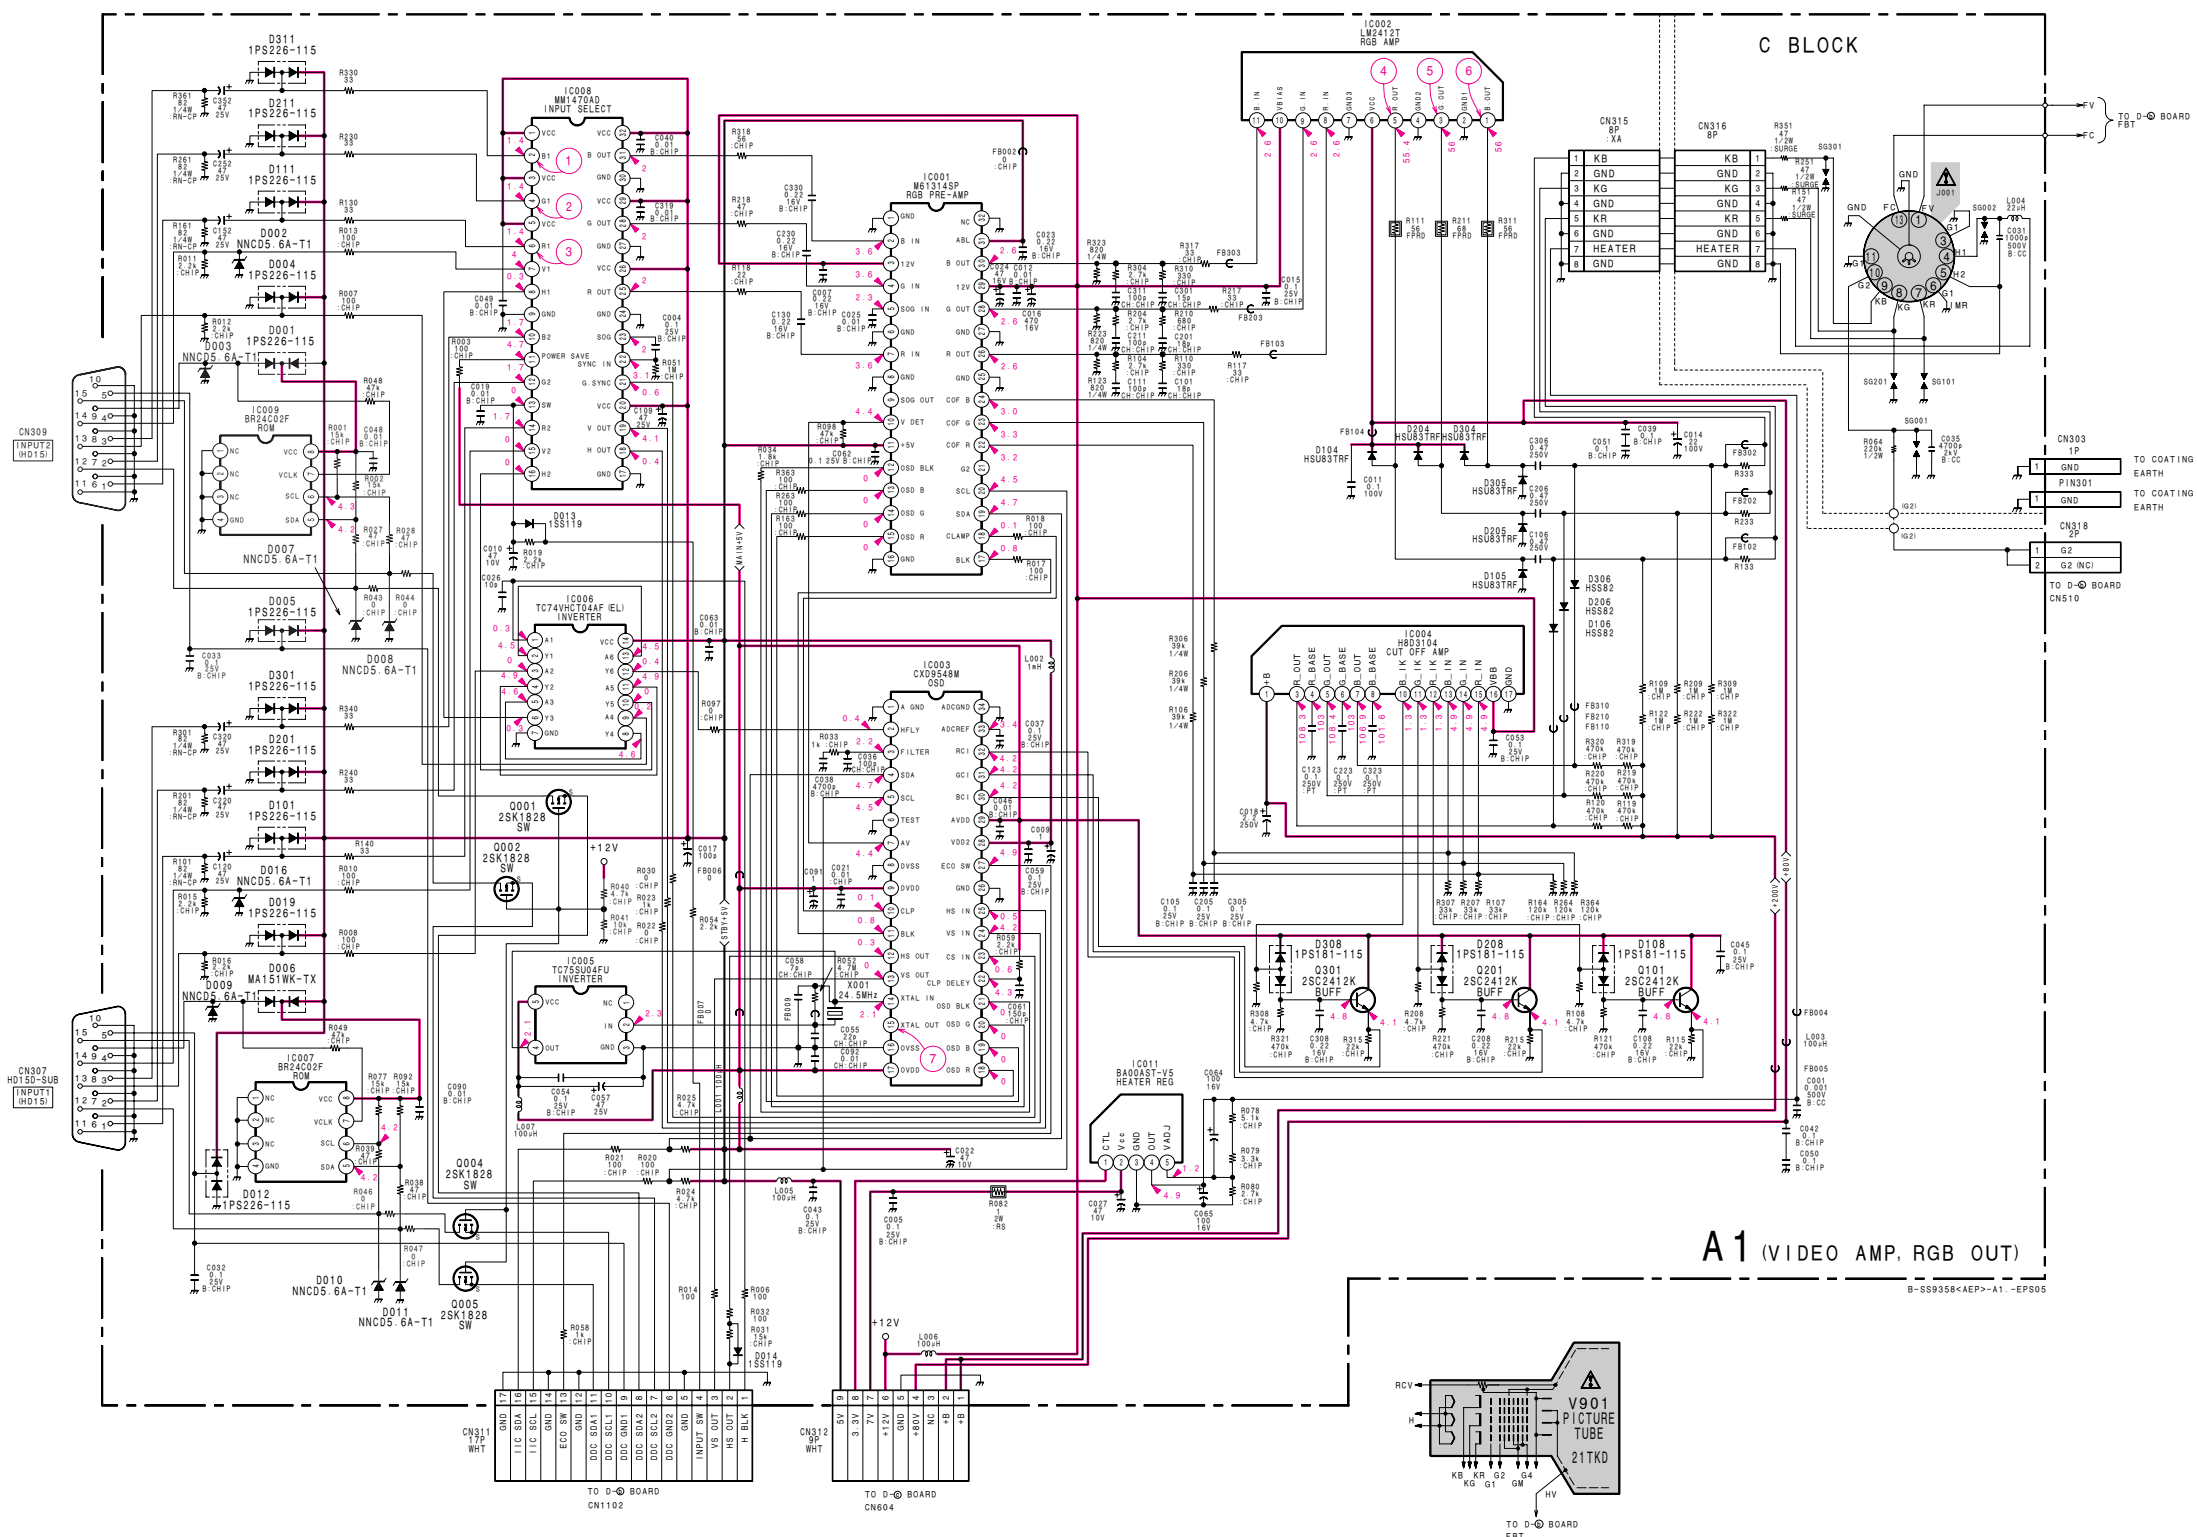


• A1 BOARD WAVEFORMS

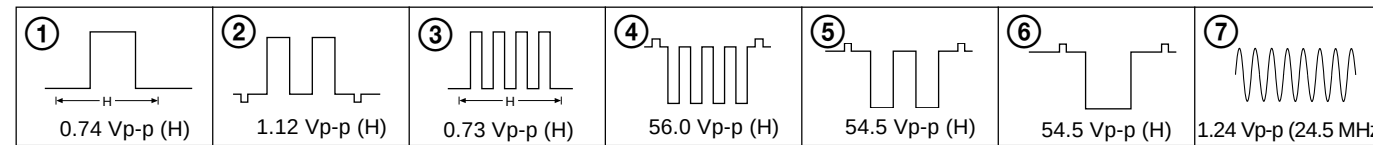

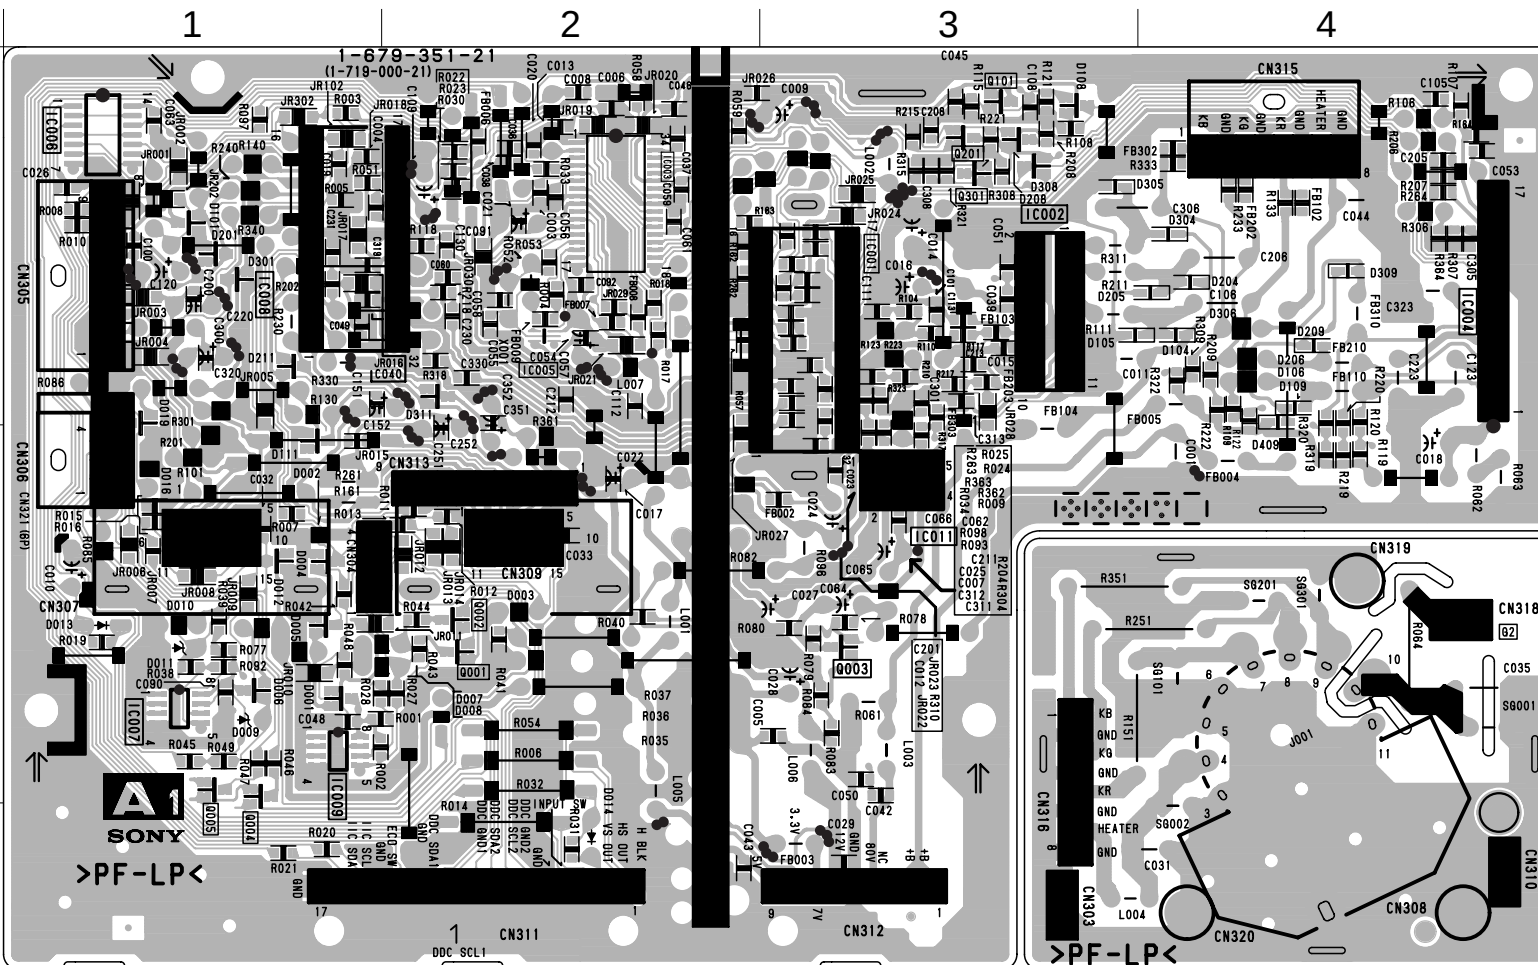SEMICONDUCTOR
LOCATION

IC		
IC001	A-3	
IC002	A-3	
IC003	A-2	
IC004	A-4	
IC005	A-2	
IC006	A-1	
IC007	B-1	
IC008	A-1	
IC009	B-1	
IC011	B-3	
TRANSISTOR		
		*
Q001	B-1	①
Q002	B-1	①
Q004	B-1	①
Q005	B-1	①
Q101	A-3	①
Q201	A-3	①
Q301	A-3	①
DIODE		
D002	B-1	-
D004	B-1	⑥
D006	B-1	⑧
D009	B-1	-
D010	B-1	-
D011	B-1	-
D012	B-1	⑥
D013	B-1	-
D014	C-2	-
D016	B-1	-
D019	A-1	⑥
D101	A-1	⑥
D104	A-4	③
D105	A-3	③
D106	A-4	-
D108	A-3	⑩
D111	B-1	⑥
D201	A-1	⑥
D204	A-4	②
D205	A-3	③
D206	A-4	-
D208	A-3	⑩
D211	A-1	⑥
D301	A-1	⑥
D304	A-4	③
D305	A-3	③
D306	A-4	-
D308	A-3	⑩
D311	A-2	⑥
CRYSTAL		
X001	A-2	

*: Refer to Terminal name of
semiconductors in silk screen
printed circuit (see page 4-7)



NOTE:

The circuit indicated as left contains high voltage of over 600 Vp-p. Care must be paid to prevent an electric shock in inspection or repairing.

- Divided circuit diagram


a b 1

Ref. No.


Circuit diagram division code

Figure 1 displays six waveforms labeled 1 through 6, showing different signal characteristics:


- Waveform 1: 0.71 Vp-p (H)
- Waveform 2: 11.3 Vp-p (H)
- Waveform 3: 59.5 Vp-p (V)
- Waveform 4: 1.7 Vp-p (V)
- Waveform 5: 180 Vp-p (H)
- Waveform 6: 640 Vp-p (H)




D-⑥ (HV, HDF, VDF)

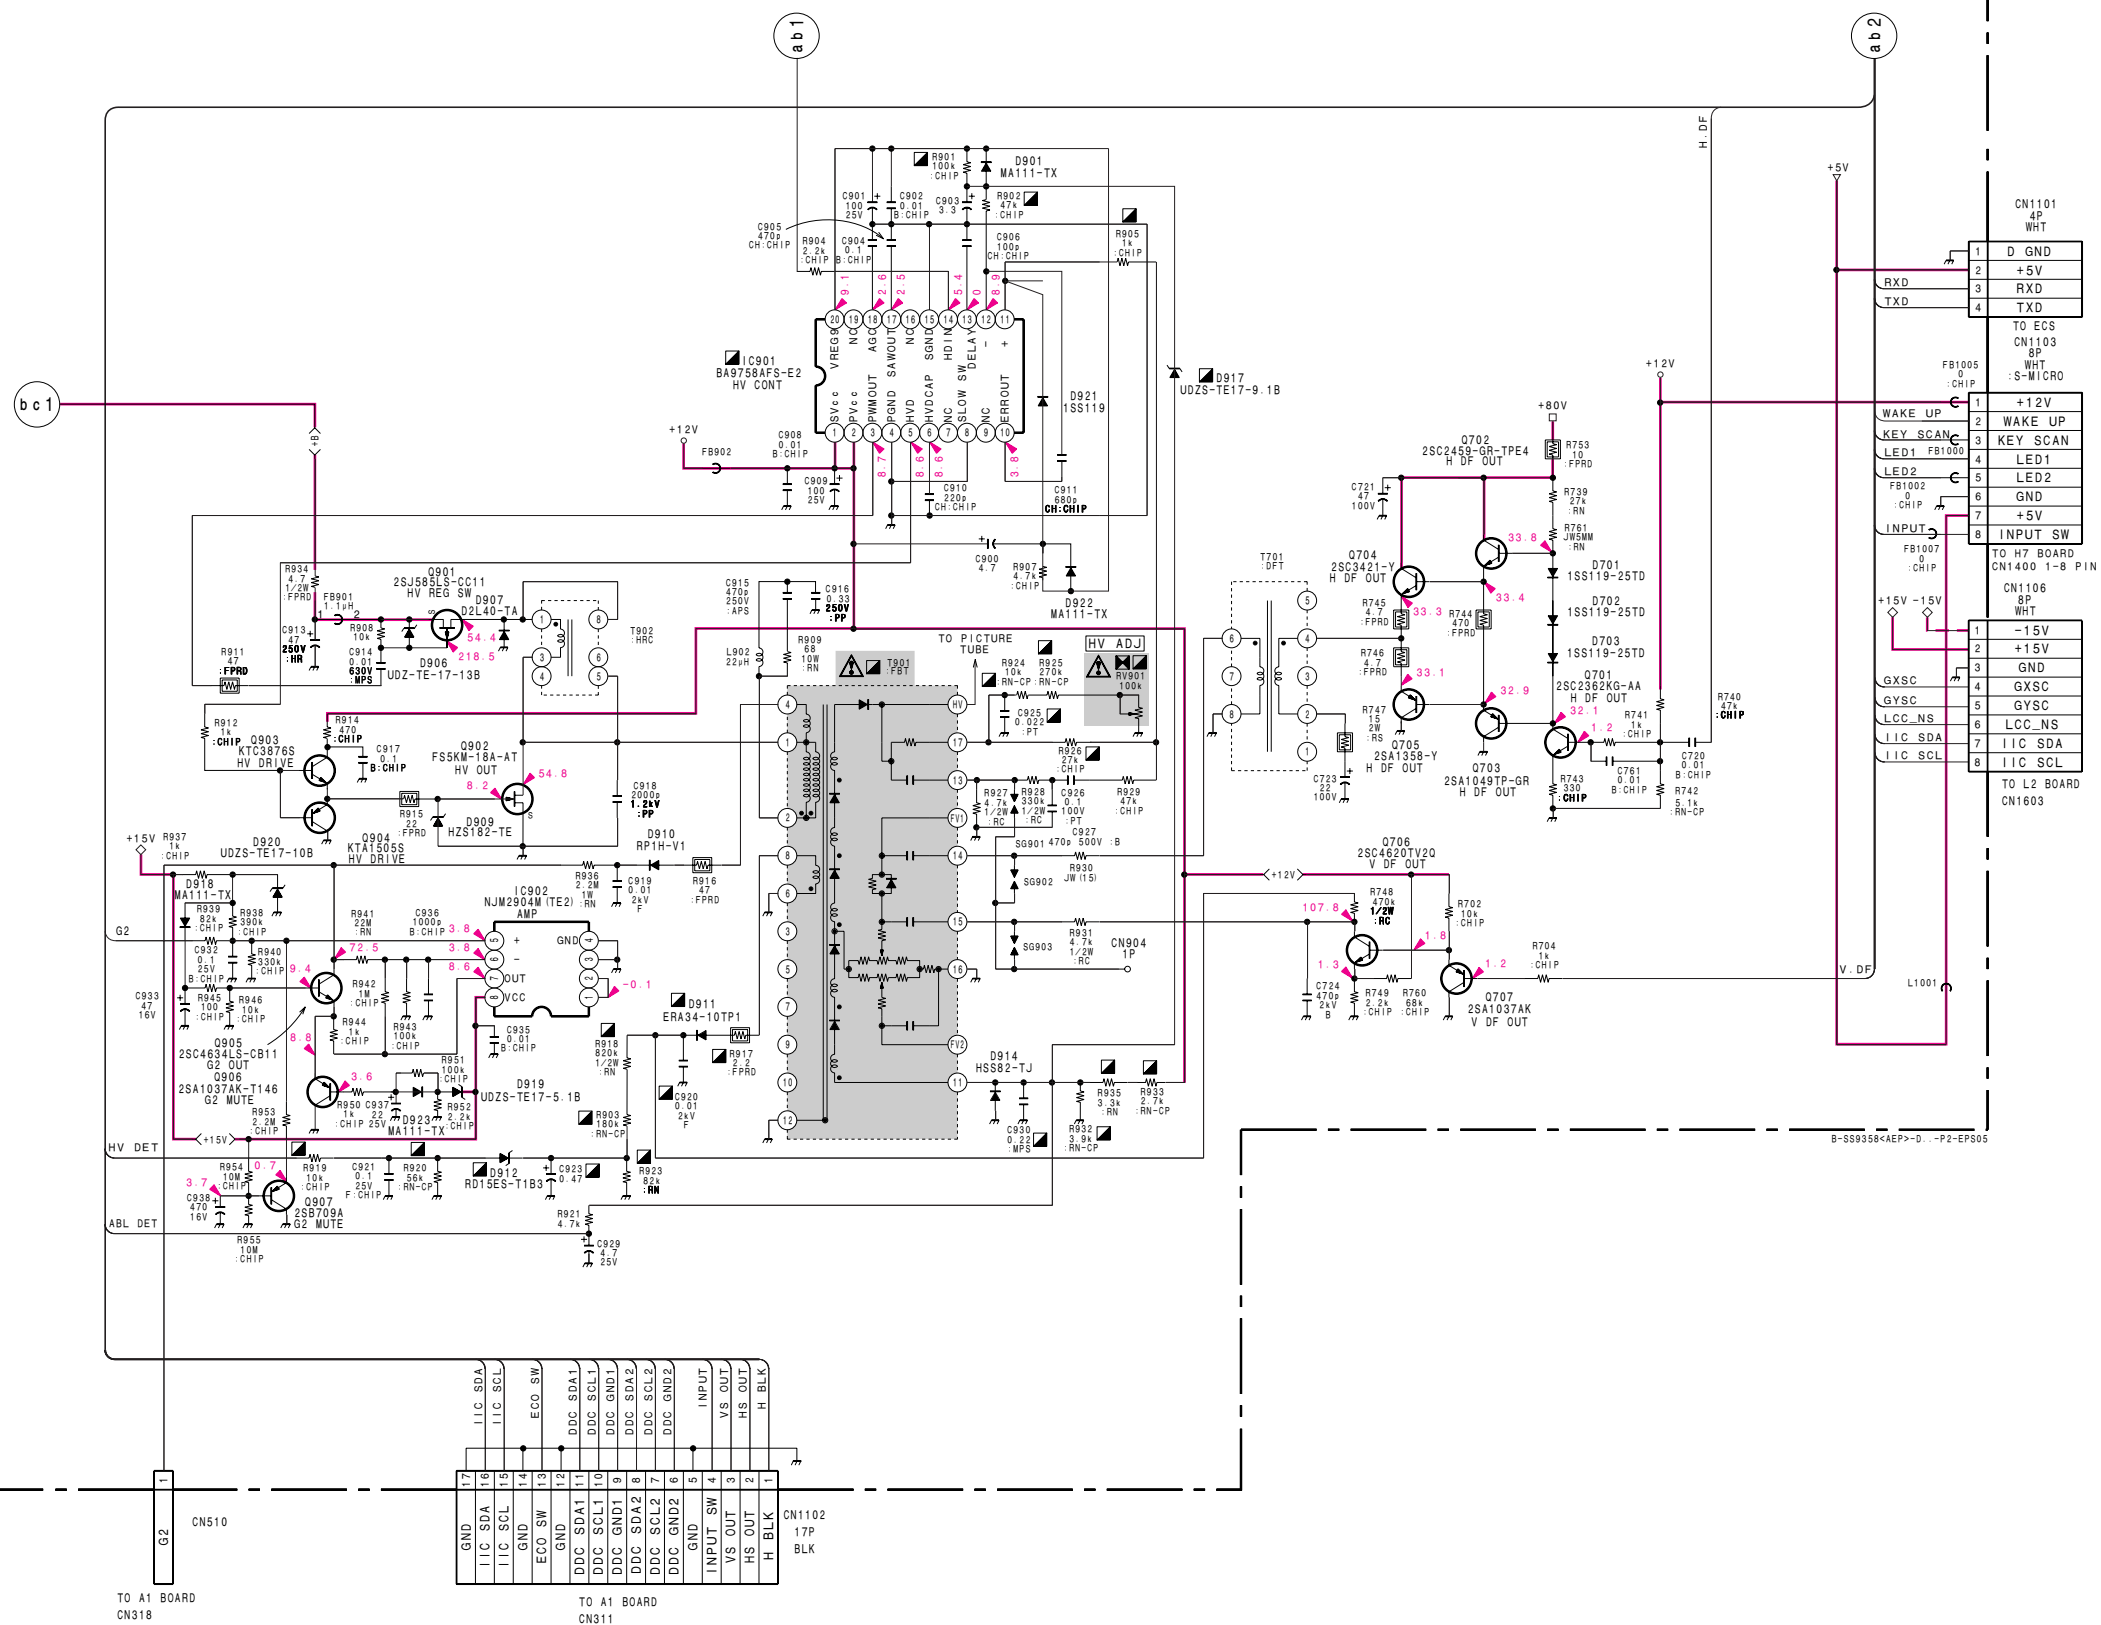


D-Ⓒ (POWER SUPPLY)

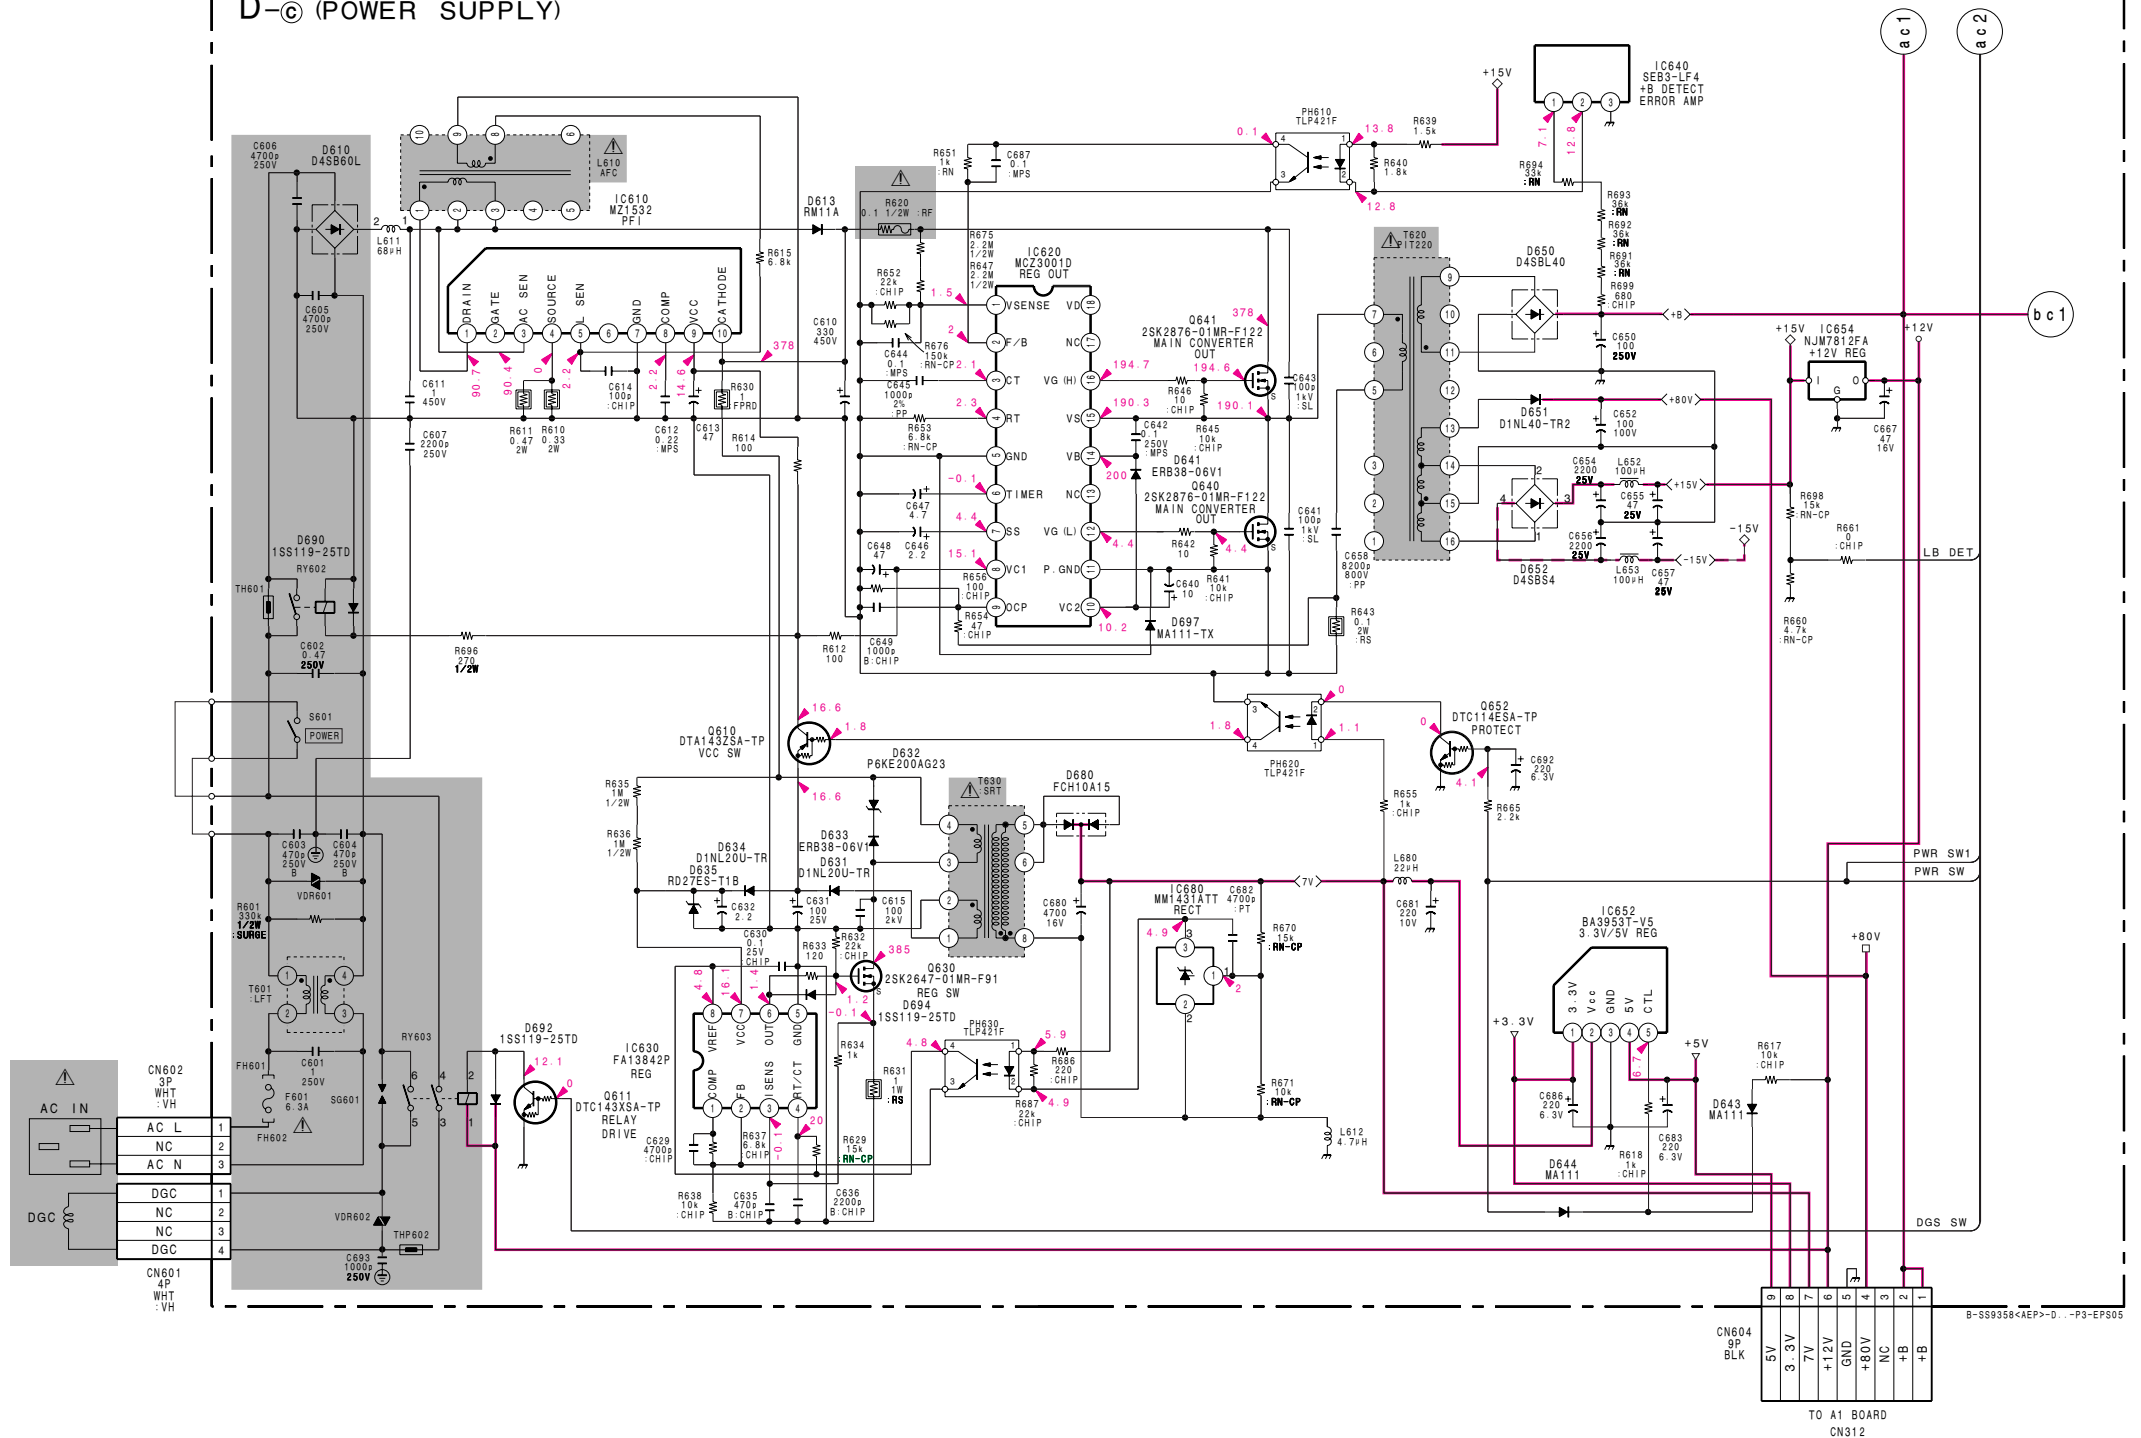

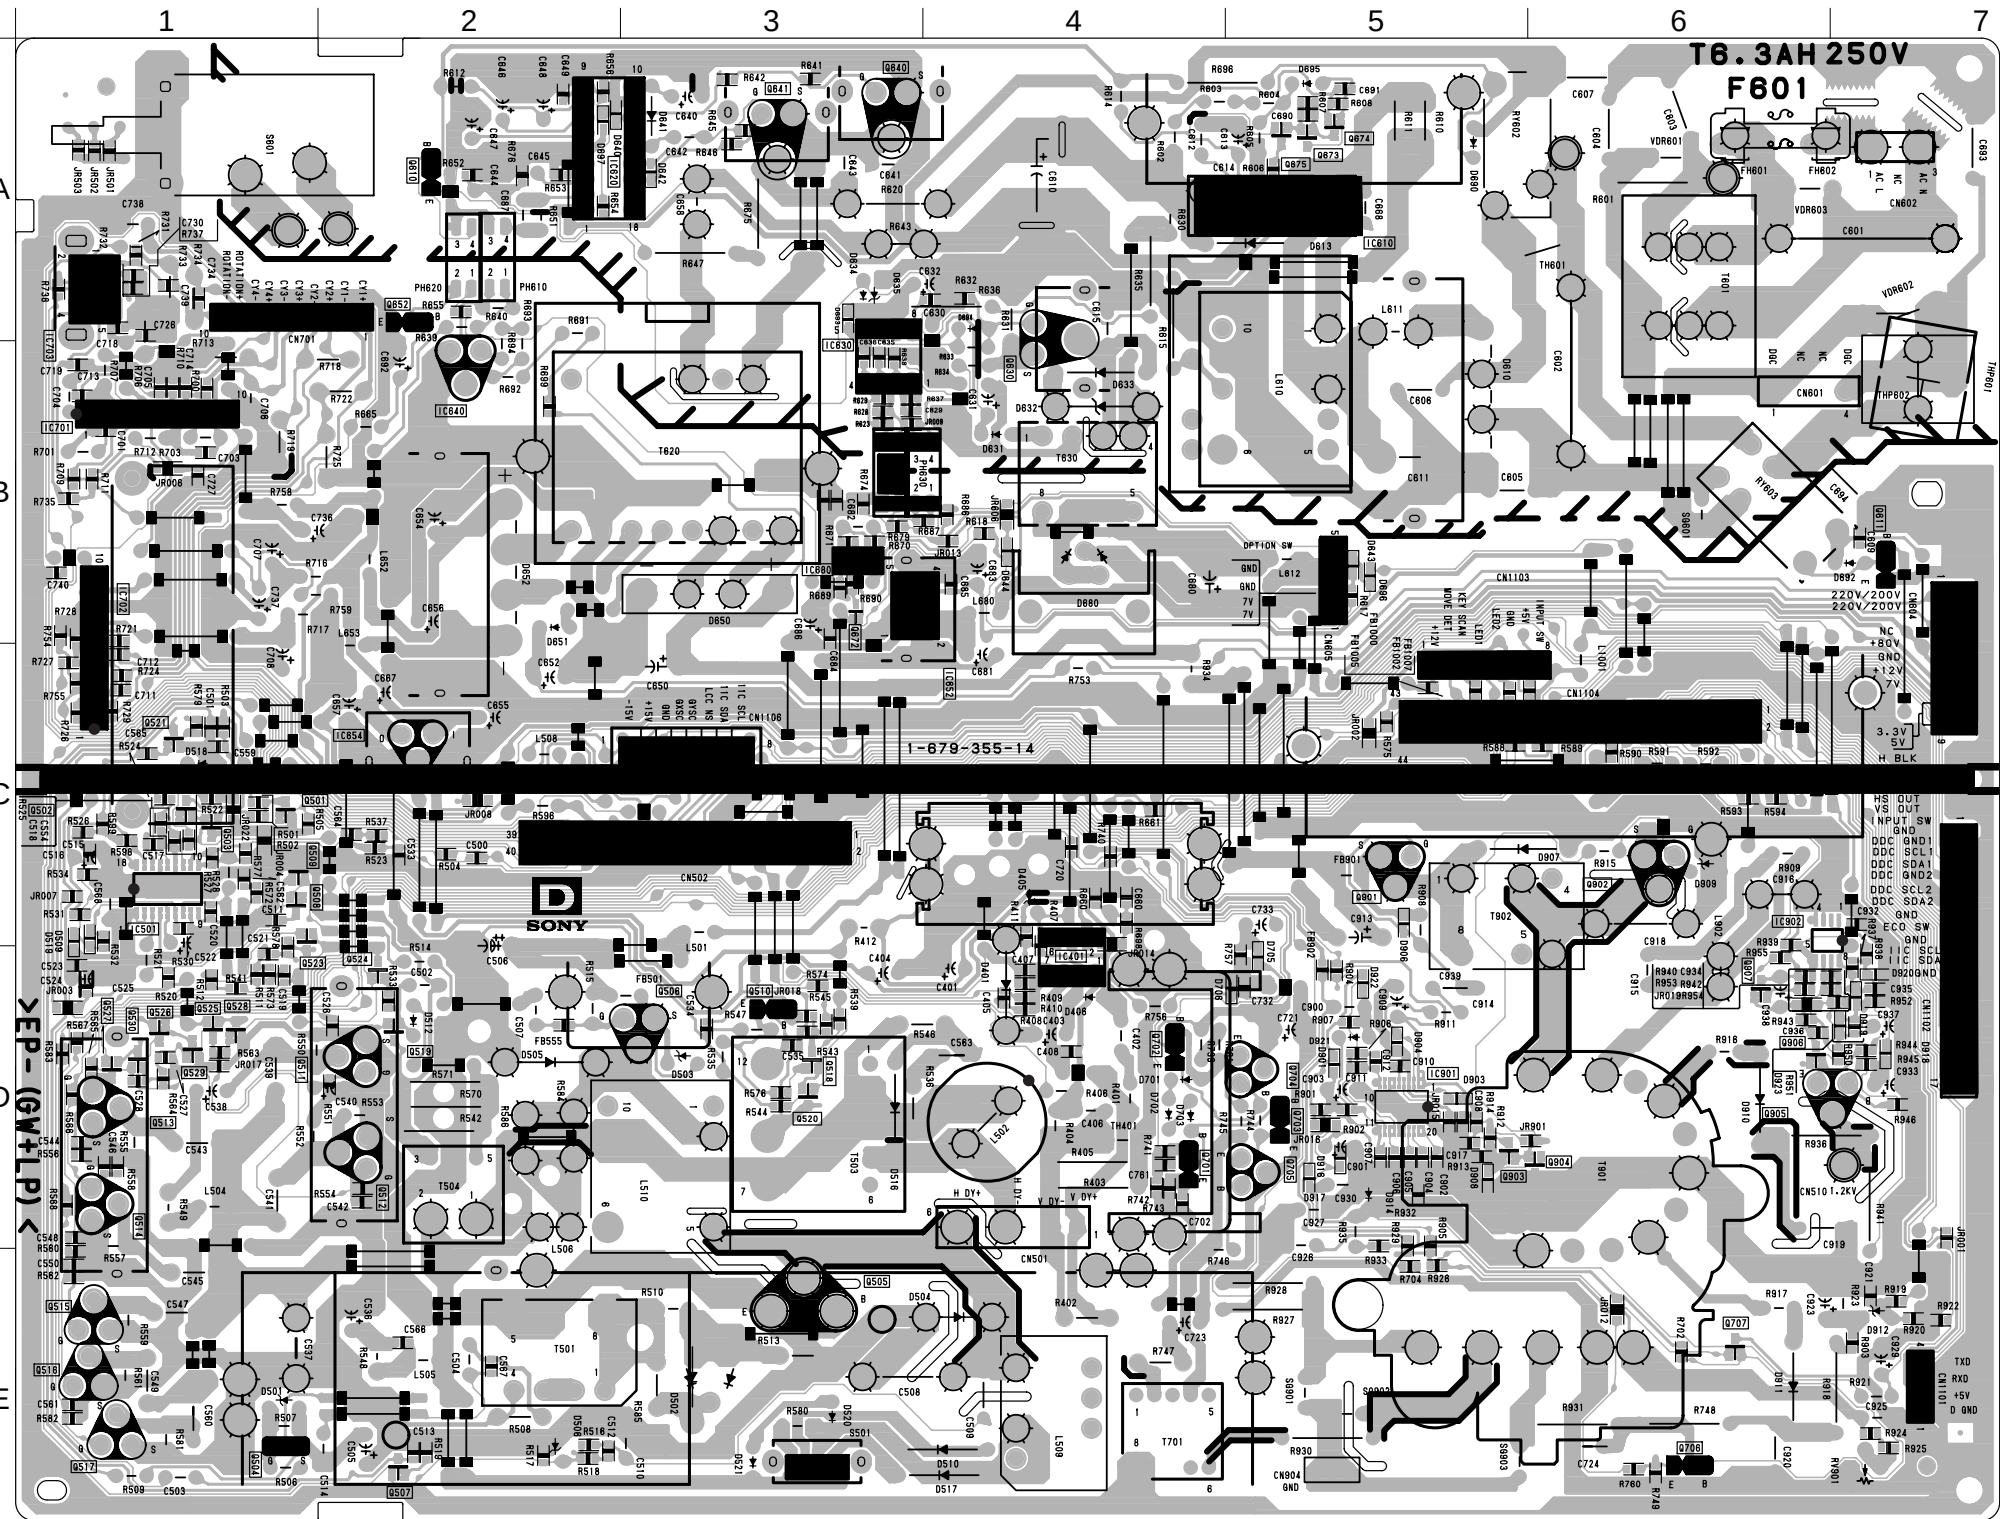


IC		DIODE		
IC401	D-4	D401	D-4	*
IC501	C-1	D405	C-4	-
IC610	A-5	D406	D-4	-
IC620	A-2	D501	E-1	-
IC630	B-3	D502	E-3	-
IC640	B-2	D503	D-3	-
IC652	B-3	D504	E-4	-
IC654	C-2	D505	D-2	-
IC680	B-3	D506	E-2	-
IC701	B-1	D509	C-1	③
IC702	B-1	D510	E-4	-
IC703	A-1	D512	D-2	-
IC901	D-5	D516	D-3	-
IC902	C-6	D517	E-4	-
TRANSISTOR		D518	C-1	-
Q501	C-1	D519	C-1	③
		D520	E-3	-
Q502	C-1	D521	E-3	-
Q503	C-1	D610	B-5	-
Q504	E-1	D613	A-5	-
Q505	E-3	D631	B-4	-
Q506	D-3	D632	B-4	-
Q507	E-2	D633	B-4	-
Q508	C-1	D634	A-3	-
Q509	C-1	D635	A-3	-
Q510	D-3	D641	B-5	③
Q511	D-2	D644	B-4	③
Q512	D-2	D650	B-3	-
Q513	D-1	D651	B-2	-
Q514	D-1	D652	B-2	-
Q515	E-1	D680	B-4	-
Q516	E-1	D690	A-5	-
Q517	E-1	D692	B-7	-
Q519	D-2	D694	A-4	-
Q521	C-1	D697	A-2	③
Q523	C-1	D701	D-4	-
Q524	D-2	D702	D-4	-
Q610	A-2	D703	D-4	-
Q611	B-7	D705	C-5	③
Q630	B-4	D706	D-4	③
Q640	A-3	D901	D-5	③
Q641	A-3	D906	C-5	③
Q652	A-2	D907	C-5	-
Q701	D-4	D909	C-6	-
Q702	D-4	D910	D-6	-
Q703	D-5	D911	E-6	-
Q704	D-5	D912	E-7	-
Q705	D-5	D914	D-5	-
Q706	E-6	D917	D-5	③
Q707	E-6	D918	D-7	③
Q901	C-5	D919	D-7	③
Q902	C-6	D920	D-7	③
Q903	D-5	D921	D-5	-
Q904	D-5	D922	D-5	③
Q905	D-6	D923	D-7	③
Q906	D-6	VARIABLE RESISTOR		
Q907	D-6	RV901	E-7	-


DA (DPU)

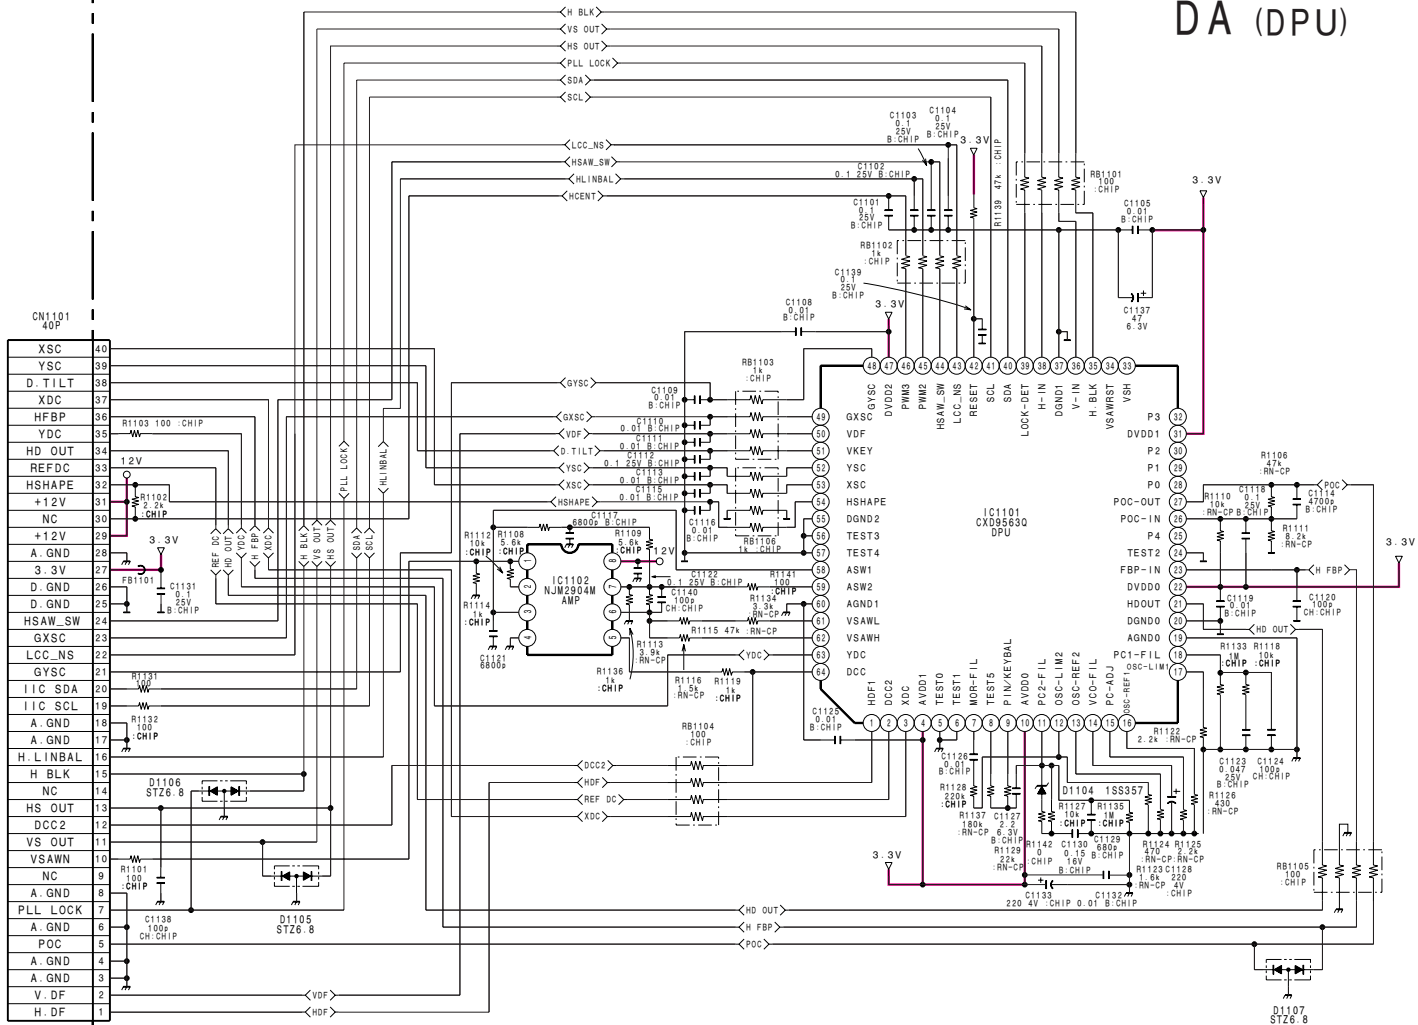


DA BOARD

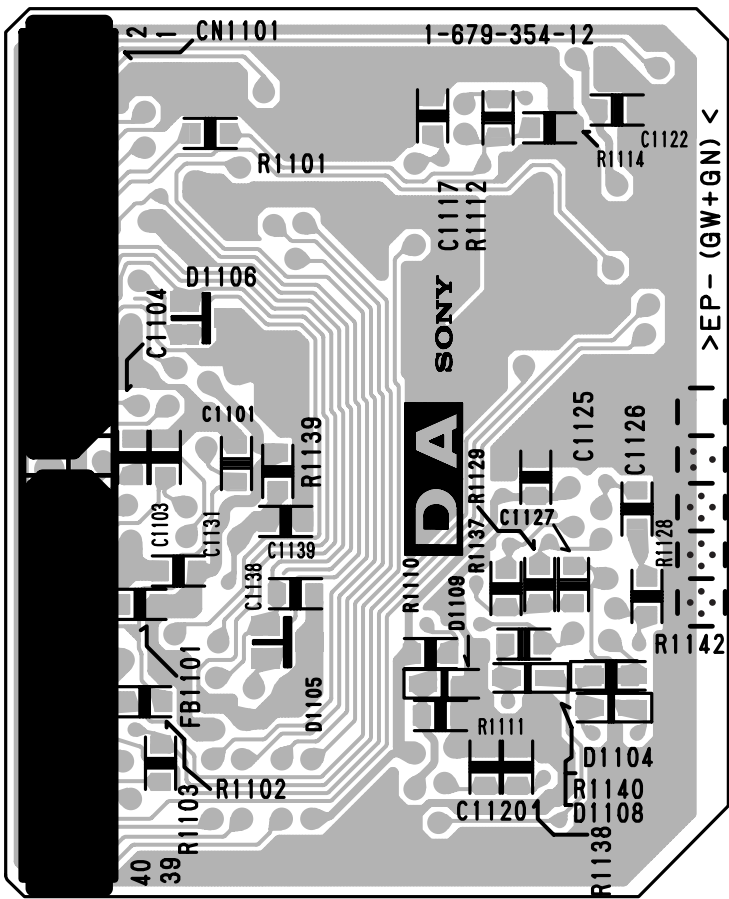


C1123 R1133C1124 R1122 A-1343-936-A

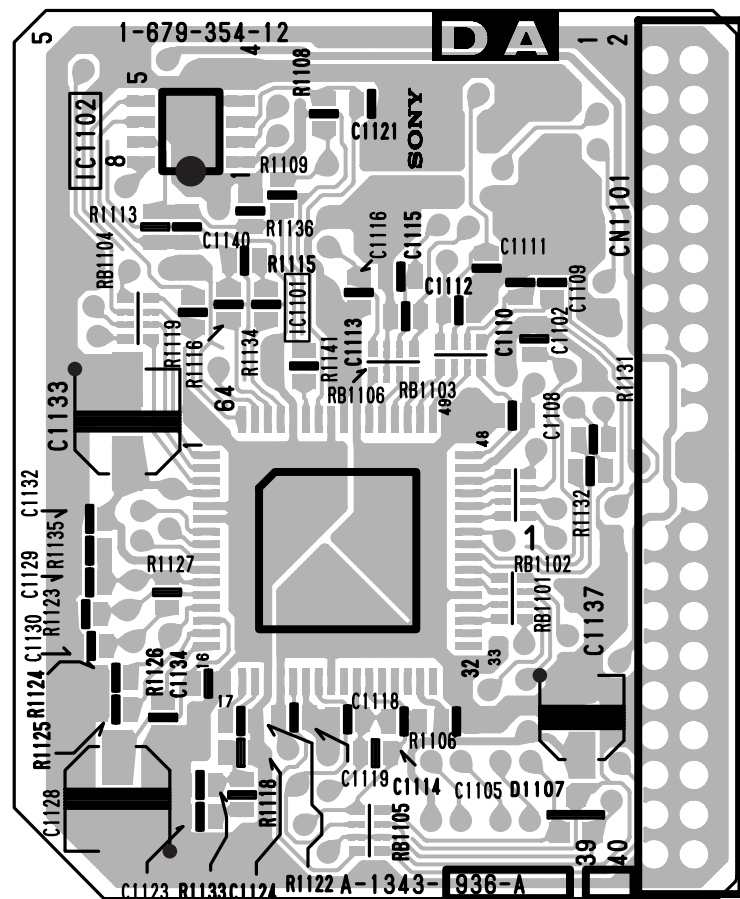


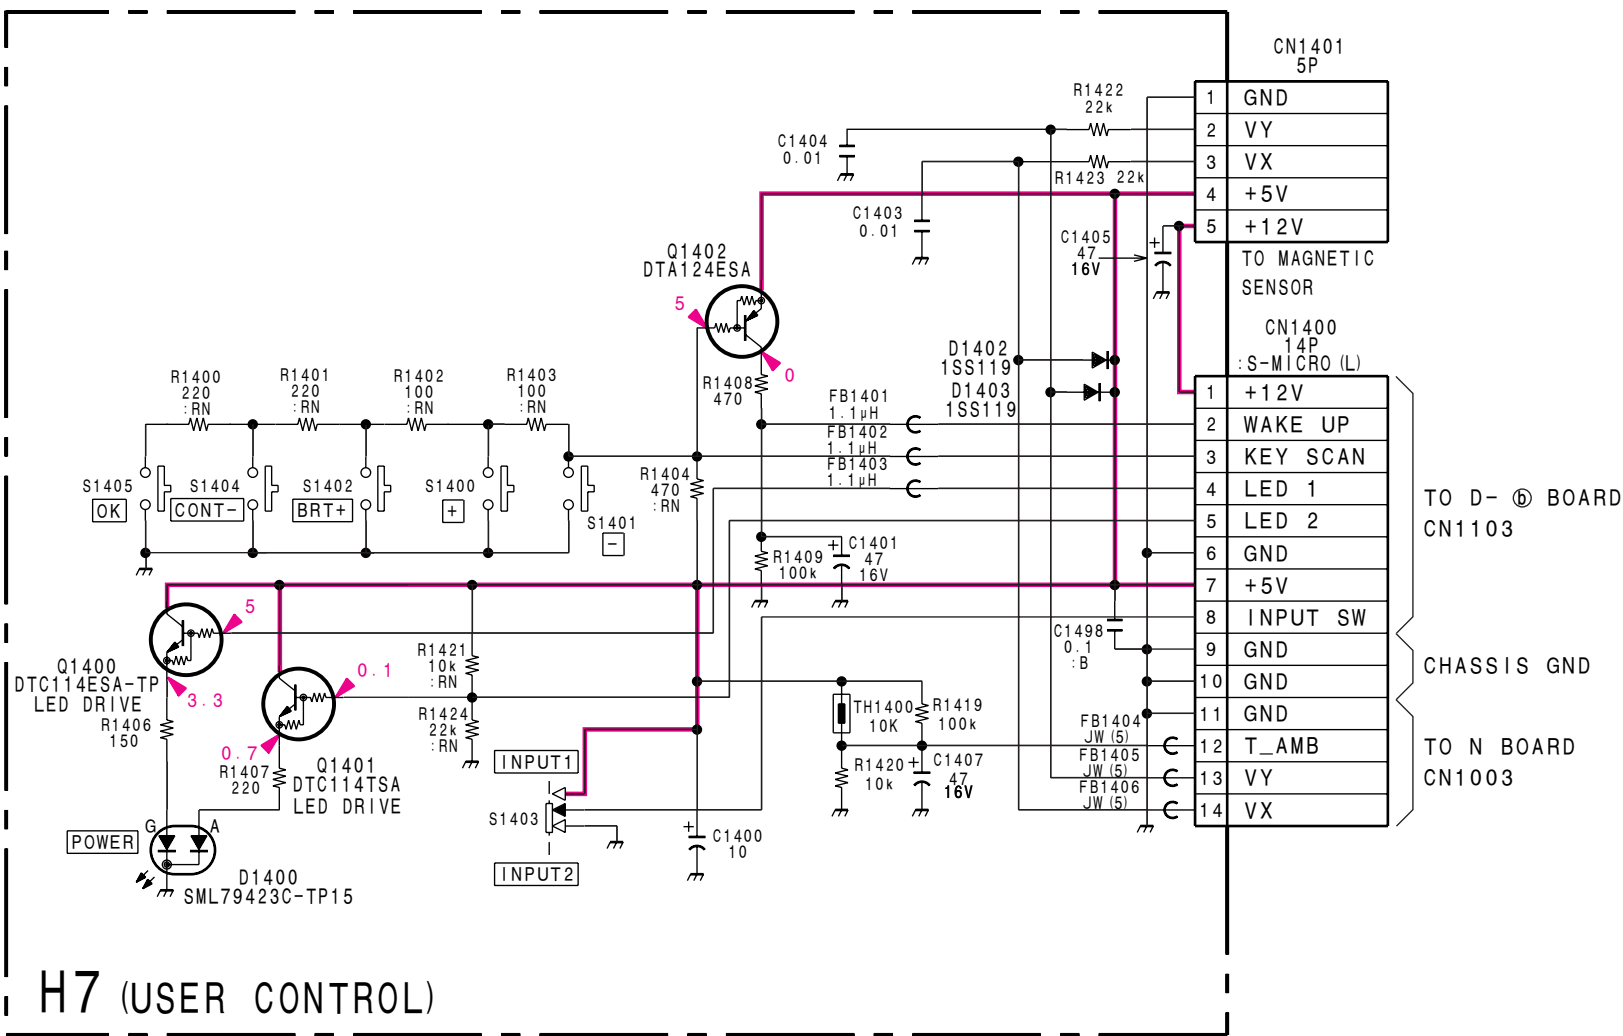

- H7 BOARD -

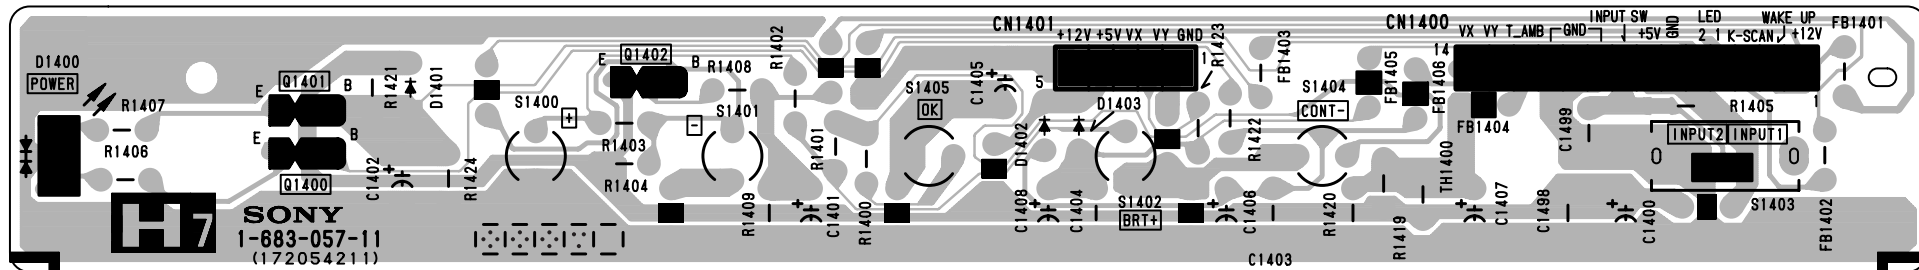


N (μ-COM)

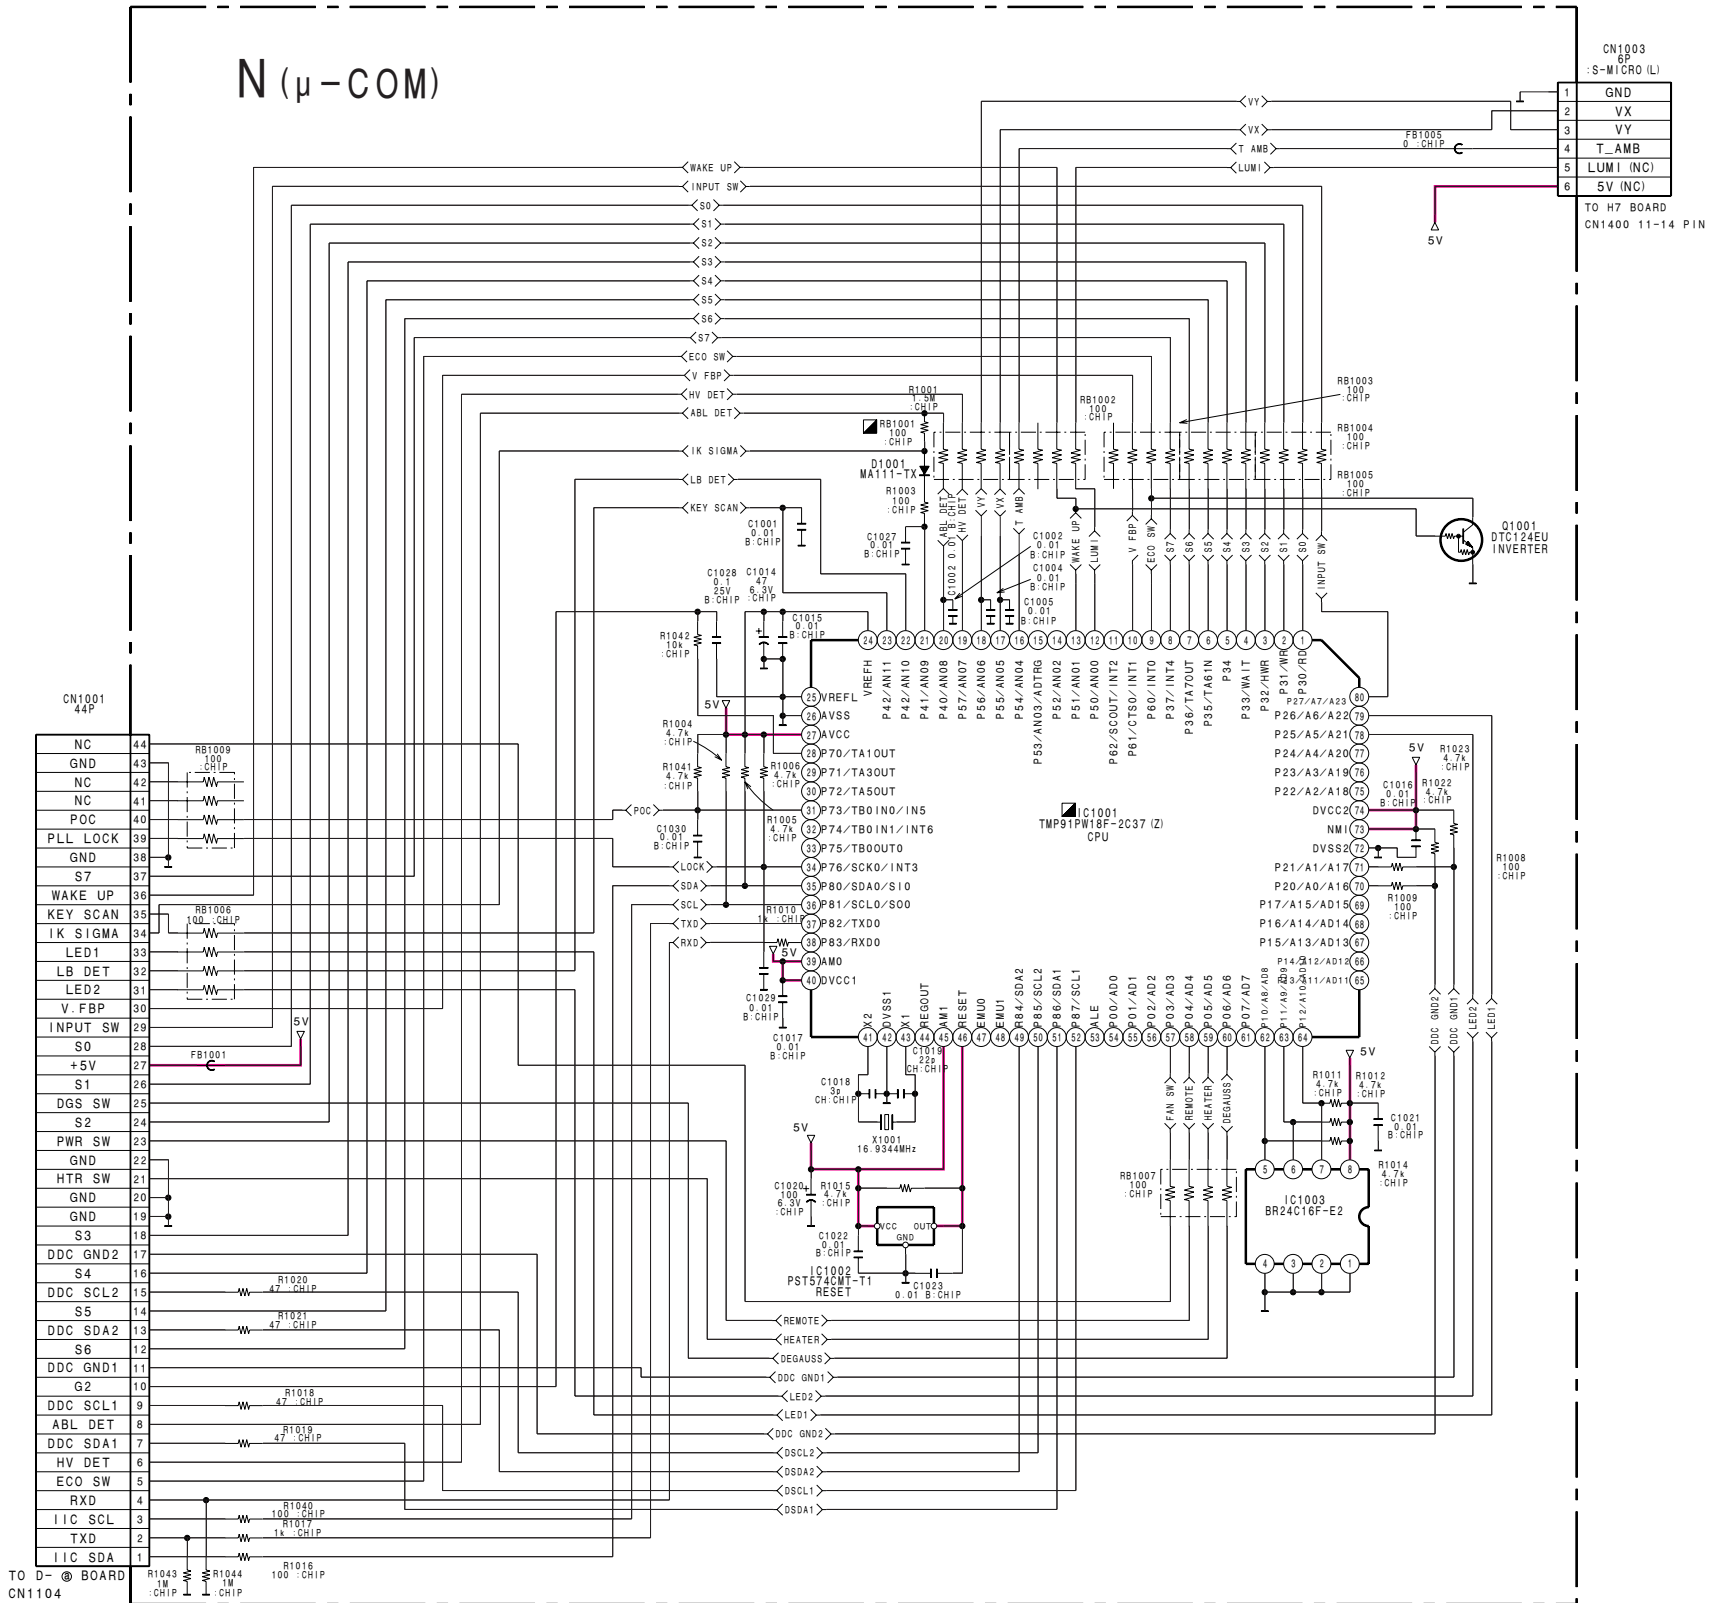


TO D- @ BOARD
CN1104

— N BOARD (Conductor Side) —

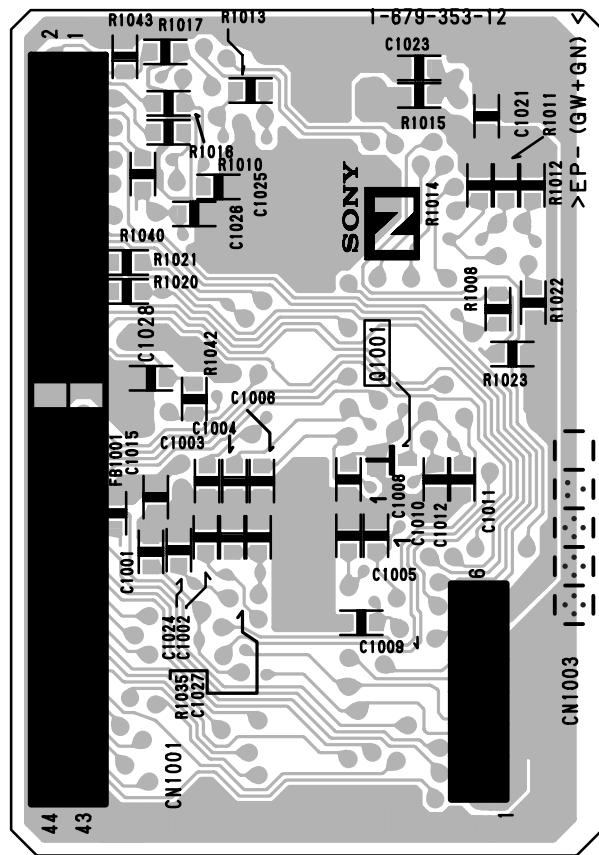

— N BOARD (Component Side) —

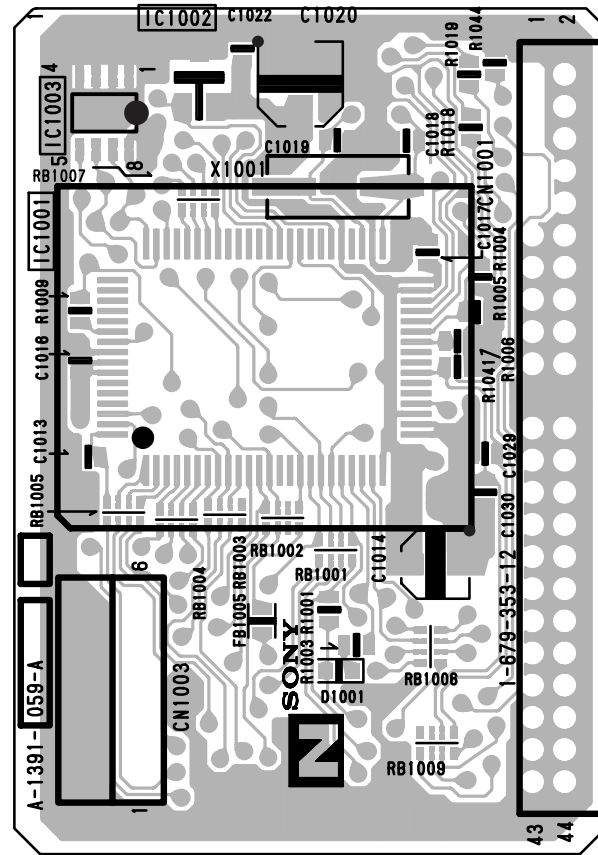

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
1		A1	CAPACITOR		C001	1-162-318-11	CERAMIC 0.001MF 10% 500V			
2		A1	CAPACITOR		C004	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
3		A1	CAPACITOR		C005	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
4		A1	CAPACITOR		C007	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
5		A1	CAPACITOR		C009	1-126-960-11	ELECT 1MF 20% 50V			
6		A1	CAPACITOR		C010	1-126-947-11	ELECT 47MF 20% 10V			
7		A1	CAPACITOR		C011	1-106-220-00	MYLAR 0.1MF 10% 100V			
8		A1	CAPACITOR		C012	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
9		A1	CAPACITOR		C014	1-107-930-91	ELECT 22MF 20% 100V			
10		A1	CAPACITOR		C015	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
11		A1	CAPACITOR		C016	1-128-528-11	ELECT 470MF 20% 16V			
12		A1	CAPACITOR		C017	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
13		A1	CAPACITOR		C018	1-107-649-11	ELECT 2.2MF 20% 250V			
14		A1	CAPACITOR		C019	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
15		A1	CAPACITOR		C021	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
16		A1	CAPACITOR		C022	1-126-947-11	ELECT 47MF 20% 10V			
17		A1	CAPACITOR		C023	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
18		A1	CAPACITOR		C024	1-107-909-11	ELECT 47MF 20% 16V			
19		A1	CAPACITOR		C025	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
20		A1	CAPACITOR		C026	1-163-227-11	CERAMIC CHIP 10pF 0.5pF 50V			
21		A1	CAPACITOR		C027	1-126-785-11	ELECT 47MF 20% 10V			
22		A1	CAPACITOR		C029	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
23		A1	CAPACITOR		C031	1-162-318-11	CERAMIC 0.001MF 10% 500V			
24		A1	CAPACITOR		C032	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
25		A1	CAPACITOR		C033	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
26		A1	CAPACITOR		C035	1-104-574-11	CERAMIC 0.0047MF 10% 2KV			
27		A1	CAPACITOR		C036	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
28		A1	CAPACITOR		C037	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
29		A1	CAPACITOR		C038	1-163-017-00	CERAMIC CHIP 0.0047MF 10% 50V			
30		A1	CAPACITOR		C039	1-115-339-11	CERAMIC CHIP 0.1MF 10% 50V			
31		A1	CAPACITOR		C040	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
32		A1	CAPACITOR		C042	1-115-339-11	CERAMIC CHIP 0.1MF 10% 50V			
33		A1	CAPACITOR		C043	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
34		A1	CAPACITOR		C045	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
35		A1	CAPACITOR		C046	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
36		A1	CAPACITOR		C048	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
37		A1	CAPACITOR		C049	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
38		A1	CAPACITOR		C050	1-115-339-11	CERAMIC CHIP 0.1MF 10% 50V			
39		A1	CAPACITOR		C051	1-115-339-11	CERAMIC CHIP 0.1MF 10% 50V			
40		A1	CAPACITOR		C053	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
41		A1	CAPACITOR		C054	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
42		A1	CAPACITOR		C055	1-163-235-11	CERAMIC CHIP 22pF 5% 50V			
43		A1	CAPACITOR		C057	1-126-947-11	ELECT 47MF 20% 25V			
44		A1	CAPACITOR		C058	1-163-224-11	CERAMIC CHIP 7pF 0.25pF 50V			
45		A1	CAPACITOR		C059	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
46		A1	CAPACITOR		C061	1-163-255-11	CERAMIC CHIP 150pF 5% 50V			
47		A1	CAPACITOR		C062	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
48		A1	CAPACITOR		C063	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
49		A1	CAPACITOR		C064	1-126-382-11	ELECT 100MF 20% 16V			
50		A1	CAPACITOR		C065	1-107-882-91	ELECT 100MF 20% 16V			
51		A1	CAPACITOR		C090	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
52		A1	CAPACITOR		C091	1-126-960-11	ELECT 1MF 20% 50V			
53		A1	CAPACITOR		C092	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
54		A1	CAPACITOR		C101	1-163-233-91	CERAMIC CHIP 18pF 5% 50V			
55		A1	CAPACITOR		C105	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
56		A1	CAPACITOR		C106	1-137-857-21	MYLAR 0.47MF 10% 250V			
57		A1	CAPACITOR		C108	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
58		A1	CAPACITOR		C109	1-126-947-11	ELECT 47MF 20% 25V			
59		A1	CAPACITOR		C111	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
60		A1	CAPACITOR		C120	1-126-947-11	ELECT 47MF 20% 25V			
61		A1	CAPACITOR		C123	1-136-189-00	MYLAR 0.1MF 10% 250V			
62		A1	CAPACITOR		C130	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
63		A1	CAPACITOR		C152	1-126-947-11	ELECT 47MF 20% 25V			
64		A1	CAPACITOR		C201	1-163-233-91	CERAMIC CHIP 18pF 5% 50V			
65		A1	CAPACITOR		C205	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
66		A1	CAPACITOR		C206	1-137-857-21	MYLAR 0.47MF 10% 250V			
67		A1	CAPACITOR		C208	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
68		A1	CAPACITOR		C211	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
69		A1	CAPACITOR		C220	1-126-947-11	ELECT 47MF 20% 25V			
70		A1	CAPACITOR		C223	1-136-189-00	MYLAR 0.1MF 10% 250V			
71		A1	CAPACITOR		C230	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
72		A1	CAPACITOR		C252	1-126-947-11	ELECT 47MF 20% 25V			
73		A1	CAPACITOR		C301	1-163-231-11	CERAMIC CHIP 15pF 5% 50V			
74		A1	CAPACITOR		C305	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
75		A1	CAPACITOR		C306	1-137-857-21	MYLAR 0.47MF 10% 250V			
76		A1	CAPACITOR		C308	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
77		A1	CAPACITOR		C311	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
78		A1	CAPACITOR		C319	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
79		A1	CAPACITOR		C320	1-126-947-11	ELECT 47MF 20% 25V			
80		A1	CAPACITOR		C323	1-136-189-00	MYLAR 0.1MF 10% 250V			
81		A1	CAPACITOR		C330	1-164-489-11	CERAMIC CHIP 0.22MF 10% 16V			
82		A1	CAPACITOR		C352	1-126-947-11	ELECT 47MF 20% 25V			
83		A1	CONNECTOR		CN303	1-695-915-11	TAB (CONTACT)			
84		A1	CONNECTOR		CN307	1-794-991-11	CONNECTOR, D SUB (INPUT1/HD15)			
85		A1	CONNECTOR		CN309	1-794-991-11	CONNECTOR, D SUB (INPUT2/HD15)			
86		A1	CONNECTOR	*	CN315	1-778-682-11	PIN, CONNECTOR (PC BOARD) 8P			
87		A1	CONNECTOR		CN318	1-764-101-11	PIN, CONNECTOR (PC BOARD) 2P			
88		A1	DIODE		D001	8-719-801-78	DIODE 1SS184			
89		A1	DIODE		D002	8-719-109-89	ZENER DIODE RD5.6ESB2			
90		A1	DIODE		D003	8-719-109-89	ZENER DIODE RD5.6ESB2			
91		A1	DIODE		D004	8-719-062-51	DIODE 1PS226-115			
92		A1	DIODE		D005	8-719-062-51	DIODE 1PS226-115			
93		A1	DIODE		D006	8-719-801-78	DIODE 1SS184			
94		A1	DIODE		D007	8-719-109-89	ZENER DIODE RD5.6ESB2			
95		A1	DIODE		D008	8-719-109-89	ZENER DIODE RD5.6ESB2			
96		A1	DIODE		D009	8-719-109-89	ZENER DIODE RD5.6ESB2			
97		A1	DIODE		D010	8-719-109-89	ZENER DIODE RD5.6ESB2			
98		A1	DIODE		D011	8-719-109-89	ZENER DIODE RD5.6ESB2			
99		A1	DIODE		D012	8-719-062-51	DIODE 1PS226-115			
100		A1	DIODE		D013	8-719-911-19	DIODE 1SS119-25			
101		A1	DIODE		D014	8-719-911-19	DIODE 1SS119-25			
102		A1	DIODE		D016	8-719-109-89	ZENER DIODE RD5.6ESB2			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
103		A1	DIODE		D019	8-719-062-51	DIODE 1PS226-115			
104		A1	DIODE		D101	8-719-062-51	DIODE 1PS226-115			
105		A1	DIODE		D104	8-719-052-12	DIODE 1SS376TE-17			
106		A1	DIODE		D105	8-719-052-12	DIODE 1SS376TE-17			
107		A1	DIODE		D106	8-719-970-83	DIODE HSS82-TJ			
108		A1	DIODE		D108	8-719-066-10	DIODE 1PS181-115			
109		A1	DIODE		D111	8-719-062-51	DIODE 1PS226-115			
110		A1	DIODE		D201	8-719-062-51	DIODE 1PS226-115			
111		A1	DIODE		D204	8-719-052-12	DIODE 1SS376TE-17			
112		A1	DIODE		D205	8-719-052-12	DIODE 1SS376TE-17			
113		A1	DIODE		D206	8-719-970-83	DIODE HSS82-TJ			
114		A1	DIODE		D208	8-719-066-10	DIODE 1PS181-115			
115		A1	DIODE		D211	8-719-062-51	DIODE 1PS226-115			
116		A1	DIODE		D301	8-719-062-51	DIODE 1PS226-115			
117		A1	DIODE		D304	8-719-052-12	DIODE 1SS376TE-17			
118		A1	DIODE		D305	8-719-052-12	DIODE 1SS376TE-17			
119		A1	DIODE		D306	8-719-970-83	DIODE HSS82-TJ			
120		A1	DIODE		D308	8-719-066-10	DIODE 1PS181-115			
121		A1	DIODE		D311	8-719-062-51	DIODE 1PS226-115			
122		A1	CHIP CONDUCTOR		FB002	1-216-295-91	SHORT 0			
123		A1	FERRITE BEAD		FB003	1-412-911-31	FERRITE 1.1uH			
124		A1	FERRITE BEAD		FB004	1-412-911-31	FERRITE 1.1uH			
125		A1	FERRITE BEAD		FB005	1-412-911-31	FERRITE 1.1uH			
126		A1	CHIP CONDUCTOR		FB006	1-216-295-91	SHORT 0			
127		A1	CHIP CONDUCTOR		FB007	1-216-295-91	SHORT 0			
128		A1	CHIP CONDUCTOR		FB008	1-216-295-91	SHORT 0			
129		A1	FERRITE BEAD		FB009	1-414-231-22	FERRITE 0uH			
130		A1	COIL		FB102	1-469-965-21	INDUCTOR 0uH			
131		A1	COIL		FB103	1-469-965-21	INDUCTOR 0uH			
132		A1	FERRITE BEAD		FB104	1-412-911-31	FERRITE 1.1uH			
133		A1	FERRITE BEAD		FB110	1-412-911-31	FERRITE 1.1uH			
134		A1	COIL		FB202	1-469-965-21	INDUCTOR 0uH			
135		A1	COIL		FB203	1-469-965-21	INDUCTOR 0uH			
136		A1	FERRITE BEAD		FB210	1-412-911-31	FERRITE 1.1uH			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
137		A1	COIL		FB302	1-469-965-21	INDUCTOR 0uH			
138		A1	COIL		FB303	1-469-965-21	INDUCTOR 0uH			
139		A1	FERRITE BEAD		FB310	1-412-911-31	FERRITE 1.1uH			
140		A1	IC		IC001	6-700-496-01	IC M61314SP			
141		A1	IC		IC002	8-759-824-97	IC LM2412T			
142		A1	IC		IC003	8-759-681-38	IC CXD9548MTR			
143		A1	IC		IC004	8-749-019-91	IC H8D3104			
144		A1	IC		IC005	8-759-058-60	IC TC7SU04FU(TE85R)			
145		A1	IC		IC006	8-759-584-98	IC SN74AHCT04NSR			
146		A1	IC		IC007	8-759-640-39	IC BR24C02F-WE2			
147		A1	IC		IC008	8-759-680-71	IC MM1470AD			
148		A1	IC		IC009	8-759-640-39	IC BR24C02F-WE2			
149		A1	IC		IC011	8-759-592-79	IC BA00AST-V5			
150		A1	SOCKET	!	J001	1-451-524-11	SOCKET, PICTURE TUBE			
151		A1	CHIP CONDUCTOR		JR001	1-216-296-11	SHORT 0			
152		A1	CHIP CONDUCTOR		JR002	1-216-296-11	SHORT 0			
153		A1	CHIP CONDUCTOR		JR005	1-216-296-11	SHORT 0			
154		A1	CHIP CONDUCTOR		JR007	1-216-295-91	SHORT 0			
155		A1	CHIP CONDUCTOR		JR008	1-216-296-11	SHORT 0			
156		A1	CHIP CONDUCTOR		JR009	1-216-296-11	SHORT 0			
157		A1	CHIP CONDUCTOR		JR010	1-216-296-11	SHORT 0			
158		A1	CHIP CONDUCTOR		JR011	1-216-296-11	SHORT 0			
159		A1	CHIP CONDUCTOR		JR012	1-216-296-11	SHORT 0			
160		A1	CHIP CONDUCTOR		JR013	1-216-296-11	SHORT 0			
161		A1	CHIP CONDUCTOR		JR014	1-216-296-11	SHORT 0			
162		A1	CHIP CONDUCTOR		JR015	1-216-295-91	SHORT 0			
163		A1	CHIP CONDUCTOR		JR016	1-216-296-11	SHORT 0			
164		A1	CHIP CONDUCTOR		JR017	1-216-296-11	SHORT 0			
165		A1	CHIP CONDUCTOR		JR019	1-216-296-11	SHORT 0			
166		A1	CHIP CONDUCTOR		JR020	1-216-296-11	SHORT 0			
167		A1	CHIP CONDUCTOR		JR021	1-216-296-11	SHORT 0			
168		A1	CHIP CONDUCTOR		JR022	1-216-295-91	SHORT 0			
169		A1	CHIP CONDUCTOR		JR023	1-216-295-91	SHORT 0			
170		A1	CHIP CONDUCTOR		JR024	1-216-296-11	SHORT 0			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
171		A1	CHIP CONDUCTOR		JR025	1-216-296-11	SHORT 0			
172		A1	CHIP CONDUCTOR		JR026	1-216-295-91	SHORT 0			
173		A1	CHIP CONDUCTOR		JR027	1-216-296-11	SHORT 0			
174		A1	CHIP CONDUCTOR		JR028	1-216-296-11	SHORT 0			
175		A1	CHIP CONDUCTOR		JR029	1-216-295-91	SHORT 0			
176		A1	CHIP CONDUCTOR		JR030	1-216-296-11	SHORT 0			
177		A1	COIL		L001	1-412-537-31	INDUCTOR 100uH			
178		A1	COIL		L002	1-412-549-31	INDUCTOR 1MH			
179		A1	COIL		L003	1-412-537-31	INDUCTOR 100uH			
180		A1	COIL		L004	1-412-529-11	INDUCTOR 22uH			
181		A1	COIL		L005	1-412-537-31	INDUCTOR 100uH			
182		A1	COIL		L006	1-412-537-31	INDUCTOR 100uH			
183		A1	COIL		L007	1-412-537-31	INDUCTOR 100uH			
184		A1	TRANSISTOR		Q001	8-729-025-28	TRANSISTOR 2SK1828			
185		A1	TRANSISTOR		Q002	8-729-025-28	TRANSISTOR 2SK1828			
186		A1	TRANSISTOR		Q004	8-729-025-28	TRANSISTOR 2SK1828			
187		A1	TRANSISTOR		Q005	8-729-025-28	TRANSISTOR 2SK1828			
188		A1	TRANSISTOR		Q101	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
189		A1	TRANSISTOR		Q201	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
190		A1	TRANSISTOR		Q301	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
191		A1	RESISTOR		R001	1-216-077-91	RES-CHIP 15K 5% 1/10W			
192		A1	RESISTOR		R002	1-216-077-91	RES-CHIP 15K 5% 1/10W			
193		A1	RESISTOR		R003	1-216-025-11	RES-CHIP 100 5% 1/10W			
194		A1	RESISTOR		R006	1-260-316-51	CARBON 100 5% 1/2W			
195		A1	RESISTOR		R007	1-216-025-11	RES-CHIP 100 5% 1/10W			
196		A1	RESISTOR		R008	1-216-025-11	RES-CHIP 100 5% 1/10W			
197		A1	RESISTOR		R010	1-216-025-11	RES-CHIP 100 5% 1/10W			
198		A1	RESISTOR		R011	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
199		A1	RESISTOR		R012	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
200		A1	RESISTOR		R013	1-216-025-11	RES-CHIP 100 5% 1/10W			
201		A1	RESISTOR		R014	1-260-316-51	CARBON 100 5% 1/2W			
202		A1	RESISTOR		R015	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
203		A1	RESISTOR		R016	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
204		A1	RESISTOR		R017	1-216-025-11	RES-CHIP 100 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
205		A1	RESISTOR		R018	1-216-025-11	RES-CHIP 100 5% 1/10W			
206		A1	RESISTOR		R019	1-216-071-00	RES-CHIP 8.2K 5% 1/10W			
207		A1	RESISTOR		R020	1-216-025-11	RES-CHIP 100 5% 1/10W			
208		A1	RESISTOR		R021	1-216-025-11	RES-CHIP 100 5% 1/10W			
209		A1	CHIP CONDUCTOR		R022	1-216-295-91	SHORT 0			
210		A1	RESISTOR		R023	1-216-049-11	RES-CHIP 1K 5% 1/10W			
211		A1	RESISTOR		R024	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
212		A1	RESISTOR		R025	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
213		A1	RESISTOR		R027	1-216-017-91	RES-CHIP 47 5% 1/10W			
214		A1	RESISTOR		R028	1-216-017-91	RES-CHIP 47 5% 1/10W			
215		A1	CHIP CONDUCTOR		R030	1-216-295-91	SHORT 0			
216		A1	RESISTOR		R031	1-216-077-91	RES-CHIP 15K 5% 1/10W			
217		A1	RESISTOR		R032	1-260-316-51	CARBON 100 5% 1/2W			
218		A1	RESISTOR		R033	1-216-651-11	METAL CHIP 1K 0.5% 1/10W			
219		A1	RESISTOR		R034	1-216-055-00	RES-CHIP 1.8K 5% 1/10W			
220		A1	RESISTOR		R038	1-216-017-91	RES-CHIP 47 5% 1/10W			
221		A1	RESISTOR		R039	1-216-017-91	RES-CHIP 47 5% 1/10W			
222		A1	RESISTOR		R040	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
223		A1	RESISTOR		R041	1-216-073-91	RES-CHIP 10K 5% 1/10W			
224		A1	CHIP CONDUCTOR		R043	1-216-295-91	SHORT 0			
225		A1	CHIP CONDUCTOR		R044	1-216-295-91	SHORT 0			
226		A1	CHIP CONDUCTOR		R046	1-216-295-91	SHORT 0			
227		A1	CHIP CONDUCTOR		R047	1-216-295-91	SHORT 0			
228		A1	RESISTOR		R048	1-216-089-91	RES-CHIP 47K 5% 1/10W			
229		A1	RESISTOR		R049	1-216-089-91	RES-CHIP 47K 5% 1/10W			
230		A1	RESISTOR		R051	1-216-121-11	RES-CHIP 1M 5% 1/10W			
231		A1	RESISTOR		R052	1-259-884-11	CARBON 4.7M 5% 1/4W			
232		A1	RESISTOR		R053	1-216-627-11	METAL CHIP 100 0.5% 1/10W			
233		A1	RESISTOR		R054	1-260-103-11	CARBON 2.2K 5% 1/2W			
234		A1	RESISTOR		R058	1-216-049-11	RES-CHIP 1K 5% 1/10W			
235		A1	RESISTOR		R059	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
236		A1	RESISTOR		R064	1-260-127-11	CARBON 220K 5% 1/2W			
237		A1	RESISTOR		R077	1-216-077-91	RES-CHIP 15K 5% 1/10W			
238		A1	RESISTOR		R078	1-216-668-11	METAL CHIP 5.1K 0.5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
239		A1	RESISTOR		R079	1-216-663-11	METAL CHIP 3.3K 0.5% 1/10W			
240		A1	RESISTOR		R080	1-216-661-11	METAL CHIP 2.7K 0.5% 1/10W			
241		A1	RESISTOR		R082	1-216-369-00	METAL OXIDE 1 5% 2W			
242		A1	RESISTOR		R092	1-216-077-91	RES-CHIP 15K 5% 1/10W			
243		A1	CHIP CONDUCTOR		R097	1-216-295-91	SHORT 0			
244		A1	RESISTOR		R098	1-216-089-91	RES-CHIP 47K 5% 1/10W			
245		A1	RESISTOR		R101	1-215-395-00	METAL 82 1% 1/4W			
246		A1	RESISTOR		R104	1-216-059-00	RES-CHIP 2.7K 5% 1/10W			
247		A1	RESISTOR		R106	1-249-436-11	CARBON 39K 5% 1/4W			
248		A1	RESISTOR		R107	1-216-085-91	RES-CHIP 33K 5% 1/10W			
249		A1	RESISTOR		R108	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
250		A1	RESISTOR		R109	1-216-121-11	RES-CHIP 1M 5% 1/10W			
251		A1	RESISTOR		R110	1-216-037-00	RES-CHIP 330 5% 1/10W			
252		A1	RESISTOR		R111	1-249-402-11	CARBON 56 5% 1/4W			
253		A1	RESISTOR		R115	1-216-081-00	RES-CHIP 22K 5% 1/10W			
254		A1	RESISTOR		R117	1-216-013-00	RES-CHIP 33 5% 1/10W			
255		A1	RESISTOR		R118	1-216-009-91	RES-CHIP 22 5% 1/10W			
256		A1	RESISTOR		R119	1-216-113-00	RES-CHIP 470K 5% 1/10W			
257		A1	RESISTOR		R120	1-216-113-00	RES-CHIP 470K 5% 1/10W			
258		A1	RESISTOR		R121	1-216-113-00	RES-CHIP 470K 5% 1/10W			
259		A1	RESISTOR		R122	1-216-121-11	RES-CHIP 1M 5% 1/10W			
260		A1	RESISTOR		R123	1-249-416-11	CARBON 820 5% 1/4W			
261		A1	RESISTOR		R130	1-249-399-11	CARBON 33 5% 1/4W			
262		A1	COIL		R133	1-469-965-21	INDUCTOR 0uH			
263		A1	RESISTOR		R140	1-249-399-11	CARBON 33 5% 1/4W			
264		A1	RESISTOR		R151	1-219-742-11	CARBON 47 5% 1/2W			
265		A1	RESISTOR		R161	1-215-395-00	METAL 82 1% 1/4W			
266		A1	RESISTOR		R163	1-216-025-11	RES-CHIP 100 5% 1/10W			
267		A1	RESISTOR		R164	1-216-099-00	RES-CHIP 120K 5% 1/10W			
268		A1	RESISTOR		R201	1-215-395-00	METAL 82 1% 1/4W			
269		A1	RESISTOR		R204	1-216-059-00	RES-CHIP 2.7K 5% 1/10W			
270		A1	RESISTOR		R206	1-249-436-11	CARBON 39K 5% 1/4W			
271		A1	RESISTOR		R207	1-216-085-91	RES-CHIP 33K 5% 1/10W			
272		A1	RESISTOR		R208	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
273		A1	RESISTOR		R209	1-216-121-11	RES-CHIP 1M 5% 1/10W			
274		A1	RESISTOR		R210	1-216-045-00	RES-CHIP 680 5% 1/10W			
275		A1	RESISTOR		R211	1-249-403-11	CARBON 68 5% 1/4W			
276		A1	RESISTOR		R215	1-216-081-00	RES-CHIP 22K 5% 1/10W			
277		A1	RESISTOR		R217	1-216-013-00	RES-CHIP 33 5% 1/10W			
278		A1	RESISTOR		R218	1-216-017-91	RES-CHIP 47 5% 1/10W			
279		A1	RESISTOR		R219	1-216-113-00	RES-CHIP 470K 5% 1/10W			
280		A1	RESISTOR		R220	1-216-113-00	RES-CHIP 470K 5% 1/10W			
281		A1	RESISTOR		R221	1-216-113-00	RES-CHIP 470K 5% 1/10W			
282		A1	RESISTOR		R222	1-216-121-11	RES-CHIP 1M 5% 1/10W			
283		A1	RESISTOR		R223	1-249-416-11	CARBON 820 5% 1/4W			
284		A1	RESISTOR		R230	1-249-399-11	CARBON 33 5% 1/4W			
285		A1	COIL		R233	1-469-965-21	INDUCTOR 0uH			
286		A1	RESISTOR		R240	1-249-399-11	CARBON 33 5% 1/4W			
287		A1	RESISTOR		R251	1-219-742-11	CARBON 47 5% 1/2W			
288		A1	RESISTOR		R261	1-215-395-00	METAL 82 1% 1/4W			
289		A1	RESISTOR		R263	1-216-025-11	RES-CHIP 100 5% 1/10W			
290		A1	RESISTOR		R264	1-216-099-00	RES-CHIP 120K 5% 1/10W			
291		A1	RESISTOR		R301	1-215-395-00	METAL 82 1% 1/4W			
292		A1	RESISTOR		R304	1-216-059-00	RES-CHIP 2.7K 5% 1/10W			
293		A1	RESISTOR		R306	1-249-436-11	CARBON 39K 5% 1/4W			
294		A1	RESISTOR		R307	1-216-085-91	RES-CHIP 33K 5% 1/10W			
295		A1	RESISTOR		R308	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
296		A1	RESISTOR		R309	1-216-121-11	RES-CHIP 1M 5% 1/10W			
297		A1	RESISTOR		R310	1-216-037-00	RES-CHIP 330 5% 1/10W			
298		A1	RESISTOR		R311	1-249-402-11	CARBON 56 5% 1/4W			
299		A1	RESISTOR		R315	1-216-081-00	RES-CHIP 22K 5% 1/10W			
300		A1	RESISTOR		R317	1-216-013-00	RES-CHIP 33 5% 1/10W			
301		A1	RESISTOR		R318	1-216-019-00	RES-CHIP 56 5% 1/10W			
302		A1	RESISTOR		R319	1-216-113-00	RES-CHIP 470K 5% 1/10W			
303		A1	RESISTOR		R320	1-216-113-00	RES-CHIP 470K 5% 1/10W			
304		A1	RESISTOR		R321	1-216-113-00	RES-CHIP 470K 5% 1/10W			
305		A1	RESISTOR		R322	1-216-121-11	RES-CHIP 1M 5% 1/10W			
306		A1	RESISTOR		R323	1-249-416-11	CARBON 820 5% 1/4W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
307		A1	RESISTOR		R330	1-249-399-11	CARBON 33 5% 1/4W			
308		A1	COIL		R333	1-469-965-21	INDUCTOR 0uH			
309		A1	RESISTOR		R340	1-249-399-11	CARBON 33 5% 1/4W			
310		A1	RESISTOR		R351	1-219-742-11	CARBON 47 5% 1/2W			
311		A1	RESISTOR		R361	1-215-395-00	METAL 82 1% 1/4W			
312		A1	RESISTOR		R363	1-216-025-11	RES-CHIP 100 5% 1/10W			
313		A1	RESISTOR		R364	1-216-099-00	RES-CHIP 120K 5% 1/10W			
314		A1	SPARK GAP		SG001	1-519-422-11	GAP, SPARK			
315		A1	SPARK GAP		SG002	1-576-354-21	GAP, SPARK			
316		A1	SPARK GAP		SG101	1-576-354-21	GAP, SPARK			
317		A1	SPARK GAP		SG201	1-576-354-21	GAP, SPARK			
318		A1	SPARK GAP		SG301	1-576-354-21	GAP, SPARK			
319		A1	CRYSTAL		X001	1-760-682-21	VIBRATOR, CRYSTAL (24.5MHz)			
320		D	CAPACITOR		C401	1-128-528-11	ELECT 470MF 20% 25V			
321		D	CAPACITOR		C402	1-130-785-11	MYLAR 0.47MF 10% 100V			
322		D	CAPACITOR		C403	1-107-911-11	ELECT 220MF 20% 50V			
323		D	CAPACITOR		C404	1-128-528-11	ELECT 470MF 20% 25V			
324		D	CAPACITOR		C405	1-163-009-91	CERAMIC CHIP 0.001MF 10% 50V			
325		D	CAPACITOR		C406	1-137-366-11	MYLAR 0.0022MF 5% 50V			
326		D	CAPACITOR		C407	1-164-161-11	CERAMIC CHIP 0.0022MF 10% 50V			
327		D	CAPACITOR		C408	1-163-222-11	CERAMIC CHIP 5pF 0.25pF 50V			
328		D	CAPACITOR		C500	1-163-259-91	CERAMIC CHIP 220pF 5% 50V			
329		D	CAPACITOR		C502	1-137-150-11	MYLAR 0.01MF 5% 50V			
330		D	CAPACITOR		C503	1-130-495-00	MYLAR 0.1MF 5% 50V			
331		D	CAPACITOR		C504	1-137-368-11	MYLAR 0.0047MF 5% 50V			
332		D	CAPACITOR		C505	1-126-949-11	ELECT 220MF 20% 35V			
333		D	CAPACITOR		C506	1-127-810-51	ELECT MELF 22MF 20% 250V			
334		D	CAPACITOR		C507	1-136-207-11	MYLAR 0.047MF 5% 400V			
335		D	CAPACITOR		C508	1-137-715-11	FILM 3300pF 3% 1.8KV			
336		D	CAPACITOR		C509	1-107-444-11	CERAMIC 100pF 5% 2KV			
337		D	CAPACITOR		C510	1-136-684-51	MYLAR 0.0022MF 10% 100V			
338		D	CAPACITOR		C511	1-163-038-91	CERAMIC CHIP 0.1MF 25V			
339		D	CAPACITOR		C512	1-163-005-91	CERAMIC CHIP 470pF 10% 50V			
340		D	CAPACITOR		C513	1-163-038-91	CERAMIC CHIP 0.1MF 25V			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
341		D	CAPACITOR		C514	1-137-368-11	MYLAR 0.0047MF 5% 50V			
342		D	CAPACITOR		C515	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
343		D	CAPACITOR		C516	1-126-934-11	ELECT 220MF 20% 16V			
344		D	CAPACITOR		C517	1-163-133-00	CERAMIC CHIP 470pF 5% 50V			
345		D	CAPACITOR		C519	1-163-017-00	CERAMIC CHIP 0.0047MF 10% 50V			
346		D	CAPACITOR		C520	1-163-023-00	CERAMIC CHIP 0.015MF 10% 50V			
347		D	CAPACITOR		C521	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
348		D	CAPACITOR		C522	1-126-965-91	ELECT 22MF 20% 50V			
349		D	CAPACITOR		C524	1-126-941-11	ELECT 470MF 20% 25V			
350		D	CAPACITOR		C525	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
351		D	CAPACITOR		C533	1-163-017-00	CERAMIC CHIP 0.0047MF 10% 50V			
352		D	CAPACITOR		C534	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
353		D	CAPACITOR		C535	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
354		D	CAPACITOR		C536	1-107-665-11	ELECT 0.47MF 20% 400V			
355		D	CAPACITOR		C537	1-137-868-11	FILM 0.13MF 5% 400V			
356		D	CAPACITOR		C538	1-107-651-11	ELECT 4.7MF 20% 250V			
357		D	CAPACITOR		C539	1-115-356-11	FILM 1.2MF 5% 250V			
358		D	CAPACITOR		C540	1-107-888-11	ELECT 47MF 20% 25V			
359		D	CAPACITOR		C541	1-115-521-11	FILM 0.82MF 5% 250V			
360		D	CAPACITOR		C542	1-164-346-11	CERAMIC CHIP 1MF 16V			
361		D	CAPACITOR		C543	1-117-666-11	FILM 0.39MF 5% 250V			
362		D	CAPACITOR		C544	1-164-005-11	CERAMIC CHIP 0.47MF 16V			
363		D	CAPACITOR		C545	1-117-662-11	FILM 0.18MF 5% 250V			
364		D	CAPACITOR		C546	1-164-222-91	CERAMIC CHIP 0.22MF 25V			
365		D	CAPACITOR		C547	1-119-860-11	FILM 0.082MF 5% 250V			
366		D	CAPACITOR		C548	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
367		D	CAPACITOR		C549	1-136-060-00	FILM 0.047MF 5% 400V			
368		D	CAPACITOR		C550	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
369		D	CAPACITOR		C554	1-163-009-91	CERAMIC CHIP 0.001MF 10% 50V			
370		D	CAPACITOR		C559	1-163-038-91	CERAMIC CHIP 0.1MF 25V			
371		D	CAPACITOR		C560	1-137-856-11	FILM 0.018MF 5% 400V			
372		D	CAPACITOR		C561	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
373		D	CAPACITOR		C562	1-163-009-91	CERAMIC CHIP 0.001MF 10% 50V			
374		D	CAPACITOR		C563	1-104-572-11	CERAMIC 0.0022MF 10% 2KV			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
375		D	CAPACITOR		C564	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
376		D	CAPACITOR		C565	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
377		D	CAPACITOR		C566	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
378		D	CAPACITOR	!	C601	1-107-533-11	MYLAR 1MF 20% 250V			
379		D	CAPACITOR	!	C602	1-104-708-11	MYLAR 0.47MF 20% 250V			
380		D	CAPACITOR	!	C603	1-113-900-11	CERAMIC 470pF 10% 250V			
381		D	CAPACITOR	!	C604	1-113-900-11	CERAMIC 470pF 10% 250V			
382		D	CAPACITOR	!	C605	1-113-926-11	CERAMIC 0.0047MF 250V			
383		D	CAPACITOR	!	C606	1-113-926-11	CERAMIC 0.0047MF 250V			
384		D	CAPACITOR		C607	1-113-920-11	CERAMIC 2200pF 20% 125V			
385		D	CAPACITOR		C610	1-137-673-11	ELECT 330MF 20% 450V			
386		D	CAPACITOR		C611	1-117-227-11	MYLAR 1MF 10% 450V			
387		D	CAPACITOR		C612	1-136-169-00	FILM 0.22MF 5% 50V			
388		D	CAPACITOR		C613	1-126-967-11	ELECT 47MF 20% 50V			
389		D	CAPACITOR		C614	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
390		D	CAPACITOR		C615	1-104-564-91	CERAMIC 100pF 10% 2KV			
391		D	CAPACITOR		C629	1-163-017-00	CERAMIC CHIP 0.0047MF 10% 50V			
392		D	CAPACITOR		C630	1-163-038-91	CERAMIC CHIP 0.1MF 25V			
393		D	CAPACITOR		C631	1-104-665-11	ELECT 100MF 20% 25V			
394		D	CAPACITOR		C632	1-126-961-11	ELECT 2.2MF 20% 50V			
395		D	CAPACITOR		C635	1-163-005-91	CERAMIC CHIP 470pF 10% 50V			
396		D	CAPACITOR		C636	1-164-161-11	CERAMIC CHIP 0.0022MF 10% 50V			
397		D	CAPACITOR		C640	1-126-795-11	ELECT 10MF 20% 50V			
398		D	CAPACITOR		C641	1-107-792-11	CERAMIC 100pF 5% 1KV			
399		D	CAPACITOR		C642	1-136-189-00	MYLAR 0.1MF 10% 250V			
400		D	CAPACITOR		C643	1-107-792-11	CERAMIC 100pF 5% 1KV			
401		D	CAPACITOR		C644	1-136-165-00	FILM 0.1MF 5% 50V			
402		D	CAPACITOR		C645	1-136-479-11	FILM 0.001MF 2% 50V			
403		D	CAPACITOR		C646	1-126-961-11	ELECT 2.2MF 20% 50V			
404		D	CAPACITOR		C647	1-126-963-11	ELECT 4.7MF 20% 50V			
405		D	CAPACITOR		C648	1-126-967-11	ELECT 47MF 20% 50V			
406		D	CAPACITOR		C649	1-163-009-91	CERAMIC CHIP 0.001MF 10% 50V			
407		D	CAPACITOR		C650	1-107-965-11	ELECT 100MF 20% 250V			
408		D	CAPACITOR		C652	1-128-563-11	ELECT 100MF 20% 100V			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
409		D	CAPACITOR		C654	1-126-943-11	ELECT 2200MF 20% 25V			
410		D	CAPACITOR		C655	1-126-947-11	ELECT 47MF 20% 25V			
411		D	CAPACITOR		C656	1-126-943-11	ELECT 2200MF 20% 25V			
412		D	CAPACITOR		C657	1-126-947-11	ELECT 47MF 20% 25V			
413		D	CAPACITOR		C658	1-137-725-21	FILM 8200pF 3% 800V			
414		D	CAPACITOR		C667	1-107-909-11	ELECT 47MF 20% 16V			
415		D	CAPACITOR		C680	1-107-886-11	ELECT 4700MF 20% 16V			
416		D	CAPACITOR		C681	1-107-889-11	ELECT 220MF 20% 10V			
417		D	CAPACITOR		C682	1-137-368-11	MYLAR 0.0047MF 5% 50V			
418		D	CAPACITOR		C683	1-115-706-11	ELECT 220MF 20% 6.3V			
419		D	CAPACITOR		C686	1-115-706-11	ELECT 220MF 20% 6.3V			
420		D	CAPACITOR		C687	1-130-495-00	MYLAR 0.1MF 5% 50V			
421		D	CAPACITOR		C692	1-115-706-11	ELECT 220MF 20% 6.3V			
422		D	CAPACITOR		C693	1-117-699-11	CERAMIC 0.001MF 99% 250V			
423		D	CAPACITOR		C701	1-163-003-11	CERAMIC CHIP 330pF 10% 50V			
424		D	CAPACITOR		C703	1-163-003-11	CERAMIC CHIP 330pF 10% 50V			
425		D	CAPACITOR		C704	1-137-150-11	MYLAR 0.01MF 5% 50V			
426		D	CAPACITOR		C705	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
427		D	CAPACITOR		C706	1-137-150-11	MYLAR 0.01MF 5% 50V			
428		D	CAPACITOR		C707	1-104-666-11	ELECT 220MF 20% 25V			
429		D	CAPACITOR		C708	1-104-666-11	ELECT 220MF 20% 25V			
430		D	CAPACITOR		C711	1-163-239-11	CERAMIC CHIP 33pF 5% 50V			
431		D	CAPACITOR		C712	1-163-239-11	CERAMIC CHIP 33pF 5% 50V			
432		D	CAPACITOR		C713	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
433		D	CAPACITOR		C714	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
434		D	CAPACITOR		C718	1-163-038-91	CERAMIC CHIP 0.1MF 25V			
435		D	CAPACITOR		C719	1-163-038-91	CERAMIC CHIP 0.1MF 25V			
436		D	CAPACITOR		C720	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
437		D	CAPACITOR		C721	1-128-562-11	ELECT 47MF 20% 100V			
438		D	CAPACITOR		C723	1-128-560-11	ELECT 22MF 20% 100V			
439		D	CAPACITOR		C724	1-162-134-11	CERAMIC 470pF 10% 2KV			
440		D	CAPACITOR		C726	1-163-038-91	CERAMIC CHIP 0.1MF 25V			
441		D	CAPACITOR		C727	1-163-038-91	CERAMIC CHIP 0.1MF 25V			
442		D	CAPACITOR		C730	1-163-009-91	CERAMIC CHIP 0.001MF 10% 50V			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
443		D	CAPACITOR		C732	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
444		D	CAPACITOR		C733	1-117-722-11	ELECT 2200MF 20% 10V			
445		D	CAPACITOR		C734	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
446		D	CAPACITOR		C736	1-126-967-11	ELECT 47MF 20% 50V			
447		D	CAPACITOR		C737	1-126-967-11	ELECT 47MF 20% 50V			
448		D	CAPACITOR		C738	1-136-169-00	FILM 0.22MF 5% 50V			
449		D	CAPACITOR		C761	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
450		D	CAPACITOR		C900	1-107-713-11	ELECT 4.7MF 20% 50V			
451		D	CAPACITOR		C901	1-104-665-11	ELECT 100MF 20% 25V			
452		D	CAPACITOR		C902	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
453		D	CAPACITOR		C903	1-126-962-11	ELECT 3.3MF 20% 50V			
454		D	CAPACITOR		C904	1-115-339-11	CERAMIC CHIP 0.1MF 10% 50V			
455		D	CAPACITOR		C905	1-163-133-00	CERAMIC CHIP 470pF 5% 50V			
456		D	CAPACITOR		C906	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
457		D	CAPACITOR		C908	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
458		D	CAPACITOR		C909	1-104-665-11	ELECT 100MF 20% 25V			
459		D	CAPACITOR		C910	1-163-259-91	CERAMIC CHIP 220pF 5% 50V			
460		D	CAPACITOR		C911	1-163-137-00	CERAMIC CHIP 680pF 5% 50V			
461		D	CAPACITOR		C913	1-135-842-51	ELECT 47MF 20% 250V			
462		D	CAPACITOR		C914	1-136-203-91	CAP, METALIZED FILM 0.01MF			
463		D	CAPACITOR		C915	1-137-867-11	FILM 0.00047MF 5% 250V			
464		D	CAPACITOR		C916	1-117-665-11	FILM 0.33MF 5% 250V			
465		D	CAPACITOR		C917	1-115-339-11	CERAMIC CHIP 0.1MF 10% 50V			
466		D	CAPACITOR		C918	1-117-626-31	FILM 2000pF 3% 1.2KV			
467		D	CAPACITOR		C919	1-115-349-51	CERAMIC 0.01MF 2KV			
468		D	CAPACITOR		C920	1-115-349-51	CERAMIC 0.01MF 2KV			
469		D	CAPACITOR		C921	1-163-038-91	CERAMIC CHIP 0.1MF 25V			
470		D	CAPACITOR		C923	1-126-959-11	ELECT 0.47MF 20% 50V			
471		D	CAPACITOR		C925	1-137-372-11	MYLAR 0.022MF 5% 50V			
472		D	CAPACITOR		C926	1-106-220-00	MYLAR 0.1MF 10% 100V			
473		D	CAPACITOR		C927	1-102-228-00	CERAMIC 470pF 10% 500V			
474		D	CAPACITOR		C929	1-126-794-11	ELECT 4.7MF 20% 25V			
475		D	CAPACITOR		C930	1-136-169-00	FILM 0.22MF 5% 50V			
476		D	CAPACITOR		C932	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
477		D	CAPACITOR		C933	1-126-786-11	ELECT 47MF 20% 16V			
478		D	CAPACITOR		C935	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
479		D	CAPACITOR		C936	1-163-009-91	CERAMIC CHIP 0.001MF 10% 50V			
480		D	CAPACITOR		C937	1-126-796-11	ELECT 22MF 20% 25V			
481		D	CAPACITOR		C938	1-126-935-11	ELECT 470MF 20% 16V			
482		D	CONNECTOR		CN501	1-793-239-11	PIN, CONNECTOR (PC BOARD) 6P			
483		D	CONNECTOR	*	CN601	1-580-689-11	PIN, CONNECTOR (PC BOARD) 4P			
484		D	CONNECTOR	*	CN602	1-691-960-11	PIN, CONNECTOR (PC BOARD) 3P			
485		D	CONNECTOR		CN604	1-770-724-11	CONNECTOR, BOARD TO BOARD 9P			
486		D	CONNECTOR	*	CN701	1-764-333-11	PLUG, CONNECTOR 10P			
487		D	CONNECTOR		CN904	1-695-915-11	TAB (CONTACT)			
488		D	CONNECTOR	*	CN1101	1-508-879-11	BASE POST 4P			
489		D	CONNECTOR		CN1102	1-774-628-11	CONNECTOR, BOARD TO BOARD 17P			
490		D	CONNECTOR	*	CN1103	1-564-511-11	PLUG, CONNECTOR 8P			
491		D	DIODE		D401	8-719-979-58	DIODE EGP10D			
492		D	DIODE		D405	8-719-109-85	ZENER DIODE RD5.1ESB2			
493		D	DIODE		D406	8-719-050-84	DIODE RB441Q-40T-77			
494		D	DIODE		D501	8-719-110-47	ZENER DIODE RD18ESB			
495		D	DIODE		D502	8-719-054-71	DIODE D5SC4M-F			
496		D	DIODE		D503	8-719-110-47	ZENER DIODE RD18ESB			
497		D	DIODE		D504	8-719-066-36	DIODE FMQ-G5GS			
498		D	DIODE		D505	8-719-052-86	DIODE D2L40-TA			
499		D	DIODE		D506	8-719-062-89	ZENER DIODE HZS5B2-TE			
500		D	DIODE		D509	8-719-404-50	DIODE MA111-TX			
501		D	DIODE		D510	8-719-941-75	DIODE ERB91-02TP1			
502		D	DIODE		D512	8-719-911-19	DIODE 1SS119-25			
503		D	DIODE		D516	8-719-052-90	DIODE D1NL40-TA2			
504		D	DIODE		D517	8-719-941-75	DIODE ERB91-02TP1			
505		D	DIODE		D518	8-719-050-84	DIODE RB441Q-40T-77			
506		D	DIODE		D519	8-719-069-54	ZENER DIODE UDZSTE-175.1B			
507		D	DIODE		D520	8-719-911-19	DIODE 1SS119-25			
508		D	DIODE		D521	8-719-911-19	DIODE 1SS119-25			
509		D	DIODE	!	D610	8-719-510-53	DIODE D4SB60L			
510		D	DIODE		D613	8-719-304-63	DIODE RM11C			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
511		D	DIODE		D631	8-719-063-73	DIODE D1NL20U-TR			
512		D	DIODE		D632	8-719-059-23	DIODE P6KE200AG23			
513		D	DIODE		D633	8-719-069-63	DIODE ERB38-06V1			
514		D	DIODE		D634	8-719-063-73	DIODE D1NL20U-TR			
515		D	DIODE		D635	8-719-110-67	ZENER DIODE RD27ES-B2			
516		D	DIODE		D641	8-719-069-63	DIODE ERB38-06V1			
517		D	DIODE		D643	8-719-404-50	DIODE MA111-TX			
518		D	DIODE		D644	8-719-404-50	DIODE MA111-TX			
519		D	DIODE		D650	8-719-064-49	DIODE D4SBL40			
520		D	DIODE		D651	8-719-052-90	DIODE D1NL40-TA2			
521		D	DIODE		D652	8-719-052-91	DIODE D4SBS4-F			
522		D	DIODE		D680	8-719-079-00	DIODE FCH10A15			
523		D	DIODE		D690	8-719-911-19	DIODE 1SS119-25			
524		D	DIODE		D692	8-719-911-19	DIODE 1SS119-25			
525		D	DIODE		D694	8-719-911-19	DIODE 1SS119-25			
526		D	DIODE		D697	8-719-404-50	DIODE MA111-TX			
527		D	DIODE		D701	8-719-911-19	DIODE 1SS119-25			
528		D	DIODE		D702	8-719-911-19	DIODE 1SS119-25			
529		D	DIODE		D703	8-719-911-19	DIODE 1SS119-25			
530		D	DIODE		D705	8-719-404-50	DIODE MA111-TX			
531		D	DIODE		D706	8-719-069-54	ZENER DIODE UdzSTE-175.1B			
532		D	DIODE		D901	8-719-404-50	DIODE MA111-TX			
533		D	DIODE		D906	8-719-977-40	ZENER DIODE DTZ13B			
534		D	DIODE		D907	8-719-052-86	DIODE D2L40-TA			
535		D	DIODE		D909	8-719-110-47	ZENER DIODE RD18ESB			
536		D	DIODE		D910	8-719-028-72	DIODE RGP02-17EL-6433			
537		D	DIODE		D911	8-719-018-82	DIODE RGP02-20EL-6394			
538		D	DIODE		D912	8-719-110-42	ZENER DIODE RD15ES-B3			
539		D	DIODE		D914	8-719-970-83	DIODE HSS82-TJ			
540		D	DIODE		D917	8-719-069-60	ZENER DIODE UdzSTE-179.1B			
541		D	DIODE		D918	8-719-404-50	DIODE MA111-TX			
542		D	DIODE		D919	8-719-069-54	ZENER DIODE UdzSTE-175.1B			
543		D	DIODE		D920	8-719-977-28	ZENER DIODE DTZ10B			
544		D	DIODE		D921	8-719-911-19	DIODE 1SS119-25			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
545		D	DIODE		D922	8-719-404-50	DIODE MA111-TX			
546		D	DIODE		D923	8-719-404-50	DIODE MA111-TX			
547		D	FUSE	!	F601	1-576-233-11	FUSE (H.B.C.) (6.3A/250V)			
548		D	FERRITE BEAD		FB501	1-410-397-21	FERRITE 1.1uH			
549		D	CHIP CONDUCTOR		FB555	1-216-295-91	SHORT 0			
550		D	FERRITE BEAD		FB901	1-412-911-11	FERRITE 1.1uH			
551		D	FERRITE BEAD		FB902	1-414-231-22	FERRITE 0uH			
552		N	FERRITE BEAD		FB1000	1-414-231-22	FERRITE 0uH			
553		N	CHIP CONDUCTOR		FB1002	1-216-295-91	SHORT 0			
554		N	CHIP CONDUCTOR		FB1005	1-216-295-91	SHORT 0			
555		N	CHIP CONDUCTOR		FB1007	1-216-295-91	SHORT 0			
556		D	FUSE HOLDER		FH601	1-533-223-11	HOLDER, FUSE			
557		D	FUSE HOLDER		FH602	1-533-223-11	HOLDER, FUSE			
558		D	IC		IC401	8-759-192-71	IC STV9379			
559		D	IC		IC501	8-759-585-82	IC BA9759F-E2			
560		D	IC		IC610	8-749-018-08	IC MZ1532			
561		D	IC		IC620	8-759-670-30	IC MCZ3001D			
562		D	IC		IC630	8-759-535-32	IC FA13842P			
563		D	IC		IC640	8-749-018-07	IC SEB3-LF4			
564		D	IC		IC652	8-759-669-10	IC BA3953T-V5			
565		D	IC		IC654	8-759-701-79	IC NJM7812FA			
566		D	IC		IC680	8-759-682-42	IC MM1431ATT			
567		D	IC		IC701	8-759-822-38	IC LA6510			
568		D	IC		IC702	8-749-017-48	IC STK391-220			
569		D	RTV	*	IC703	7-322-065-48	RUBBER, SILICONE RTV (KE-3490)			
570		D	IC		IC703	8-759-803-42	IC LA6500-FA			
571		D	IC		IC901	8-759-585-81	IC BA9758FS-E2			
572		D	IC		IC902	8-759-701-01	IC NJM2904M			
573		D	CHIP CONDUCTOR		JR001	1-216-295-91	SHORT 0			
574		D	CHIP CONDUCTOR		JR002	1-216-296-11	SHORT 0			
575		D	CHIP CONDUCTOR		JR003	1-216-296-11	SHORT 0			
576		D	CHIP CONDUCTOR		JR004	1-216-296-11	SHORT 0			
577		D	CHIP CONDUCTOR		JR006	1-216-296-11	SHORT 0			
578		D	CHIP CONDUCTOR		JR007	1-216-295-91	SHORT 0			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
579		D	CHIP CONDUCTOR		JR008	1-216-296-11	SHORT 0			
580		D	CHIP CONDUCTOR		JR009	1-216-295-91	SHORT 0			
581		D	CHIP CONDUCTOR		JR012	1-216-296-11	SHORT 0			
582		D	CHIP CONDUCTOR		JR013	1-216-295-91	SHORT 0			
583		D	CHIP CONDUCTOR		JR014	1-216-296-11	SHORT 0			
584		D	CHIP CONDUCTOR		JR015	1-216-295-91	SHORT 0			
585		D	CHIP CONDUCTOR		JR016	1-216-296-11	SHORT 0			
586		D	CHIP CONDUCTOR		JR017	1-216-295-91	SHORT 0			
587		D	CHIP CONDUCTOR		JR018	1-216-295-91	SHORT 0			
588		D	CHIP CONDUCTOR		JR019	1-216-296-11	SHORT 0			
589		D	CHIP CONDUCTOR		JR022	1-216-296-11	SHORT 0			
590		D	RESISTOR		JW019	1-249-389-11	CARBON 4.7 5% 1/4W			
591		D	COIL		L501	1-412-537-31	INDUCTOR 100uH			
592		D	COIL		L502	1-419-871-11	COIL, HORIZONTAL LINEARITY			
593		D	COIL		L504	1-406-673-81	INDUCTOR 2.2MH			
594		D	COIL		L505	1-406-675-81	INDUCTOR 4.7MH			
595		D	COIL		L506	1-406-673-81	INDUCTOR 2.2MH			
596		D	COIL		L508	1-412-525-31	INDUCTOR 10uH			
597		D	COIL		L509	1-419-869-11	COIL, HORIZONTAL CENTERING			
598		D	COIL		L510	1-411-594-41	INDUCTOR 5MH			
599		D	COIL	!	L610	1-419-837-11	INDUCTOR 340uH			
600		D	COIL		L611	1-419-397-11	INDUCTOR 68uH			
601		D	COIL		L612	1-412-521-31	INDUCTOR 4.7uH			
602		D	COIL		L652	1-406-665-81	INDUCTOR 100uH			
603		D	COIL		L653	1-406-665-81	INDUCTOR 100uH			
604		D	COIL		L680	1-408-615-31	INDUCTOR 100uH			
605		D	COIL		L902	1-406-661-11	INDUCTOR 22uH			
606		D	FERRITE BEAD		L1001	1-412-911-11	FERRITE 1.1uH			
607		D	PHOTO COUPLER		PH610	8-749-018-06	PHOTO COUPLER TLP421F(D4-SONY			
608		D	PHOTO COUPLER		PH620	8-749-018-06	PHOTO COUPLER TLP421F(D4-SONY			
609		D	PHOTO COUPLER		PH630	8-749-018-06	PHOTO COUPLER TLP421F(D4-SONY			
610		D	TRANSISTOR		Q501	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
611		D	TRANSISTOR		Q502	8-729-055-24	TRANSISTOR KTC3876S-Y-RTK			
612		D	TRANSISTOR		Q503	8-729-055-27	TRANSISTOR KTA1505S-Y-RTK			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
613		D	TRANSISTOR		Q504	8-729-043-53	TRANSISTOR IRFU110			
614		D	TRANSISTOR		Q505	8-729-053-30	TRANSISTOR 2SC5570(LBSONY1			
615		D	TRANSISTOR		Q506	8-729-053-98	TRANSISTOR 2SJ569LS-CC11			
616		D	TRANSISTOR		Q507	8-729-120-28	TRANSISTOR 2SC1623-L5L6			
617		D	TRANSISTOR		Q508	8-729-055-24	TRANSISTOR KTC3876S-Y-RTK			
618		D	TRANSISTOR		Q509	8-729-055-27	TRANSISTOR KTA1505S-Y-RTK			
619		D	TRANSISTOR		Q510	8-729-423-33	TRANSISTOR 2SC3311A-QRSTA			
620		D	TRANSISTOR		Q511	8-729-046-62	TRANSISTOR FS30KMJ-3-AZ			
621		D	TRANSISTOR		Q512	8-729-046-62	TRANSISTOR FS30KMJ-3-AZ			
622		D	TRANSISTOR		Q513	8-729-046-62	TRANSISTOR FS30KMJ-3-AZ			
623		D	TRANSISTOR		Q514	8-729-053-82	TRANSISTOR FS10KMJ-3-AZ			
624		D	TRANSISTOR		Q515	8-729-053-82	TRANSISTOR FS10KMJ-3-AZ			
625		D	TRANSISTOR		Q516	8-729-053-82	TRANSISTOR FS10KMJ-3-AZ			
626		D	TRANSISTOR		Q517	8-729-053-82	TRANSISTOR FS10KMJ-3-AZ			
627		D	TRANSISTOR		Q519	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R			
628		D	TRANSISTOR		Q521	8-729-901-00	TRANSISTOR DTC124EK			
629		D	TRANSISTOR		Q523	8-729-027-31	TRANSISTOR DTA124EKA-T146			
630		D	TRANSISTOR		Q524	8-729-901-00	TRANSISTOR DTC124EK			
631		D	TRANSISTOR		Q610	8-729-029-55	TRANSISTOR DTA143ZSA-TP			
632		D	TRANSISTOR		Q611	8-729-029-96	TRANSISTOR DTC143XSA			
633		D	TRANSISTOR		Q630	8-729-045-03	TRANSISTOR 2SK2647-01MR-F91			
634		D	TRANSISTOR		Q640	8-729-052-29	TRANSISTOR 2SK2876-01MR-F1			
635		D	TRANSISTOR		Q641	8-729-052-29	TRANSISTOR 2SK2876-01MR-F1			
636		D	TRANSISTOR		Q652	8-729-029-66	TRANSISTOR DTC114ESA			
637		D	TRANSISTOR		Q701	8-729-800-32	TRANSISTOR 2SC2362K-G			
638		D	TRANSISTOR		Q702	8-729-178-43	TRANSISTOR 2SC2784			
639		D	TRANSISTOR		Q703	8-729-204-91	TRANSISTOR 2SA1049-GR			
640		D	TRANSISTOR		Q704	8-729-207-82	TRANSISTOR 2SC3421-Y			
641		D	TRANSISTOR		Q705	8-729-207-89	TRANSISTOR 2SA1358-Y			
642		D	TRANSISTOR		Q706	8-729-045-47	TRANSISTOR 2SC4620TV2Q			
643		D	TRANSISTOR		Q707	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R			
644		D	TRANSISTOR		Q901	8-729-035-54	TRANSISTOR 2SJ449			
645		D	TRANSISTOR		Q902	8-729-053-42	TRANSISTOR FS5KM-18A-AT			
646		D	TRANSISTOR		Q903	8-729-055-24	TRANSISTOR KTC3876S-Y-RTK			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
647		D	TRANSISTOR		Q904	8-729-055-27	TRANSISTOR KTA1505S-Y-RTK			
648		D	TRANSISTOR		Q905	8-729-046-80	TRANSISTOR 2SC4634LS-CB11			
649		D	TRANSISTOR		Q906	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R			
650		D	TRANSISTOR		Q907	8-729-424-02	TRANSISTOR 2SB709A-QRS-TX			
651		D	RESISTOR		R401	1-249-383-11	CARBON 1.5 5% 1/4W			
652		D	RESISTOR		R402	1-215-867-00	METAL OXIDE 470 5% 1W			
653		D	RESISTOR		R403	1-214-796-00	METAL 1.5 1% 1/2W			
654		D	RESISTOR		R404	1-215-449-00	METAL 15K 1% 1/4W			
655		D	RESISTOR		R405	1-214-796-00	METAL 1.5 1% 1/2W			
656		D	RESISTOR		R406	1-215-451-00	METAL 18K 1% 1/4W			
657		D	RESISTOR		R407	1-216-675-91	METAL CHIP 10K 0.5% 1/10W			
658		D	RESISTOR		R408	1-216-097-11	RES-CHIP 100K 5% 1/10W			
659		D	RESISTOR		R409	1-216-679-11	METAL CHIP 15K 0.5% 1/10W			
660		D	RESISTOR		R410	1-216-681-11	METAL CHIP 18K 0.5% 1/10W			
661		D	RESISTOR		R501	1-216-049-11	RES-CHIP 1K 5% 1/10W			
662		D	RESISTOR		R502	1-216-025-11	RES-CHIP 100 5% 1/10W			
663		D	RESISTOR		R503	1-216-033-00	RES-CHIP 220 5% 1/10W			
664		D	RESISTOR		R504	1-216-073-91	RES-CHIP 10K 5% 1/10W			
665		D	RESISTOR		R505	1-216-081-00	RES-CHIP 22K 5% 1/10W			
666		D	RESISTOR		R506	1-249-393-11	CARBON 10 5% 1/4W			
667		D	RESISTOR		R507	1-249-433-11	CARBON 22K 5% 1/4W			
668		D	RESISTOR		R508	1-215-861-00	METAL OXIDE 47 5% 1W			
669		D	RESISTOR		R509	1-249-377-11	CARBON 0.47 5% 1/4W			
670		D	RESISTOR		R510	1-219-726-11	METAL 2.2 5% 10W			
671		D	RESISTOR		R511	1-216-683-11	METAL CHIP 22K 0.5% 1/10W			
672		D	RESISTOR		R512	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
673		D	RESISTOR		R513	1-216-423-11	METAL OXIDE 27 5% 1W			
674		D	RESISTOR		R514	1-249-397-11	CARBON 22 5% 1/4W			
675		D	RESISTOR		R515	1-249-425-11	CARBON 4.7K 5% 1/4W			
676		D	RESISTOR		R516	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
677		D	RESISTOR		R517	1-216-089-91	RES-CHIP 47K 5% 1/10W			
678		D	RESISTOR		R518	1-216-033-00	RES-CHIP 220 5% 1/10W			
679		D	RESISTOR		R519	1-216-037-00	RES-CHIP 330 5% 1/10W			
680		D	RESISTOR		R520	1-216-033-00	RES-CHIP 220 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
681		D	RESISTOR		R521	1-247-807-31	CARBON 100 5% 1/4W			
682		D	RESISTOR		R522	1-216-049-11	RES-CHIP 1K 5% 1/10W			
683		D	RESISTOR		R523	1-216-685-11	METAL CHIP 27K 0.5% 1/10W			
684		D	RESISTOR		R524	1-216-663-11	METAL CHIP 3.3K 0.5% 1/10W			
685		D	RESISTOR		R525	1-216-657-11	METAL CHIP 1.8K 0.5% 1/10W			
686		D	RESISTOR		R526	1-216-691-11	METAL CHIP 47K 0.5% 1/10W			
687		D	RESISTOR		R527	1-216-683-11	METAL CHIP 22K 0.5% 1/10W			
688		D	RESISTOR		R528	1-215-453-00	METAL 22K 1% 1/4W			
689		D	RESISTOR		R530	1-216-662-11	METAL CHIP 3K 0.5% 1/10W			
690		D	RESISTOR		R531	1-216-661-11	METAL CHIP 2.7K 0.5% 1/10W			
691		D	RESISTOR		R532	1-216-081-00	RES-CHIP 22K 5% 1/10W			
692		D	RESISTOR		R533	1-216-681-11	METAL CHIP 18K 0.5% 1/10W			
693		D	RESISTOR		R534	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
694		D	RESISTOR		R536	1-215-863-11	METAL OXIDE 100 5% 1W			
695		D	RESISTOR		R537	1-216-659-11	METAL CHIP 2.2K 0.5% 1/10W			
696		D	RESISTOR		R541	1-216-089-91	RES-CHIP 47K 5% 1/10W			
697		D	RESISTOR		R542	1-214-842-11	METAL 120 1% 1/2W			
698		D	RESISTOR		R545	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
699		D	RESISTOR		R546	1-215-890-11	METAL OXIDE 470 5% 2W			
700		D	RESISTOR		R547	1-215-387-00	METAL 39 1% 1/4W			
701		D	RESISTOR		R548	1-260-316-51	CARBON 100 5% 1/2W			
702		D	RESISTOR		R549	1-260-312-11	CARBON 47 5% 1/2W			
703		D	RESISTOR		R550	1-249-437-11	CARBON 47K 5% 1/4W			
704		D	RESISTOR		R552	1-249-437-11	CARBON 47K 5% 1/4W			
705		D	RESISTOR		R553	1-249-437-11	CARBON 47K 5% 1/4W			
706		D	RESISTOR		R555	1-249-437-11	CARBON 47K 5% 1/4W			
707		D	RESISTOR		R557	1-249-437-11	CARBON 47K 5% 1/4W			
708		D	RESISTOR		R559	1-249-437-11	CARBON 47K 5% 1/4W			
709		D	RESISTOR		R561	1-249-437-11	CARBON 47K 5% 1/4W			
710		D	RESISTOR		R563	1-216-025-11	RES-CHIP 100 5% 1/10W			
711		D	RESISTOR		R564	1-216-049-11	RES-CHIP 1K 5% 1/10W			
712		D	RESISTOR		R565	1-216-025-11	RES-CHIP 100 5% 1/10W			
713		D	RESISTOR		R566	1-216-025-11	RES-CHIP 100 5% 1/10W			
714		D	RESISTOR		R567	1-216-025-11	RES-CHIP 100 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
715		D	RESISTOR		R568	1-216-025-11	RES-CHIP 100 5% 1/10W			
716		D	RESISTOR		R570	1-214-842-11	METAL 120 1% 1/2W			
717		D	RESISTOR		R571	1-214-842-11	METAL 120 1% 1/2W			
718		D	RESISTOR		R572	1-216-025-11	RES-CHIP 100 5% 1/10W			
719		D	RESISTOR		R573	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
720		D	CHIP CONDUCTOR		R574	1-216-295-91	SHORT 0			
721		D	RESISTOR		R575	1-216-041-00	RES-CHIP 470 5% 1/10W			
722		D	RESISTOR		R577	1-163-009-91	CERAMIC CHIP 0.001MF 10% 50V			
723		D	RESISTOR		R578	1-216-049-11	RES-CHIP 1K 5% 1/10W			
724		D	RESISTOR		R579	1-216-049-11	RES-CHIP 1K 5% 1/10W			
725		D	RESISTOR		R580	1-249-413-11	CARBON 470 5% 1/4W			
726		D	RESISTOR		R581	1-249-437-11	CARBON 47K 5% 1/4W			
727		D	RESISTOR		R583	1-216-025-11	RES-CHIP 100 5% 1/10W			
728		D	RESISTOR		R584	1-215-909-11	METAL OXIDE 47 5% 3W			
729		D	RESISTOR		R585	1-216-381-11	METAL OXIDE 0.22 5% 3W			
730		D	RESISTOR		R586	1-215-909-11	METAL OXIDE 47 5% 3W			
731		D	RESISTOR		R588	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
732		D	RESISTOR		R589	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
733		D	RESISTOR		R590	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
734		D	RESISTOR		R591	1-249-425-11	CARBON 4.7K 5% 1/4W			
735		D	RESISTOR		R592	1-249-425-11	CARBON 4.7K 5% 1/4W			
736		D	RESISTOR		R593	1-216-073-91	RES-CHIP 10K 5% 1/10W			
737		D	RESISTOR		R594	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
738		D	RESISTOR		R596	1-247-807-31	CARBON 100 5% 1/4W			
739		D	RESISTOR		R598	1-216-665-11	METAL CHIP 3.9K 0.5% 1/10W			
740		D	RESISTOR		R599	1-216-699-91	METAL CHIP 100K 0.5% 1/10W			
741		D	RESISTOR	!	R601	1-220-825-11	CARBON 330K 5% 1/2W			
742		D	RESISTOR		R610	1-217-152-00	METAL 0.33 10% 2W			
743		D	RESISTOR		R611	1-217-153-00	METAL 0.47 10% 2W			
744		D	RESISTOR		R612	1-247-807-31	CARBON 100 5% 1/4W			
745		D	RESISTOR		R614	1-247-807-31	CARBON 100 5% 1/4W			
746		D	RESISTOR		R615	1-249-427-11	CARBON 6.8K 5% 1/4W			
747		D	RESISTOR		R617	1-216-073-91	RES-CHIP 10K 5% 1/10W			
748		D	RESISTOR		R618	1-216-049-11	RES-CHIP 1K 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
749		D	RESISTOR	!	R620	1-202-933-61	FUSIBLE 0.1 10% 1/2W			
750		D	RESISTOR		R629	1-216-679-11	METAL CHIP 15K 0.5% 1/10W			
751		D	RESISTOR		R630	1-249-381-11	CARBON 1 5% 1/4W			
752		D	RESISTOR		R631	1-216-349-00	METAL OXIDE 1 5% 1W			
753		D	RESISTOR		R632	1-216-081-00	RES-CHIP 22K 5% 1/10W			
754		D	RESISTOR		R633	1-249-406-11	CARBON 120 5% 1/4W			
755		D	RESISTOR		R634	1-249-417-11	CARBON 1K 5% 1/4W			
756		D	RESISTOR		R635	1-260-135-11	CARBON 1M 5% 1/2W			
757		D	RESISTOR		R636	1-260-135-11	CARBON 1M 5% 1/2W			
758		D	RESISTOR		R637	1-216-069-00	RES-CHIP 6.8K 5% 1/10W			
759		D	RESISTOR		R638	1-216-073-91	RES-CHIP 10K 5% 1/10W			
760		D	RESISTOR		R639	1-249-419-11	CARBON 1.5K 5% 1/4W			
761		D	RESISTOR		R640	1-249-420-11	CARBON 1.8K 5% 1/4W			
762		D	RESISTOR		R641	1-216-073-91	RES-CHIP 10K 5% 1/10W			
763		D	RESISTOR		R642	1-216-001-00	RES-CHIP 10 5% 1/10W			
764		D	RESISTOR		R643	1-243-979-71	METAL OXIDE 0.1 5% 2W			
765		D	RESISTOR		R645	1-216-073-91	RES-CHIP 10K 5% 1/10W			
766		D	RESISTOR		R646	1-216-001-00	RES-CHIP 10 5% 1/10W			
767		D	RESISTOR		R647	1-219-512-11	CARBON 2.2M 5% 1/2W			
768		D	RESISTOR		R651	1-215-421-00	METAL 1K 1% 1/4W			
769		D	RESISTOR		R652	1-216-081-00	RES-CHIP 22K 5% 1/10W			
770		D	RESISTOR		R653	1-216-671-11	METAL CHIP 6.8K 0.5% 1/10W			
771		D	RESISTOR		R654	1-216-017-91	RES-CHIP 47 5% 1/10W			
772		D	RESISTOR		R655	1-216-049-11	RES-CHIP 1K 5% 1/10W			
773		D	RESISTOR		R656	1-216-025-11	RES-CHIP 100 5% 1/10W			
774		D	RESISTOR		R660	1-216-667-11	METAL CHIP 4.7K 0.5% 1/10W			
775		D	CHIP CONDUCTOR		R661	1-216-295-91	SHORT 0			
776		D	RESISTOR		R665	1-249-421-11	CARBON 2.2K 5% 1/4W			
777		D	RESISTOR		R670	1-216-679-11	METAL CHIP 15K 0.5% 1/10W			
778		D	RESISTOR		R671	1-216-675-91	METAL CHIP 10K 0.5% 1/10W			
779		D	RESISTOR		R675	1-219-512-11	CARBON 2.2M 5% 1/2W			
780		D	RESISTOR		R676	1-218-756-11	METAL CHIP 150K 0.5% 1/10W			
781		D	RESISTOR		R686	1-216-033-00	RES-CHIP 220 5% 1/10W			
782		D	RESISTOR		R687	1-216-081-00	RES-CHIP 22K 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
783		D	RESISTOR		R691	1-244-160-91	METAL 36K 0.5% 1/4W			
784		D	RESISTOR		R692	1-244-160-91	METAL 36K 0.5% 1/4W			
785		D	RESISTOR		R693	1-244-160-91	METAL 36K 0.5% 1/4W			
786		D	RESISTOR		R694	1-243-985-91	METAL 33K 0.5% 1/4W			
787		D	RESISTOR		R696	1-260-092-11	CARBON 270 5% 1/2W			
788		D	RESISTOR		R698	1-216-679-11	METAL CHIP 15K 0.5% 1/10W			
789		D	RESISTOR		R699	1-216-647-11	METAL CHIP 680 0.5% 1/10W			
790		D	RESISTOR		R700	1-216-095-00	RES-CHIP 82K 5% 1/10W			
791		D	RESISTOR		R701	1-249-385-11	CARBON 2.2 5% 1/4W			
792		D	RESISTOR		R702	1-216-073-91	RES-CHIP 10K 5% 1/10W			
793		D	RESISTOR		R703	1-249-385-11	CARBON 2.2 5% 1/4W			
794		D	RESISTOR		R704	1-216-049-11	RES-CHIP 1K 5% 1/10W			
795		D	RESISTOR		R706	1-215-887-00	METAL OXIDE 150 5% 2W			
796		D	RESISTOR		R707	1-249-440-11	CARBON 82K 5% 1/4W			
797		D	RESISTOR		R709	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
798		D	RESISTOR		R710	1-216-673-11	METAL CHIP 8.2K 0.5% 1/10W			
799		D	RESISTOR		R711	1-216-674-11	METAL CHIP 9.1K 0.5% 1/10W			
800		D	RESISTOR		R712	1-249-425-11	CARBON 4.7K 5% 1/4W			
801		D	RESISTOR		R713	1-215-887-00	METAL OXIDE 150 5% 2W			
802		D	RESISTOR		R716	1-249-385-11	CARBON 2.2 5% 1/4W			
803		D	RESISTOR		R717	1-249-385-11	CARBON 2.2 5% 1/4W			
804		D	RESISTOR		R718	1-215-866-11	METAL OXIDE 330 5% 1W			
805		D	RESISTOR		R719	1-216-373-11	METAL OXIDE 2.2 5% 2W			
806		D	RESISTOR		R721	1-216-675-91	METAL CHIP 10K 0.5% 1/10W			
807		D	RESISTOR		R722	1-215-866-11	METAL OXIDE 330 5% 1W			
808		D	RESISTOR		R724	1-216-675-91	METAL CHIP 10K 0.5% 1/10W			
809		D	RESISTOR		R725	1-216-373-11	METAL OXIDE 2.2 5% 2W			
810		D	RESISTOR		R726	1-216-673-11	METAL CHIP 8.2K 0.5% 1/10W			
811		D	RESISTOR		R727	1-216-673-11	METAL CHIP 8.2K 0.5% 1/10W			
812		D	RESISTOR		R728	1-216-675-91	METAL CHIP 10K 0.5% 1/10W			
813		D	RESISTOR		R729	1-216-673-11	METAL CHIP 8.2K 0.5% 1/10W			
814		D	RESISTOR		R731	1-216-081-00	RES-CHIP 22K 5% 1/10W			
815		D	RESISTOR		R732	1-249-383-11	CARBON 1.5 5% 1/4W			
816		D	RESISTOR		R733	1-215-859-00	METAL OXIDE 22 5% 1W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
817		D	RESISTOR		R734	1-215-865-11	METAL OXIDE 220 5% 1W			
818		D	RESISTOR		R735	1-216-667-11	METAL CHIP 4.7K 0.5% 1/10W			
819		D	RESISTOR		R737	1-216-059-00	RES-CHIP 2.7K 5% 1/10W			
820		D	RESISTOR		R738	1-216-069-00	RES-CHIP 6.8K 5% 1/10W			
821		D	RESISTOR		R739	1-249-434-11	CARBON 27K 5% 1/4W			
822		D	RESISTOR		R740	1-216-089-91	RES-CHIP 47K 5% 1/10W			
823		D	RESISTOR		R741	1-216-049-11	RES-CHIP 1K 5% 1/10W			
824		D	RESISTOR		R742	1-216-668-11	METAL CHIP 5.1K 0.5% 1/10W			
825		D	RESISTOR		R743	1-216-037-00	RES-CHIP 330 5% 1/10W			
826		D	RESISTOR		R744	1-249-413-11	CARBON 470 5% 1/4W			
827		D	RESISTOR		R745	1-249-389-11	CARBON 4.7 5% 1/4W			
828		D	RESISTOR		R746	1-249-389-11	CARBON 4.7 5% 1/4W			
829		D	RESISTOR		R747	1-215-881-11	METAL OXIDE 15 5% 2W			
830		D	RESISTOR		R748	1-219-510-11	CARBON 470K 5% 1/2W			
831		D	RESISTOR		R749	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
832		D	RESISTOR		R753	1-249-393-11	CARBON 10 5% 1/4W			
833		D	RESISTOR		R754	1-216-675-91	METAL CHIP 10K 0.5% 1/10W			
834		D	RESISTOR		R755	1-216-673-11	METAL CHIP 8.2K 0.5% 1/10W			
835		D	RESISTOR		R756	1-249-421-11	CARBON 2.2K 5% 1/4W			
836		D	RESISTOR		R757	1-216-073-91	RES-CHIP 10K 5% 1/10W			
837		D	RESISTOR		R758	1-249-385-11	CARBON 2.2 5% 1/4W			
838		D	RESISTOR		R759	1-249-385-11	CARBON 2.2 5% 1/4W			
839		D	RESISTOR		R760	1-216-093-91	RES-CHIP 68K 5% 1/10W			
840		D	RESISTOR		R901	1-216-097-11	RES-CHIP 100K 5% 1/10W			
841		D	RESISTOR		R902	1-216-089-91	RES-CHIP 47K 5% 1/10W			
842		D	RESISTOR		R903	1-218-758-11	METAL CHIP 180K 0.5% 1/10W			
843		D	RESISTOR		R904	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
844		D	RESISTOR		R905	1-216-049-11	RES-CHIP 1K 5% 1/10W			
845		D	RESISTOR		R907	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
846		D	RESISTOR		R908	1-249-429-11	CARBON 10K 5% 1/4W			
847		D	RESISTOR		R909	1-219-727-11	METAL 68 5% 10W			
848		D	RESISTOR		R911	1-249-401-11	CARBON 47 5% 1/4W			
849		D	RESISTOR		R912	1-216-049-11	RES-CHIP 1K 5% 1/10W			
850		D	RESISTOR		R914	1-216-041-00	RES-CHIP 470 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
851		D	RESISTOR		R915	1-249-397-11	CARBON 22 5% 1/4W			
852		D	RESISTOR		R916	1-249-401-11	CARBON 47 5% 1/4W			
853		D	RESISTOR		R917	1-249-385-11	CARBON 2.2 5% 1/4W			
854		D	RESISTOR		R918	1-214-935-00	METAL 820K 1% 1/2W			
855		D	RESISTOR		R919	1-216-073-91	RES-CHIP 10K 5% 1/10W			
856		D	RESISTOR		R920	1-216-693-11	METAL CHIP 56K 0.5% 1/10W			
857		D	RESISTOR		R921	1-249-425-11	CARBON 4.7K 5% 1/4W			
858		D	RESISTOR		R923	1-215-467-00	METAL 82K 1% 1/4W			
859		D	RESISTOR		R924	1-216-675-91	METAL CHIP 10K 0.5% 1/10W			
860		D	RESISTOR		R925	1-218-762-11	METAL CHIP 270K 0.5% 1/10W			
861		D	RESISTOR		R926	1-216-083-00	RES-CHIP 27K 5% 1/10W			
862		D	RESISTOR		R927	1-219-748-11	CARBON 4.7K 5% 1/2W			
863		D	RESISTOR		R928	1-220-825-11	CARBON 330K 5% 1/2W			
864		D	RESISTOR		R929	1-216-089-91	RES-CHIP 47K 5% 1/10W			
865		D	RESISTOR		R931	1-219-748-11	CARBON 4.7K 5% 1/2W			
866		D	RESISTOR		R932	1-216-665-11	METAL CHIP 3.9K 0.5% 1/10W			
867		D	RESISTOR		R933	1-216-661-11	METAL CHIP 2.7K 0.5% 1/10W			
868		D	RESISTOR		R934	1-260-300-11	CARBON 4.7 5% 1/2W			
869		D	RESISTOR		R935	1-215-433-00	METAL 3.3K 1% 1/4W			
870		D	RESISTOR		R936	1-219-398-51	METAL 2.2M 5% 1W			
871		D	RESISTOR		R937	1-216-049-11	RES-CHIP 1K 5% 1/10W			
872		D	RESISTOR		R938	1-216-111-00	RES-CHIP 390K 5% 1/10W			
873		D	RESISTOR		R939	1-216-095-00	RES-CHIP 82K 5% 1/10W			
874		D	RESISTOR		R940	1-216-109-00	RES-CHIP 330K 5% 1/10W			
875		D	RESISTOR		R941	1-219-621-91	METAL 22M 10% 1/4W			
876		D	RESISTOR		R942	1-216-121-11	RES-CHIP 1M 5% 1/10W			
877		D	RESISTOR		R943	1-216-097-11	RES-CHIP 100K 5% 1/10W			
878		D	RESISTOR		R944	1-216-049-11	RES-CHIP 1K 5% 1/10W			
879		D	RESISTOR		R945	1-216-025-11	RES-CHIP 100 5% 1/10W			
880		D	RESISTOR		R946	1-216-073-91	RES-CHIP 10K 5% 1/10W			
881		D	RESISTOR		R950	1-216-049-11	RES-CHIP 1K 5% 1/10W			
882		D	RESISTOR		R951	1-216-097-11	RES-CHIP 100K 5% 1/10W			
883		D	RESISTOR		R952	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
884		D	RESISTOR		R953	1-216-129-00	RES-CHIP 2.2M 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
885		D	RESISTOR		R954	1-218-179-11	RES-CHIP 10M 5% 1/10W			
886		D	RESISTOR		R955	1-218-179-11	RES-CHIP 10M 5% 1/10W			
887		D	VARIABLE RESISTOR	!	RV901	1-241-767-21	RES, ADJ, CERMET 100K (HV ADJ)			
888		D	VR COVER		RV901	3-710-578-01	COVER, VOLUME, 6 MOLD			
889		D	RTV	*	RV901	7-322-065-48	RUBBER, SILICONE RTV (KE-3490)			
890		D	RELAY	!	RY602	1-755-318-11	RELAY (AC POWER)			
891		D	RELAY	!	RY603	1-755-067-21	RELAY			
892		D	SWITCH		S501	1-692-465-11	SWITCH, SLIDE (RASTER CENTER TAP SWITCH)			
893		D	SWITCH	!	S601	1-771-727-11	SWITCH, AC POWER PUSH (POWER)			
894		D	SPARK GAP		SG601	1-533-982-21	GAP, SPARK			
895		D	SPARK GAP		SG901	1-517-499-21	GAP, SPARK			
896		D	SPARK GAP		SG902	1-519-422-11	GAP, SPARK			
897		D	SPARK GAP		SG903	1-519-422-11	GAP, SPARK			
898		D	TRANSFORMER		T501	1-435-188-11	TRANSFORMER, FERRITE (HDT)			
899		D	TRANSFORMER		T503	1-435-140-21	TRANSFORMER, FERRITE (LCT)			
900		D	TRANSFORMER		T504	1-431-413-11	TRANSFORMER, FERRITE (HST)			
901		D	TRANSFORMER	!	T601	1-429-180-11	TRANSFORMER, LINE FILTER			
902		D	TRANSFORMER	!	T620	1-435-748-31	TRANSFORMER, CONVERTER (PIT)			
903		D	TRANSFORMER	!	T630	1-435-751-31	TRANSFORMER, CONVERTER (SRT)			
904		D	TRANSFORMER		T701	1-435-142-31	TRANSFORMER, FERRITE (DFT)			
905		D	TRANSFORMER	!	T901	1-453-359-11	TRANSFORMER ASSY, FLYBACK (NX-4702/KM7E)			
906		D	COIL		T902	1-419-345-11	INDUCTOR 500uH			
907		D	THERMISTOR		TH401	1-807-925-11	THERMISTOR			
908		D	THERMISTOR	!	TH601	1-809-260-11	THERMISTOR, NEC (NTH22D6R0QA)			
909		D	THERMISTOR	!	THP602	1-809-827-11	THERMISTOR, POSITIVE			
910		D	VARISTOR	!	VDR601	1-803-918-11	VARISTOR (TNR14V621K660)			
911		D	VARISTOR	!	VDR602	1-810-622-11	VARISTOR			
912		DA	CAPACITOR		C1101	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
913		DA	CAPACITOR		C1102	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
914		DA	CAPACITOR		C1103	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
915		DA	CAPACITOR		C1104	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
916		DA	CAPACITOR		C1105	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
917		DA	CAPACITOR		C1108	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
918		DA	CAPACITOR		C1109	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
919		DA	CAPACITOR		C1110	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
920		DA	CAPACITOR		C1111	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
921		DA	CAPACITOR		C1112	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
922		DA	CAPACITOR		C1113	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
923		DA	CAPACITOR		C1114	1-163-017-00	CERAMIC CHIP 0.0047MF 10% 50V			
924		DA	CAPACITOR		C1115	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
925		DA	CAPACITOR		C1116	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
926		DA	CAPACITOR		C1117	1-163-019-00	CERAMIC CHIP 0.0068MF 10% 50V			
927		DA	CAPACITOR		C1118	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
928		DA	CAPACITOR		C1119	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
929		DA	CAPACITOR		C1120	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
930		DA	CAPACITOR		C1121	1-163-019-00	CERAMIC CHIP 0.0068MF 10% 50V			
931		DA	CAPACITOR		C1122	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
932		DA	CAPACITOR		C1123	1-163-809-11	CERAMIC CHIP 0.047MF 10% 25V			
933		DA	CAPACITOR		C1124	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
934		DA	CAPACITOR		C1125	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
935		DA	CAPACITOR		C1126	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
936		DA	CAPACITOR		C1127	1-125-838-11	CERAMIC CHIP 2.2MF 10% 6.3V			
937		DA	CAPACITOR		C1128	1-126-246-11	ELECT CHIP 220MF 20% 4V			
938		DA	CAPACITOR		C1129	1-163-007-11	CERAMIC CHIP 680pF 10% 50V			
939		DA	CAPACITOR		C1130	1-164-492-11	CERAMIC CHIP 0.15MF 10% 16V			
940		DA	CAPACITOR		C1131	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
941		DA	CAPACITOR		C1132	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
942		DA	CAPACITOR		C1133	1-126-246-11	ELECT CHIP 220MF 20% 4V			
943		DA	CAPACITOR		C1137	1-126-205-11	ELECT CHIP 47MF 20% 6.3V			
944		DA	CAPACITOR		C1138	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
945		DA	CAPACITOR		C1139	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
946		DA	CAPACITOR		C1140	1-163-251-11	CERAMIC CHIP 100pF 5% 50V			
947		DA	DIODE		D1104	8-719-027-76	DIODE 1SS357-TPH3			
948		DA	DIODE		D1105	8-719-067-40	ZENER DIODE STZ6.8N-T146			
949		DA	DIODE		D1106	8-719-067-40	ZENER DIODE STZ6.8N-T146			
950		DA	DIODE		D1107	8-719-067-40	ZENER DIODE STZ6.8N-T146			
951		DA	FERRITE BEAD		FB1101	1-543-963-22	FERRITE			
952		DA	IC		IC1101	8-759-697-78	IC CXD9563Q			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
953		DA	IC		IC1102	8-759-701-01	IC NJM2904M			
954		DA	RESISTOR		R1101	1-216-025-11	RES-CHIP 100 5% 1/10W			
955		DA	RESISTOR		R1102	1-216-057-00	RES-CHIP 2.2K 5% 1/10W			
956		DA	RESISTOR		R1103	1-216-025-11	RES-CHIP 100 5% 1/10W			
957		DA	RESISTOR		R1106	1-216-691-11	METAL CHIP 47K 0.5% 1/10W			
958		DA	RESISTOR		R1108	1-216-067-00	RES-CHIP 5.6K 5% 1/10W			
959		DA	RESISTOR		R1109	1-216-067-00	RES-CHIP 5.6K 5% 1/10W			
960		DA	RESISTOR		R1110	1-216-675-91	METAL CHIP 10K 0.5% 1/10W			
961		DA	RESISTOR		R1111	1-216-673-11	METAL CHIP 8.2K 0.5% 1/10W			
962		DA	RESISTOR		R1112	1-216-073-91	RES-CHIP 10K 5% 1/10W			
963		DA	RESISTOR		R1113	1-216-665-11	METAL CHIP 3.9K 0.5% 1/10W			
964		DA	RESISTOR		R1114	1-216-049-11	RES-CHIP 1K 5% 1/10W			
965		DA	RESISTOR		R1115	1-216-691-11	METAL CHIP 47K 0.5% 1/10W			
966		DA	RESISTOR		R1116	1-216-655-11	METAL CHIP 1.5K 0.5% 1/10W			
967		DA	RESISTOR		R1118	1-216-073-91	RES-CHIP 10K 5% 1/10W			
968		DA	RESISTOR		R1119	1-216-049-11	RES-CHIP 1K 5% 1/10W			
969		DA	RESISTOR		R1122	1-216-659-11	METAL CHIP 2.2K 0.5% 1/10W			
970		DA	RESISTOR		R1123	1-216-656-11	METAL CHIP 1.6K 0.5% 1/10W			
971		DA	RESISTOR		R1124	1-216-643-11	METAL CHIP 470 0.5% 1/10W			
972		DA	RESISTOR		R1125	1-216-659-11	METAL CHIP 2.2K 0.5% 1/10W			
973		DA	RESISTOR		R1126	1-216-642-11	METAL CHIP 430 0.5% 1/10W			
974		DA	RESISTOR		R1127	1-216-073-91	RES-CHIP 10K 5% 1/10W			
975		DA	RESISTOR		R1128	1-216-105-91	RES-CHIP 220K 5% 1/10W			
976		DA	RESISTOR		R1129	1-216-683-11	METAL CHIP 22K 0.5% 1/10W			
977		DA	RESISTOR		R1131	1-216-025-11	RES-CHIP 100 5% 1/10W			
978		DA	RESISTOR		R1132	1-216-025-11	RES-CHIP 100 5% 1/10W			
979		DA	RESISTOR		R1133	1-216-121-11	RES-CHIP 1M 5% 1/10W			
980		DA	RESISTOR		R1134	1-216-663-11	METAL CHIP 3.3K 0.5% 1/10W			
981		DA	RESISTOR		R1135	1-216-121-11	RES-CHIP 1M 5% 1/10W			
982		DA	RESISTOR		R1136	1-216-049-11	RES-CHIP 1K 5% 1/10W			
983		DA	RESISTOR		R1137	1-218-758-11	METAL CHIP 180K 0.5% 1/10W			
984		DA	RESISTOR		R1139	1-216-691-11	METAL CHIP 47K 0.5% 1/10W			
985		DA	RESISTOR		R1141	1-216-025-11	RES-CHIP 100 5% 1/10W			
986		DA	CHIP CONDUCTOR		R1142	1-216-295-91	SHORT 0			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
987		DA	NETWORK RESISTOR		RB1101	1-233-576-11	RES, CHIP NETWORK 100			
988		DA	NETWORK RESISTOR		RB1102	1-233-412-11	RES, CHIP NETWORK 1.0K			
989		DA	NETWORK RESISTOR		RB1103	1-233-412-11	RES, CHIP NETWORK 1.0K			
990		DA	NETWORK RESISTOR		RB1104	1-233-576-11	RES, CHIP NETWORK 100			
991		DA	NETWORK RESISTOR		RB1105	1-233-576-11	RES, CHIP NETWORK 100			
992		DA	NETWORK RESISTOR		RB1106	1-233-412-11	RES, CHIP NETWORK 1.0K			
993		H7	CAPACITOR		C1400	1-126-795-11	ELECT 10MF 20% 50V			
994		H7	CAPACITOR		C1401	1-126-786-11	ELECT 47MF 20% 16V			
995		H7	CAPACITOR		C1403	1-137-150-11	MYLAR 0.01MF 5% 50V			
996		H7	CAPACITOR		C1404	1-137-150-11	MYLAR 0.01MF 5% 50V			
997		H7	CAPACITOR		C1405	1-126-786-11	ELECT 47MF 20% 16V			
998		H7	CAPACITOR		C1407	1-126-786-11	ELECT 47MF 20% 16V			
999		H7	CAPACITOR		C1498	1-130-495-00	MYLAR 0.1MF 5% 50V			
1000		H7	CONNECTOR		CN1400	1-564-593-11	PLUG, CONNECTOR 14P			
1001		H7	CONNECTOR	*	CN1401	1-564-520-11	PLUG, CONNECTOR 5P			
1002		H7	DIODE		D1400	8-719-056-13	DIODE SML79423C-TP15 (POWER)			
1003		H7	DIODE		D1402	8-719-911-19	DIODE 1SS119-25			
1004		H7	DIODE		D1403	8-719-911-19	DIODE 1SS119-25			
1005		H7	FERRITE BEAD		FB1401	1-412-911-31	FERRITE 1.1uH			
1006		H7	FERRITE BEAD		FB1402	1-412-911-31	FERRITE 1.1uH			
1007		H7	FERRITE BEAD		FB1403	1-412-911-31	FERRITE 1.1uH			
1008		H7	TRANSISTOR		Q1400	8-729-029-66	TRANSISTOR DTC114ESA			
1009		H7	TRANSISTOR		Q1401	8-729-029-68	TRANSISTOR DTC114TSA			
1010		H7	TRANSISTOR		Q1402	8-729-029-40	TRANSISTOR DTA124ESA			
1011		H7	RESISTOR		R1400	1-215-405-00	METAL 220 1% 1/4W			
1012		H7	RESISTOR		R1401	1-215-405-00	METAL 220 1% 1/4W			
1013		H7	RESISTOR		R1402	1-215-397-00	METAL 100 1% 1/4W			
1014		H7	RESISTOR		R1403	1-215-397-00	METAL 100 1% 1/4W			
1015		H7	RESISTOR		R1404	1-215-413-00	METAL 470 1% 1/4W			
1016		H7	RESISTOR		R1406	1-249-407-11	CARBON 150 5% 1/4W			
1017		H7	RESISTOR		R1407	1-249-409-11	CARBON 220 5% 1/4W			
1018		H7	RESISTOR		R1408	1-249-413-11	CARBON 470 5% 1/4W			
1019		H7	RESISTOR		R1409	1-249-441-11	CARBON 100K 5% 1/4W			
1020		H7	RESISTOR		R1419	1-249-441-11	CARBON 100K 5% 1/4W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
1021		H7	RESISTOR		R1420	1-249-429-11	CARBON 10K 5% 1/4W			
1022		H7	RESISTOR		R1421	1-215-445-00	METAL 10K 1% 1/4W			
1023		H7	RESISTOR		R1422	1-249-433-11	CARBON 22K 5% 1/4W			
1024		H7	RESISTOR		R1423	1-249-433-11	CARBON 22K 5% 1/4W			
1025		H7	RESISTOR		R1424	1-215-453-00	METAL 22K 1% 1/4W			
1026		H7	SWITCH		S1400	1-762-196-21	SWITCH, TACT (+)			
1027		H7	SWITCH		S1401	1-762-196-21	SWITCH, TACT (-)			
1028		H7	SWITCH		S1402	1-762-196-21	SWITCH, TACT (BRT+)			
1029		H7	SWITCH		S1403	1-571-427-11	SWITCH, SLIDE (INPUT1/INPUT2)			
1030		H7	SWITCH		S1404	1-762-196-21	SWITCH, TACT (CONT-)			
1031		H7	SWITCH		S1405	1-762-196-21	SWITCH, TACT (OK)			
1032		H7	THERMISTOR		TH1400	1-807-796-11	THERMISTOR			
1033		L2	CAPACITOR		C1600	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
1034		L2	CAPACITOR		C1604	1-163-003-11	CERAMIC CHIP 330pF 10% 50V			
1035		L2	CAPACITOR		C1605	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1036		L2	CAPACITOR		C1606	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1037		L2	CAPACITOR		C1607	1-163-003-11	CERAMIC CHIP 330pF 10% 50V			
1038		L2	CAPACITOR		C1608	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
1039		L2	CAPACITOR		C1611	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1040		L2	CAPACITOR		C1613	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1041		L2	CAPACITOR		C1614	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1042		L2	CAPACITOR		C1617	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
1043		L2	CAPACITOR		C1618	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
1044		L2	CAPACITOR		C1619	1-163-038-91	CERAMIC CHIP 0.1MF 25V			
1045		L2	CAPACITOR		C1621	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
1046		L2	CAPACITOR		C1622	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
1047		L2	CAPACITOR		C1623	1-115-339-11	CERAMIC CHIP 0.1MF 10% 50V			
1048		L2	CAPACITOR		C1627	1-115-339-11	CERAMIC CHIP 0.1MF 10% 50V			
1049		L2	CAPACITOR		C1628	1-126-947-11	ELECT 47MF 20% 25V			
1050		L2	CAPACITOR		C1629	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1051		L2	CAPACITOR		C1632	1-126-947-11	ELECT 47MF 20% 25V			
1052		L2	CAPACITOR		C1633	1-126-791-11	ELECT 10MF 20% 16V			
1053		L2	CAPACITOR		C1637	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			
1054		L2	CAPACITOR		C1638	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
1055		L2	CAPACITOR		C1639	1-126-947-11	ELECT 47MF 20% 25V			
1056		L2	CAPACITOR		C1640	1-126-947-11	ELECT 47MF 20% 25V			
1057		L2	CONNECTOR		CN1600	1-564-505-11	PLUG, CONNECTOR 2P			
1058		L2	CONNECTOR	*	CN1601	1-564-507-11	PLUG, CONNECTOR 4P			
1059		L2	CONNECTOR	*	CN1602	1-564-511-11	PLUG, CONNECTOR 8P			
1060		L2	FERRITE BEAD		FB1600	1-412-911-11	FERRITE 1.1uH			
1061		L2	FERRITE BEAD		FB1601	1-412-911-11	FERRITE 1.1uH			
1062		L2	FERRITE BEAD		FB1602	1-412-911-11	FERRITE 1.1uH			
1063		L2	FERRITE BEAD		FB1603	1-412-911-11	FERRITE 1.1uH			
1064		L2	FERRITE BEAD		FB1604	1-412-911-11	FERRITE 1.1uH			
1065		L2	IC		IC1600	8-759-822-38	IC LA6510			
1066		L2	IC		IC1601	8-759-822-38	IC LA6510			
1067		L2	IC		IC1602	8-759-426-18	IC MB88141PF-ER			
1068		L2	IC		IC1603	8-759-803-42	IC LA6500-FA			
1069		L2	IC		IC1604	8-759-822-38	IC LA6510			
1070		L2	IC		IC1605	8-759-711-59	IC NJM78L05UA-TE1			
1071		L2	RESISTOR		R1600	1-216-073-91	RES-CHIP 10K 5% 1/10W			
1072		L2	RESISTOR		R1601	1-216-308-00	RES-CHIP 4.7 5% 1/10W			
1073		L2	RESISTOR		R1603	1-216-308-00	RES-CHIP 4.7 5% 1/10W			
1074		L2	RESISTOR		R1604	1-216-073-91	RES-CHIP 10K 5% 1/10W			
1075		L2	RESISTOR		R1605	1-215-859-00	METAL OXIDE 22 5% 1W			
1076		L2	RESISTOR		R1607	1-215-859-00	METAL OXIDE 22 5% 1W			
1077		L2	RESISTOR		R1608	1-216-071-00	RES-CHIP 8.2K 5% 1/10W			
1078		L2	RESISTOR		R1609	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1079		L2	RESISTOR		R1610	1-216-071-00	RES-CHIP 8.2K 5% 1/10W			
1080		L2	RESISTOR		R1611	1-215-859-00	METAL OXIDE 22 5% 1W			
1081		L2	RESISTOR		R1613	1-216-308-00	RES-CHIP 4.7 5% 1/10W			
1082		L2	RESISTOR		R1617	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1083		L2	RESISTOR		R1621	1-216-308-00	RES-CHIP 4.7 5% 1/10W			
1084		L2	RESISTOR		R1624	1-216-073-91	RES-CHIP 10K 5% 1/10W			
1085		L2	RESISTOR		R1625	1-216-073-91	RES-CHIP 10K 5% 1/10W			
1086		L2	RESISTOR		R1626	1-215-859-00	METAL OXIDE 22 5% 1W			
1087		L2	RESISTOR		R1628	1-216-073-91	RES-CHIP 10K 5% 1/10W			
1088		L2	RESISTOR		R1629	1-216-073-91	RES-CHIP 10K 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
1089		L2	RESISTOR		R1630	1-215-859-00	METAL OXIDE 22 5% 1W			
1090		L2	RESISTOR		R1631	1-216-073-91	RES-CHIP 10K 5% 1/10W			
1091		L2	RESISTOR		R1634	1-216-308-00	RES-CHIP 4.7 5% 1/10W			
1092		L2	RESISTOR		R1635	1-216-077-91	RES-CHIP 15K 5% 1/10W			
1093		L2	RESISTOR		R1636	1-215-859-00	METAL OXIDE 22 5% 1W			
1094		L2	RESISTOR		R1640	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1095		L2	RESISTOR		R1641	1-216-079-00	RES-CHIP 18K 5% 1/10W			
1096		L2	RESISTOR		R1643	1-216-308-00	RES-CHIP 4.7 5% 1/10W			
1097		L2	RESISTOR		R1644	1-216-053-00	RES-CHIP 1.5K 5% 1/10W			
1098		L2	RESISTOR		R1647	1-216-073-91	RES-CHIP 10K 5% 1/10W			
1099		L2	RESISTOR		R1648	1-216-073-91	RES-CHIP 10K 5% 1/10W			
1100		L2	RESISTOR		R1649	1-215-859-00	METAL OXIDE 22 5% 1W			
1101		L2	RESISTOR		R1650	1-249-382-11	CARBON 1.2 5% 1/4W			
1102		L2	RESISTOR		R1651	1-249-382-11	CARBON 1.2 5% 1/4W			
1103		L2	RESISTOR		R1652	1-249-382-11	CARBON 1.2 5% 1/4W			
1104		L2	RESISTOR		R1653	1-249-382-11	CARBON 1.2 5% 1/4W			
1105		L2	RESISTOR		R1654	1-216-025-11	RES-CHIP 100 5% 1/10W			
1106		L2	RESISTOR		R1655	1-216-025-11	RES-CHIP 100 5% 1/10W			
1107		N	CAPACITOR		C1001	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1108		N	CAPACITOR		C1002	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1109		N	CAPACITOR		C1004	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1110		N	CAPACITOR		C1005	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1111		N	CAPACITOR		C1014	1-126-205-11	ELECT CHIP 47MF 20% 6.3V			
1112		N	CAPACITOR		C1015	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1113		N	CAPACITOR		C1016	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1114		N	CAPACITOR		C1017	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1115		N	CAPACITOR		C1018	1-163-220-11	CERAMIC CHIP 3pF 0.25pF 50V			
1116		N	CAPACITOR		C1019	1-163-235-11	CERAMIC CHIP 22pF 5% 50V			
1117		N	CAPACITOR		C1020	1-126-206-11	ELECT CHIP 100MF 20% 6.3V			
1118		N	CAPACITOR		C1021	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1119		N	CAPACITOR		C1022	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1120		N	CAPACITOR		C1023	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1121		N	CAPACITOR		C1027	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1122		N	CAPACITOR		C1028	1-164-004-11	CERAMIC CHIP 0.1MF 10% 25V			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
1123		N	CAPACITOR		C1029	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1124		N	CAPACITOR		C1030	1-163-021-91	CERAMIC CHIP 0.01MF 10% 50V			
1125		N	CONNECTOR		CN1003	1-564-521-11	PLUG, CONNECTOR 6P			
1126		N	DIODE		D1001	8-719-404-50	DIODE MA111-TX			
1127		N	FERRITE BEAD		FB1001	1-543-963-22	FERRITE			
1128		N	CHIP CONDUCTOR		FB1005	1-216-295-91	SHORT 0			
1129		N	IC		IC1001	6-800-274-01	IC TMP91PW18F-2C37(Z)			
1130		N	IC		IC1002	8-759-420-77	IC PST574CMT-T1			
1131		N	IC		IC1003	8-759-641-86	IC BR24C16F-E2			
1132		N	TRANSISTOR		Q1001	8-729-029-06	TRANSISTOR DTC124EUA-T106			
1133		N	RESISTOR		R1001	1-216-125-00	RES-CHIP 1.5M 5% 1/10W			
1134		N	RESISTOR		R1003	1-216-025-11	RES-CHIP 100 5% 1/10W			
1135		N	RESISTOR		R1004	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1136		N	RESISTOR		R1005	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1137		N	RESISTOR		R1006	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1138		N	RESISTOR		R1008	1-216-025-11	RES-CHIP 100 5% 1/10W			
1139		N	RESISTOR		R1009	1-216-025-11	RES-CHIP 100 5% 1/10W			
1140		N	RESISTOR		R1010	1-216-049-11	RES-CHIP 1K 5% 1/10W			
1141		N	RESISTOR		R1011	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1142		N	RESISTOR		R1012	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1143		N	RESISTOR		R1014	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1144		N	RESISTOR		R1015	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1145		N	RESISTOR		R1016	1-216-025-11	RES-CHIP 100 5% 1/10W			
1146		N	RESISTOR		R1017	1-216-049-11	RES-CHIP 1K 5% 1/10W			
1147		N	RESISTOR		R1018	1-216-017-91	RES-CHIP 47 5% 1/10W			
1148		N	RESISTOR		R1019	1-216-017-91	RES-CHIP 47 5% 1/10W			
1149		N	RESISTOR		R1020	1-216-017-91	RES-CHIP 47 5% 1/10W			
1150		N	RESISTOR		R1021	1-216-017-91	RES-CHIP 47 5% 1/10W			
1151		N	RESISTOR		R1022	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1152		N	RESISTOR		R1023	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1153		N	RESISTOR		R1040	1-216-025-11	RES-CHIP 100 5% 1/10W			
1154		N	RESISTOR		R1041	1-216-065-91	RES-CHIP 4.7K 5% 1/10W			
1155		N	RESISTOR		R1042	1-216-073-91	RES-CHIP 10K 5% 1/10W			
1156		N	RESISTOR		R1043	1-216-121-11	RES-CHIP 1M 5% 1/10W			

No.	#	Board	Type	! / *	Ref. No.	Part No.	Description	Remarks-1	Remarks-2	Difference
1157		N	RESISTOR		R1044	1-216-121-11	RES-CHIP 1M 5% 1/10W			
1158		N	NETWORK RESISTOR		RB1001	1-233-576-11	RES, CHIP NETWORK 100			
1159		N	NETWORK RESISTOR		RB1002	1-233-576-11	RES, CHIP NETWORK 100			
1160		N	NETWORK RESISTOR		RB1003	1-233-576-11	RES, CHIP NETWORK 100			
1161		N	NETWORK RESISTOR		RB1004	1-233-576-11	RES, CHIP NETWORK 100			
1162		N	NETWORK RESISTOR		RB1005	1-233-576-11	RES, CHIP NETWORK 100			
1163		N	NETWORK RESISTOR		RB1006	1-233-576-11	RES, CHIP NETWORK 100			
1164		N	NETWORK RESISTOR		RB1007	1-233-576-11	RES, CHIP NETWORK 100			
1165		N	NETWORK RESISTOR		RB1009	1-233-576-11	RES, CHIP NETWORK 100			
1166		N	CRYSTAL		X1001	1-795-044-21	VIBRATOR, CRYSTAL (16.9344MHz)			