



Plasma TV Service Manual


Model Group: PLT-42TT

**MODEL:
PLT-42TT**

CONTENTS

1. IMPORTANT SAFETY PRECAUTIONS.....	1-2
2. SPECIFICATION.....	2-9
3. FACTORY & ELECTRONIC ADJUSTMENT.....	3-2
4. BLOCK DIAGRAM.....	4-5
5. TROUBLE SHOOTING GUIDES.....	5-6
6. P.C.BOARD TOP VIEW.....	6-8
7. ELECTRONIC MODULES LIST.....	7-1
8. SCHEMATIC DIAGRAM.....	8-21
9. EXPLODED VIEW.....	9-1
10.PACKAGING OF THE LIST.....	10-1

1. **Before returning an instrument to the customer**, always make a safety check of the entire instrument, including, but not limited to, the following items.
 - a. Be sure that no built-in protective devices are defective and/or have been defeated during servicing. (1) Protective shields are provided on this chassis to protect both the technician and the customer. Correctly replace all missing protective shields, including any removed for servicing convenience. (2) When reinstalling the chassis and/or other assembly in the cabinet, be sure to put back in place all protective devices, including, but not limited to, nonmetallic control knobs, insulating fish papers, adjustment and compartment covers/shields, and isolation resistor/capacitor networks. **Do not operate this instrument or permit it to be operated without all protective devices correctly installed and functioning.**
 - b. Be sure that there are no cabinet openings through which an adult or child might be able to insert their fingers and contact a hazardous voltage. Such openings include, but are not limited to, (1) spacing between the picture tube and the cabinet mask, (2) excessively wide cabinet ventilation slots, and (3) an improperly fitted and/or incorrectly secured cabinet back cover.
 - c. **Leakage Current Hot Check**—With the instrument completely reassembled, plug the AC line cord directly into a 120V AC outlet. (Do not use an isolation transformer during this test.) Use a leakage current tester or a metering system that complies with American National Standards Institutes (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 478. With the instrument AC switch first in the ON position and then in the OFF position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle bracket, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 3.5 milliamp. Reverse the instrument power cord plug in the outlet and repeat test. **ANY MEASUREMENTS NOT WITHIN THE LIMITS SPECIFIED HEREIN INDICATE A POTENTIAL SHOCK HAZARD THAT MUST BE ELIMINATED BEFORE RETURNING THE INSTRUMENT TO THE CUSTOMER.**

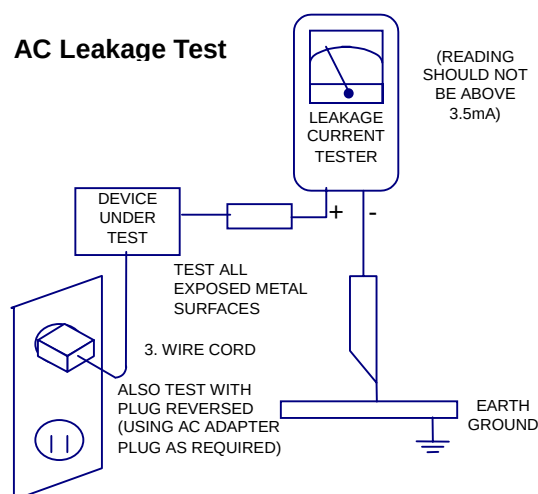

2. Read and comply with all caution and safety-related notes on or inside the Monitor cabinet, on the Projection Monitor chassis, or on the picture tube.
3. **Design Alteration Warning**—Do not alter or add to the mechanical or electrical design of this unit. Design alterations and additions, including, but not limited to, circuit modifications and the addition of the items such as auxiliary audio and/or video output connections might alter the safety characteristics of this Projection Monitor and create a hazard to the user. Any design alterations or additions will void the manufacturer's warranty and will make you, the service, responsible for personal injury or property damage resulting therefrom.

- 4. Hot Chassis Warning**—**a.** Some Monitor chassis are electrically connected directly to one conductor of the AC power cord and may be safely serviced without an isolation transformer only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC power source. To confirm that the AC power plug is inserted correctly, with an AC voltmeter measure between the chassis and a known earth ground. If a voltage reading in excess of 1.0V is obtained, remove and reinsert the AC power plug in opposite polarity and again measure the voltage potential between the chassis and a known earth ground.
b. Some Monitor chassis normally have 85V AC (RMS.), between chassis and earth ground regardless of the AC plug polarity. These chassis can be safely serviced only with an isolation transformer inserted in the power line between the receiver and the AC power source, for both personnel and test equipment protection.
c. Some Projection Monitor chassis have a secondary ground systems in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground system are electrically separated by insulating material that must not be defeated or altered.
- 5.** Observe original lead dress. Take extra care to assure correct lead dress in the following areas: **a.** near sharp edges, **b.** near thermally hot parts—be sure that leads and components do not touch thermally hot parts, **c.** the AC supply, **d.** high voltage, **e.** antenna wiring. Always inspect in all areas for pinched, out-of-place, or frayed wiring. Do not change spacing between components, and between components and the printed-circuit board. Check AC power cord for damage.
- 6.** Components, parts, and/or wiring that appear to have overheated or are otherwise damaged should be replaced with components, parts, or wiring that meet original specifications. Additionally, determine the cause of overheating and/or damage and, if necessary, take corrective action to remove any potential safety hazard.
- 7. PRODUCT SAFETY NOTICE**—Many Monitor electrical and mechanical parts have special safety-related characteristics some of which are often not evident from visual inspection, nor can the protection they give necessarily be obtained by replacing them with components rated for higher voltage, wattage, etc. Parts that have special safety characteristics are identified in this service data by shading with a  mark on schematics and by shading or a * mark in the parts list. Use of a substitute replacement part that does not have the same safety characteristics as the recommended replacement part in this service data parts list might create shock, fire, and/or other hazards.

1. SCOPE:
These specifications describe all the characteristics of the 42 inch color monitor.

2. ELECTRICAL REQUIREMENTS:

- | | |
|---------------------|--|
| 2.1. Display panel: | Specification |
| a. Screen size | Diagonal 42 inch |
| b. Aspect ratio | 16:9 wide |
| c. Number of pixels | 852(Horizontal, RGB Trio) X 480(Vertical)pixels |
| d. Pixel Pitch | 1.08mm X 1.08mm |
| e. Luminance | 570cd/m ² ,at APL13% |
| f. Chromatically | x=0.270±0.03, y=0.300±0.03(color temperature mode 1 :) at center block white pattern 100% (mosaic). |
-
- | | |
|----------------------|--|
| 2.2. Power Source: | |
| a. Input voltage | 100 ~ 240 Vac , 50 / 60 Hz |
| b. Input current | 3.3A |
| c. Inrush current | 60 A p-p/20ms Max. |
| d. Power consumption | 380±10% Watts (at 110Vac/color bar pattern) |
| e. Stand-by & DPMS | 5 Watts Max. (at 110Vac) |
-
- | | |
|--|--|
| 2.3. Input Signal: | |
| 2.3.1 Connector Type: | RCA Jack for audio, video Y/C _B /C _R and Y/P _B /P _R
6 pin Din S-terminal
9 pin D-SUB
15 pin D-SUB
24 pin DVI |
| 2.3.2 Video/S-Video Signal: | |
| a. Type | Analog |
| b. Polarity | Positive |
| c. Amplitude | Video 1Vp-p , (priority S-Video) Y=1Vp-p C=0.286Vp-p |
| d. Frequency | H: 15.734KHz V: 60Hz(NTSC)
H: 15.625KHz V: 50Hz(PAL) |
| e. Input impedance | 75 ohms |
| 2.3.3 Y/CB/CR or Y/PB/PR Signal: | |
| a. Type | Analog |
| b. Polarity | Positive |
| c. Amplitude | AV: 1Vp-p (with sync)
S-Video: Y: 1Vp-p ,C: 0.286Vp-p |
| d. Frequency | |
| Y/C _B /C _R | H: 15.734KHz ,V: 60Hz (NTSC) |
| Y/P _B /P _R :HDTV | H: 15.625KHz ,V: 50Hz (PAL)
1. 31KHz/60Hz (480P)
2. 45KHz/60Hz (720P)
33KHz/60Hz(1080I) |

2.3.4 RGB Signal:

a. Type	TTL
b. Polarity	Positive or Negative
c. Amplitude	RGB: 0.7Vp-p
d. Frequency	H: support to 31K~91KHz V: support to 50~85Hz

2.3.5 DVI Signal:

a. Type	Digital
b. Polarity	Positive or Negative
c. Frequency	H: support to 31K~63KHz V: support to 50~85Hz

2.3.6 Audio Signal: Analog 500mV rms /more than 22Kohm**2.3.7 Pin Assignments For D-SUB Connector (In / Loop Out):**

Pin	Signal Assignment	Pin	Signal Assignment	Pin	Signal Assignment
1	RED	6	RED GND	11	GND
2	GREEN	7	GREEN GND	12	SDA
3	BLUE	8	BLUE GND	13	H-SYNC
4	GND	9	NC	14	V-SYNC
5	GND	10	GND	15	SCL

2.3.8 Pin Assignments For 24 Pin DVI Connector(Digital Only):

Pin	Signal Assignment	Pin	Signal Assignment	Pin	Signal Assignment
1	TMDS Data 2-	9	TMDS Data 1-	17	TMDS Data 0-
2	TMDS Data 2+	10	TMDS Data 1+	18	TMDS Data 0+
3	TMDS Data 2/4 Shield	11	TMDS Data 1/3 Shield	19	TMDS Data 0/5 Shield
4	TMDS Data 4-	12	TMDS Data 3-	20	TMDS Data 5-
5	TMDS Data 4+	13	TMDS Data 3+	21	TMDS Data 5+
6	DDC Clock	14	+5V Power	22	TMDS Clock Shield
7	DDC Data	15	Ground (For +5V)	23	TMDS Clock +
8	No Connect	16	Hot Plug Detect	24	TMDS Clock -

2.3.9 RGB/DVI For VESA Standard:

Mode No	Resolution	Refresh Rate	Horizontal Frequency	Vertical Frequency	Vertical Sync Polarity	Horizontal Sync Polarity	Dot rate
		(Hz)	(K Hz)	(Hz)	(TTL)	(TTL)	(MHz)
1	640(VGA)x 480	60	31.5	59.94	-	-	25.175
2	640(VGA)x 480	72	37.9	72.81	-	-	31.500
3	640(VGA)x 480	75	37.5	75	-	-	31.500
4	640(VGA)x 480	85	43.3	85.01	-	-	36.000
5	800(SVGA)x 600	56	35.1	56.25	+	+	36.000
6	800(SVGA)x 600	60	37.9	60.317	+	+	40.000
7	800(SVGA)x 600	72	48.1	72.19	+	+	50.000
8	800(SVGA)x 600	75	46.9	75	+	+	49.500
9	800(SVGA)x 600	85	53.7	85.06	+	+	56.250
10	1024(XGA)x 768	60	48.4	60.01	-	-	65.000
11	1024(XGA)x 768	70	56.5	70.07	-	-	75.000
12	1024(XGA)x 768	75	60.0	75.03	+	+	78.750
13	1024(XGA)x 768	85	68.7	84.99	+	+	94.500
14	1280(SXGA)x 1024	60	63.98	60.02	+	+	108.00
15◎	1280(SXGA)x 1024	75	79.98	75.03	+	+	135.00
16◎	1280(SXGA)x 1024	85	91.15	85.02	+	+	157.50
18	640(VGA)x 350	70	31.50	70	-	-	25.175
19	640(VGA)x 480	50	31.5	50	-	-	25.175
20◎	1280(HDTV)x 720P	60	45.15	60	-	-	74.250
21◎	1920(HDTV)x 1080I	60(I)	33.78	60	-	-	74.250
22	720(DOS)x 400	70	31.46	70.08	+	-	28.320
23	852(WGA)x 480	60	31.72	60.41	-	-	34.00

RGB/DVI For Apple Standard.

Mode No	Resolution	Refresh Rate	Horizontal Frequency	Vertical Frequency	Vertical Sync Polarity	Horizontal Sync Polarity	Dot rate
		(Hz)	(K Hz)	(Hz)	(TTL)	(TTL)	(MHz)
24	640x 870	75	68.85	75.00	-	-	57.283
25	832 x 624	75	49.73	74.55	-	-	57.283
26	1152 x 870	75	68.68	75.06	-	-	100.000

Attention ◎: For DVI is not supported.

2.3.10 Y/PB/PR For Component:

Mode No	Resolution	Refresh Rate
1	640 x 480P	60
2	1920 x 1080I	60
3	1280 x 720P	60

2.4. Display Performance Requirements:

The data of display performance are measured based on the following.
Conditions unless otherwise specified.

- | | |
|-------------------------|---|
| a. Ambient temperature | 25±5 °C |
| b. Warm up period | 30 minutes Min. |
| c. Line input voltage : | 100 Vac ~ 240 Vac (50 / 60 Hz) |
| d. Viewing distance | Distance from screen is 81 cm |
| e. Display mode | Test with window white pattern mode if not specified. |
| f. Brightness condition | Press recall bottom to set default brightness |

2.4.1 Maximum Resolution: Support to 1280 x 1024

2.4.2 Horizontal Size (Standard) 920±8 mm (for mode 1~26)
Vertical Size (Standard) 518±8 mm (for mode 1~26)

2.4.3 Horizontal Size (Max.) Mode 1~26⇒ full-scan
Vertical Size (Max.) Mode 1~26⇒ full-scan

2.4.4 Maximum Brightness Level: Timing Mode 1
a. 100% center block white pattern(mosaic) More than 30FL
(while pressing recall button to set default brightness)
b. raster background with contrast / brightness at Max. and black signal)
less than 0.4FL

2.5. Operation:

Main unit button

Main power switch (power ON /OFF)
Power ON/OFF
Input Mode (Video1 -> S-Video1 -> Video2 or S-Video2 ->
Y/P_B/P_R 1 or Y/C_B/C_R 1 -> Y/P_B/P_R 1 or Y/C_B/C_R 1 -> RGB ->
DVI->Video1 run in circle)
Menu key -,+ Adjustment -,+
Power on/off
Input Mode (same as Main unit button)
Volume -,+ Wide , Video/S video
input:4:3/16:9/ZOOM1/ZOOM2
Analog RGB input :W4:3/W16:9
Menu -,+ Adjustment -,+ RECALL
PIP ,POP ,SWAP ,MUTE

IR Remote Control

2.5.1 Adjustable Items:

AV/S-video input Brightness, Contrast, Color , Tint, Sharpness
Y/CB/CR Color Temperature

Analog RGB input Display position :
Brightness, Contrast, Vertical position, Vertical width,
Horizontal position, Horizontal width, Color Temperature
Clock phase, DPMS.

DVI input
Brightness, Contrast, Vertical position, Vertical width,
Horizontal position, Horizontal width, Color Temperature,
DPMS

3. DIMENSIONS: Without/Stand With/Stand

	Width	1040mm	1040mm
	Height	648 mm	690mm
	Depth	95mm	375 mm
3.1.	Package Dimensions:		
	Width	1230 mm	
	Height	960 mm	
	Depth	470 mm	
3.2.	Weight:		
	Net weight	79.4lbs/36 Kgs (w/o stand) 83.8lbs/ 38Kgs (w/ stand)	
	Gross weight	115lbs/52 Kgs	
4.	ENVIRONMENT:		
4.1.	Operating:		
	Temperature	0~40°C (32~104°F)	
	Relative humidity	20~80%	
	Pressure	800~1114hpa	
4.2.	Non-Operating:		
	Temperature	-20~60°C	
	Relative humidity	20~90%	
	Pressure	700~1114hpa	
	Vibration	X/Y/Z, 0.5G/10~55Hz(sweep), 10 minutes	
4.3.	Acoustics:		
	(IHF A-weighted 1meter)	40dB Max.	
5.	SOUND:		
	a. Residual hum (at volume min)	500 μ W Max.	
	b. Practical max. Audio output (at 10% THD max.)		
	1.0vp-p 1K Hz input	5W +5W Max. /12 ohm	
	c. Sound distortion (at 250 mw 1K Hz)	1% Max.	
	d. Sound distortion (at	(at	
	i.ovp-p 1kHz input volume max)	9% max	
	e. Audio output (input at 1.4V _{p.p})	≥ 1.0 V _{p.p}	
	f. Max. hum (at volume max)	1000 μ W Max.	
	g. Sensitivity (at volume max. O/P 1W)	150mV $\pm$ 3dB	
	at 1KHz AV Input		
	h. Audio Fidelity (1KHz 0dB,corrected for emphasis characteristics)		
	BBE ON	60Hz	6dB $\pm$ 3dB
		10KHz	8dB $\pm$ 3dB
	WOOFER & BBE OFF	100Hz	-6dB $\pm$ 3dB
		10KHz	-2dB $\pm$ 3dB
6.	RF		

- 6.1 RF Sensitivity (Peak)
- | | | |
|------|------------------|-----------|
| VHF | CH 2 ~ CH 13 | 30dB Max. |
| UHF | CH 14 ~ CH 69 | 30dB Max. |
| CATV | CH A-5 ~ CH W+29 | 30dB Max. |
- 6.2 AFT Pull-In Range
- | | | |
|------|------------------|--------------------------|
| VHF | CH 2 ~ CH 13 | $\pm 0.6\text{MHz}$ Min. |
| UHF | CH 14 ~ CH 69 | $\pm 0.6\text{MHz}$ Min. |
| CATV | CH A-5 ~ CH W+29 | $\pm 0.6\text{MHz}$ Min. |
- 6.3 Picture IF Rejection
- | | | |
|------|------------------|-----------|
| VHF | CH 2 ~ CH 13 | 50dB Min. |
| UHF | CH 14 ~ CH 69 | 50dB Min. |
| CATV | CH A-5 ~ CH W+29 | 50dB Min. |
- 6.4 Picture Image Rejection
- | | | |
|------|------------------|-----------|
| VHF | CH 2 ~ CH 13 | 40dB Min. |
| UHF | CH 14 ~ CH 69 | 35dB Min. |
| CATV | CH A-5 ~ CH W+29 | 35dB Min. |
- 6.5 AGC Characteristics
- | | |
|---------------------|-----------|
| AGC Figure Of Merit | 50dB Min. |
|---------------------|-----------|
- RF signal range in which video at PDP drops 6 dB from output level obtained with 100mV input.
- 6.6 RF AGC Cut In Level 55dB $\pm$ 2dB
- 6.7 FM/AM Rejection (100mV at SIF input) 14dB min
- 6.8 Noise Limits Sensitivity
- | | |
|-----|----------|
| VHF | 45dB max |
| UHF | 49dB max |
7. RELIABILITY REQUIREMENT:
The MTBF needs 20000hrs under operation $25\pm 5^{\circ}\text{C}$ (half luminosity, motion picture)
8. REGULATORY REQUIREMENTS:
- 8.1 Safety Requirement:
- | | |
|--------|--|
| a. UL | Safety of information technology equipment including electrical business equipment |
| b. CSA | Safety of information technology equipment including electrical business equipment |
| c. TUV | |
- 8.2 Emission Requirement:
The unit shall meet the EMI limits in all screen modes. For EMI testing, the unit must be failed with the screen pattern consisting of scrolling capital "H" characters also the brightness contrast will be adjusted to max. Level.
- a. FCC class A part 15
- 8.3 Transit test

- a. Drop Test 200mm max.
- b. Vibration Test
 - 1. Forward and backward 30 minutes 1000 c.p.m
 - 2. Right and left 30 minutes 1000 c.p.m
 - 3. Up and down 30 minutes 1000 c.p.m

8.4 Power Management:

Mode	H-sync	V-sync	Video	Power dissipation
Normal	Pulse	Pulse	Active	Normal power
Stand-by	No pulse	No pulse	No video	Power off
Power saving	Pulse	No pulse	Blanked	Less than 5 watts
	No pulse	Pulse		

This Plasma display is Energy star compliant when used with a computer equipped with DPMS.


Note: The power indicator LED color is green in normal state, yellow in stand-by and power saving state.

9. VIDEO & AUDIO

- 9.1 Video Signal Output (impedance 75 ohm) 1.0 Vp-p $\pm$ 0.2Vp-p
(input signal at 1.0 Vp-p $\pm$ 0.2Vp-p)

APPENDIX A :

Preset Timing Chart

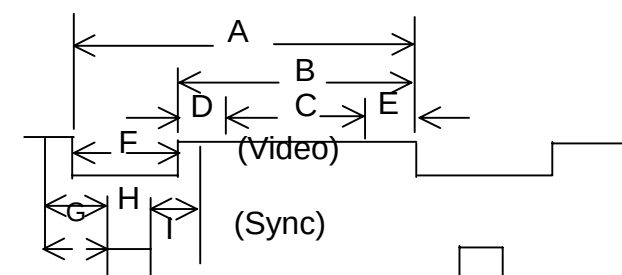

Item	Description:
A	Total time
B	Active display area including borders
C	Active display area excluding borders
D	Left/Top border
E	Right/bottom border
F	Blanking time
G	Front porch
H	Sync-width
I	Back porch

Mode No	1	2	3	4	5	6	7	8	9	
Resolution	640	640	640	640	800	800	800	800	800	
&	480	480	480	480	600	600	600	600	600	
Refresh Rate	60	72	75	85	56	60	72	75	85	Hz
Pixel	25.175	31.5	31.5	36	36	40	50	49.5	56.25	MHz
Horizontal visible	640	640	640	640	800	800	800	800	800	Dots
Horizontal total	800	832	840	832	1024	1056	1040	1056	1048	Dots
Horizontal front porch	24	32	16	56	24	40	56	16	32	Dots
Horizontal sync	96	40	64	56	72	128	120	80	64	Dots
Horizontal back porch	40	120	120	80	128	88	64	160	152	Dots
Horiz blanking time	160	192	200	192	224	256	240	256	248	Dots
Vertical visible	480	480	480	480	600	600	600	600	600	Lines
Vertical total	525	520	500	509	625	628	666	625	631	Lines
Vertical front porch	18	17	1	1	1	1	37	1	1	Lines
Vertical sync	2	3	3	3	2	4	6	3	3	Lines
Vertical back porch	25	20	16	25	22	23	23	21	27	Lines
Vertical blanking time	45	40	20	29	25	28	66	25	31	Lines
Horizontal frequency	31.469	37.9	37.5	43.3	35.1	37.9	48.1	46.9	53.7	KHz
Vertical frequency	59.94	72.81	75	85.01	56.25	60.317	72.19	75	85.06	Hz
Vertical sync polarity	-	-	-	-	+	+	+	+	+	TTL
Horiz sync polarity	-	-	-	-	+	+	+	+	+	TTL
Dot rate	25.175	31.5	31.5	36	36	40	50	49.5	56.25	MHz


Mode No	10	11	12	13	14	15	16	18	19	
Resolution	1024	1024	1024	1024	1280	1280	1280	640	640	
&	768	768	768	768	1024	1024	1024	350	480	
Refresh Rate	60	70	75	85	60	75	85	70	50	Hz
Pixel	65	75	78.75	94.5	108	135	157.5	25.175	25.175	MHz
Horizontal visible	1024	1024	1024	1024	1280	1280	1280	640	640	Dots
Horizontal total	1344	1328	1312	1376	1688	1688	1728	800	800	Dots
Horizontal front porch	24	24	16	48	48	16	64	16	16	Dots
Horizontal sync	136	136	96	96	112	144	160	96	96	Dots
Horizontal back porch	160	144	176	208	248	248	224	48	48	Dots
Horiz blanking time	320	304	288	352	408	408	448	160	160	Dots
Vertical visible	768	768	768	768	1024	1024	1024	350	480	Lines
Vertical total	806	806	800	808	1066	1066	1072	449	629	Lines
Vertical front porch	3	3	1	1	1	1	1	37	62	Lines
Vertical sync	6	6	3	3	3	3	3	2	2	Lines
Vertical back porch	29	29	28	36	38	38	44	60	85	Lines
Vertical blanking time	38	38	32	40	42	42	48	99	149	Lines
Horizontal frequency	48.4	56.5	60	68.7	63.98	79.98	91.15	31.50	31.5	KHz
Vertical frequency	60.01	70.07	75.03	84.99	60.02	75.03	85.02	70	50	Hz
Vertical sync polarity	-	-	+	+	+	+	+	-	-	TTL
Horiz sync polarity	-	-	+	+	+	+	+	-	-	TTL
Dot rate	65	75	78.75	94.5	108	135	157.5	25.175	25.175	MHz

Mode No	20	21	22	23	24	25	26			
Resolution	1280	1920	720	852	640	832	1152			
&	720P	1080I	400	480	870	624	870			
Refresh Rate	60	60I	70	60	75	75	75			Hz
Pixel	74.250	74.25	28.320	30	57.283	57.283	100.000			MHz
Horizontal visible	1266	1920	720	852	640	832	1152			Dots
Horizontal total	1650	2200	900	955	832	1152	1456			Dots
Horizontal front porch	42	64	18	19	32	32	32			Dots
Horizontal sync	63	44	108	48	80	64	128			Dots
Horizontal back porch	279	162	54	36	80	224	144			Dots
Horiz blanking time	384	300	180	103	192	320	304			Dots
Vertical visible	687	540	400	480	870	624	870			Lines
Vertical total	750	562.5	449	525	918	667	915			Lines
Vertical front porch	1	24.5	12	10	3	1	3			Lines
Vertical sync	6	6	2	2	3	3	3			Lines
Vertical back porch	56	18	35	33	42	39	39			Lines
Vertical blanking time	63	44.5	49	45	48	43	45			Lines
Horizontal frequency	45.15	33.75	31.46	31.72	68.85	49.73	68.68			KHz
Vertical frequency	60	60	70.08	60.41	75.00	74.55	75.06			Hz
Vertical sync polarity	-	-	+	-	-	-	-			TTL
Horiz sync polarity	-	-	-	-	-	-	-			TTL
Dot rate	74.25	74.25	28.32	30	57.283	57.283	100.000			MHz

1. PANEAL voltage adjustment

The power voltage should be adjusted and checked when changing the panel or power board.

POWER VOLTAGE ADJUST FOR SAMSUNG TTL PANEL

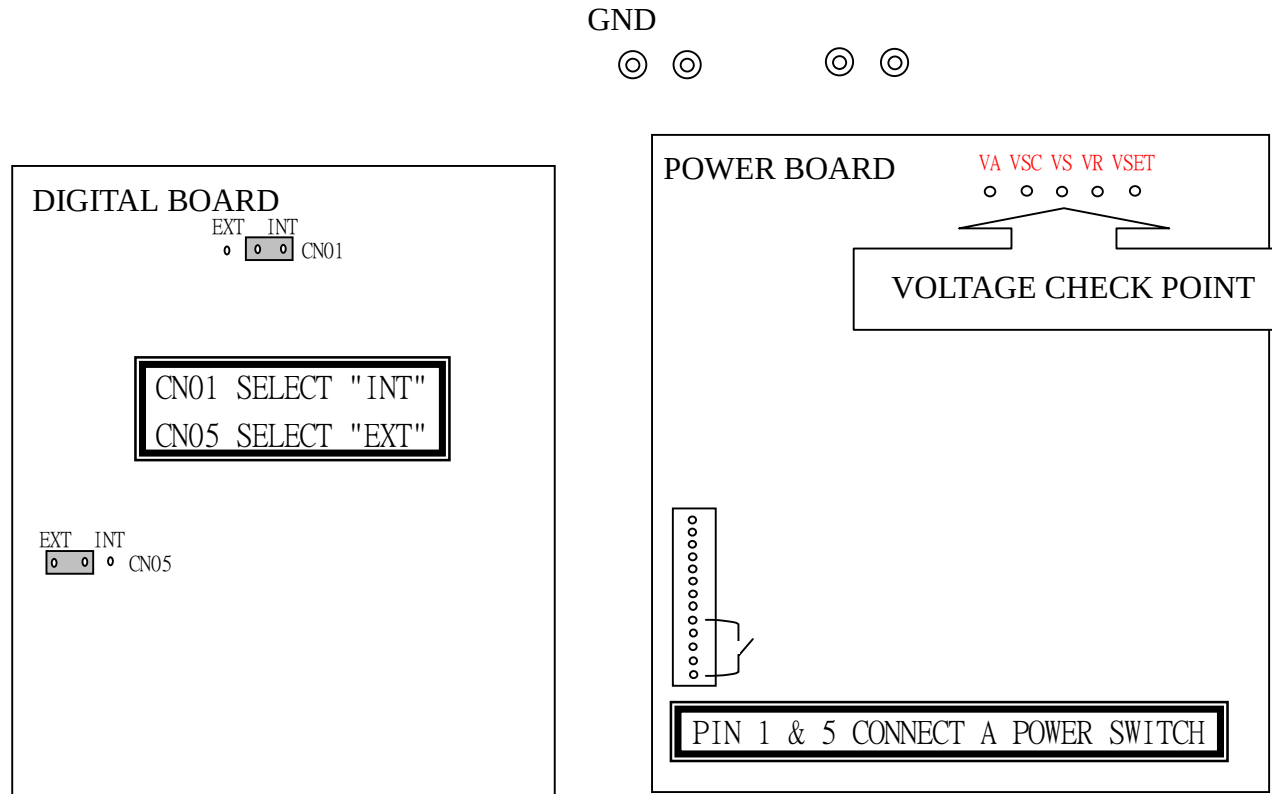

1. DIGITAL BOARD CON01 SELECT TO "INT".
2. DIGITAL BOARD CON05 SELECT TO "EXT".
3. MAKE A SW CONEECT TO POWER BOARD CON80011 PIN 1 & PIN5 FOR POWER SWITCH.
4. FOLLOW THE PANEL LABEL VOLTAGE ADJUST VR.
5. VOLTAGE CHECK FROM "CHECK POINT" WITH GRAND.
6. ADJUST SEQUENCE

1th	→	2th	→	3th	→	4 th	→	5 th
VA		VSC		VS		VR		VSET
VR8005		VR8006		VR8003		VR8001		VR8007

2. Color temperature adjustment

Push the factory service key to into the adjustment mode. The picture will appear as follow

DVI	5400°k
X=335	Y=343
GAIN	Bias
RGB	RGB
XXX	XXX

Use the AV key to select the color to adjust and ◀ or ▶ key to adjust the level.

The required equipments are CA-100,Vp300.

- Adjust Bias first to let the Y be 0.4 on CA-100. Adjust R or B to let the value of X,Y on CA-100 be the same as the value showing screen, The value of Y should be Maintained 0.4 during the adjusting.
- Move the cursor to adjust Gain. The value of Y should be adjusted to 25. Then adjust R or B to let the value of X,Y on CA-100 be the same as the value showing on screen. The value of Y should be maintain 25 during the adjustment.
- Repeat to check the Bias and Gain. The value of Y,X and Y should be the same as the previous adjusted value. Then the DVI 5400°k mode is adjusted completely.
- Push the factory service key again to next picture. Then repeat the steps a. b. c. to adjust.
- If the adjustment is completed, repeat d. a. b. and c steps to adjust again.
- When the last mode AV 13000°k is adjusted completely, push the factory service key again to leave the adjustment mode,

Note: 1. There are 12 adjusted modes(DVIx4.RGBx4 AVx4)

2. The adjusted sequence is DVI®RGB®AV.

3. DVI/RGB : Bias Y=0.4

Gain Y=25

AV : Bias Y=1

Gain Y=25

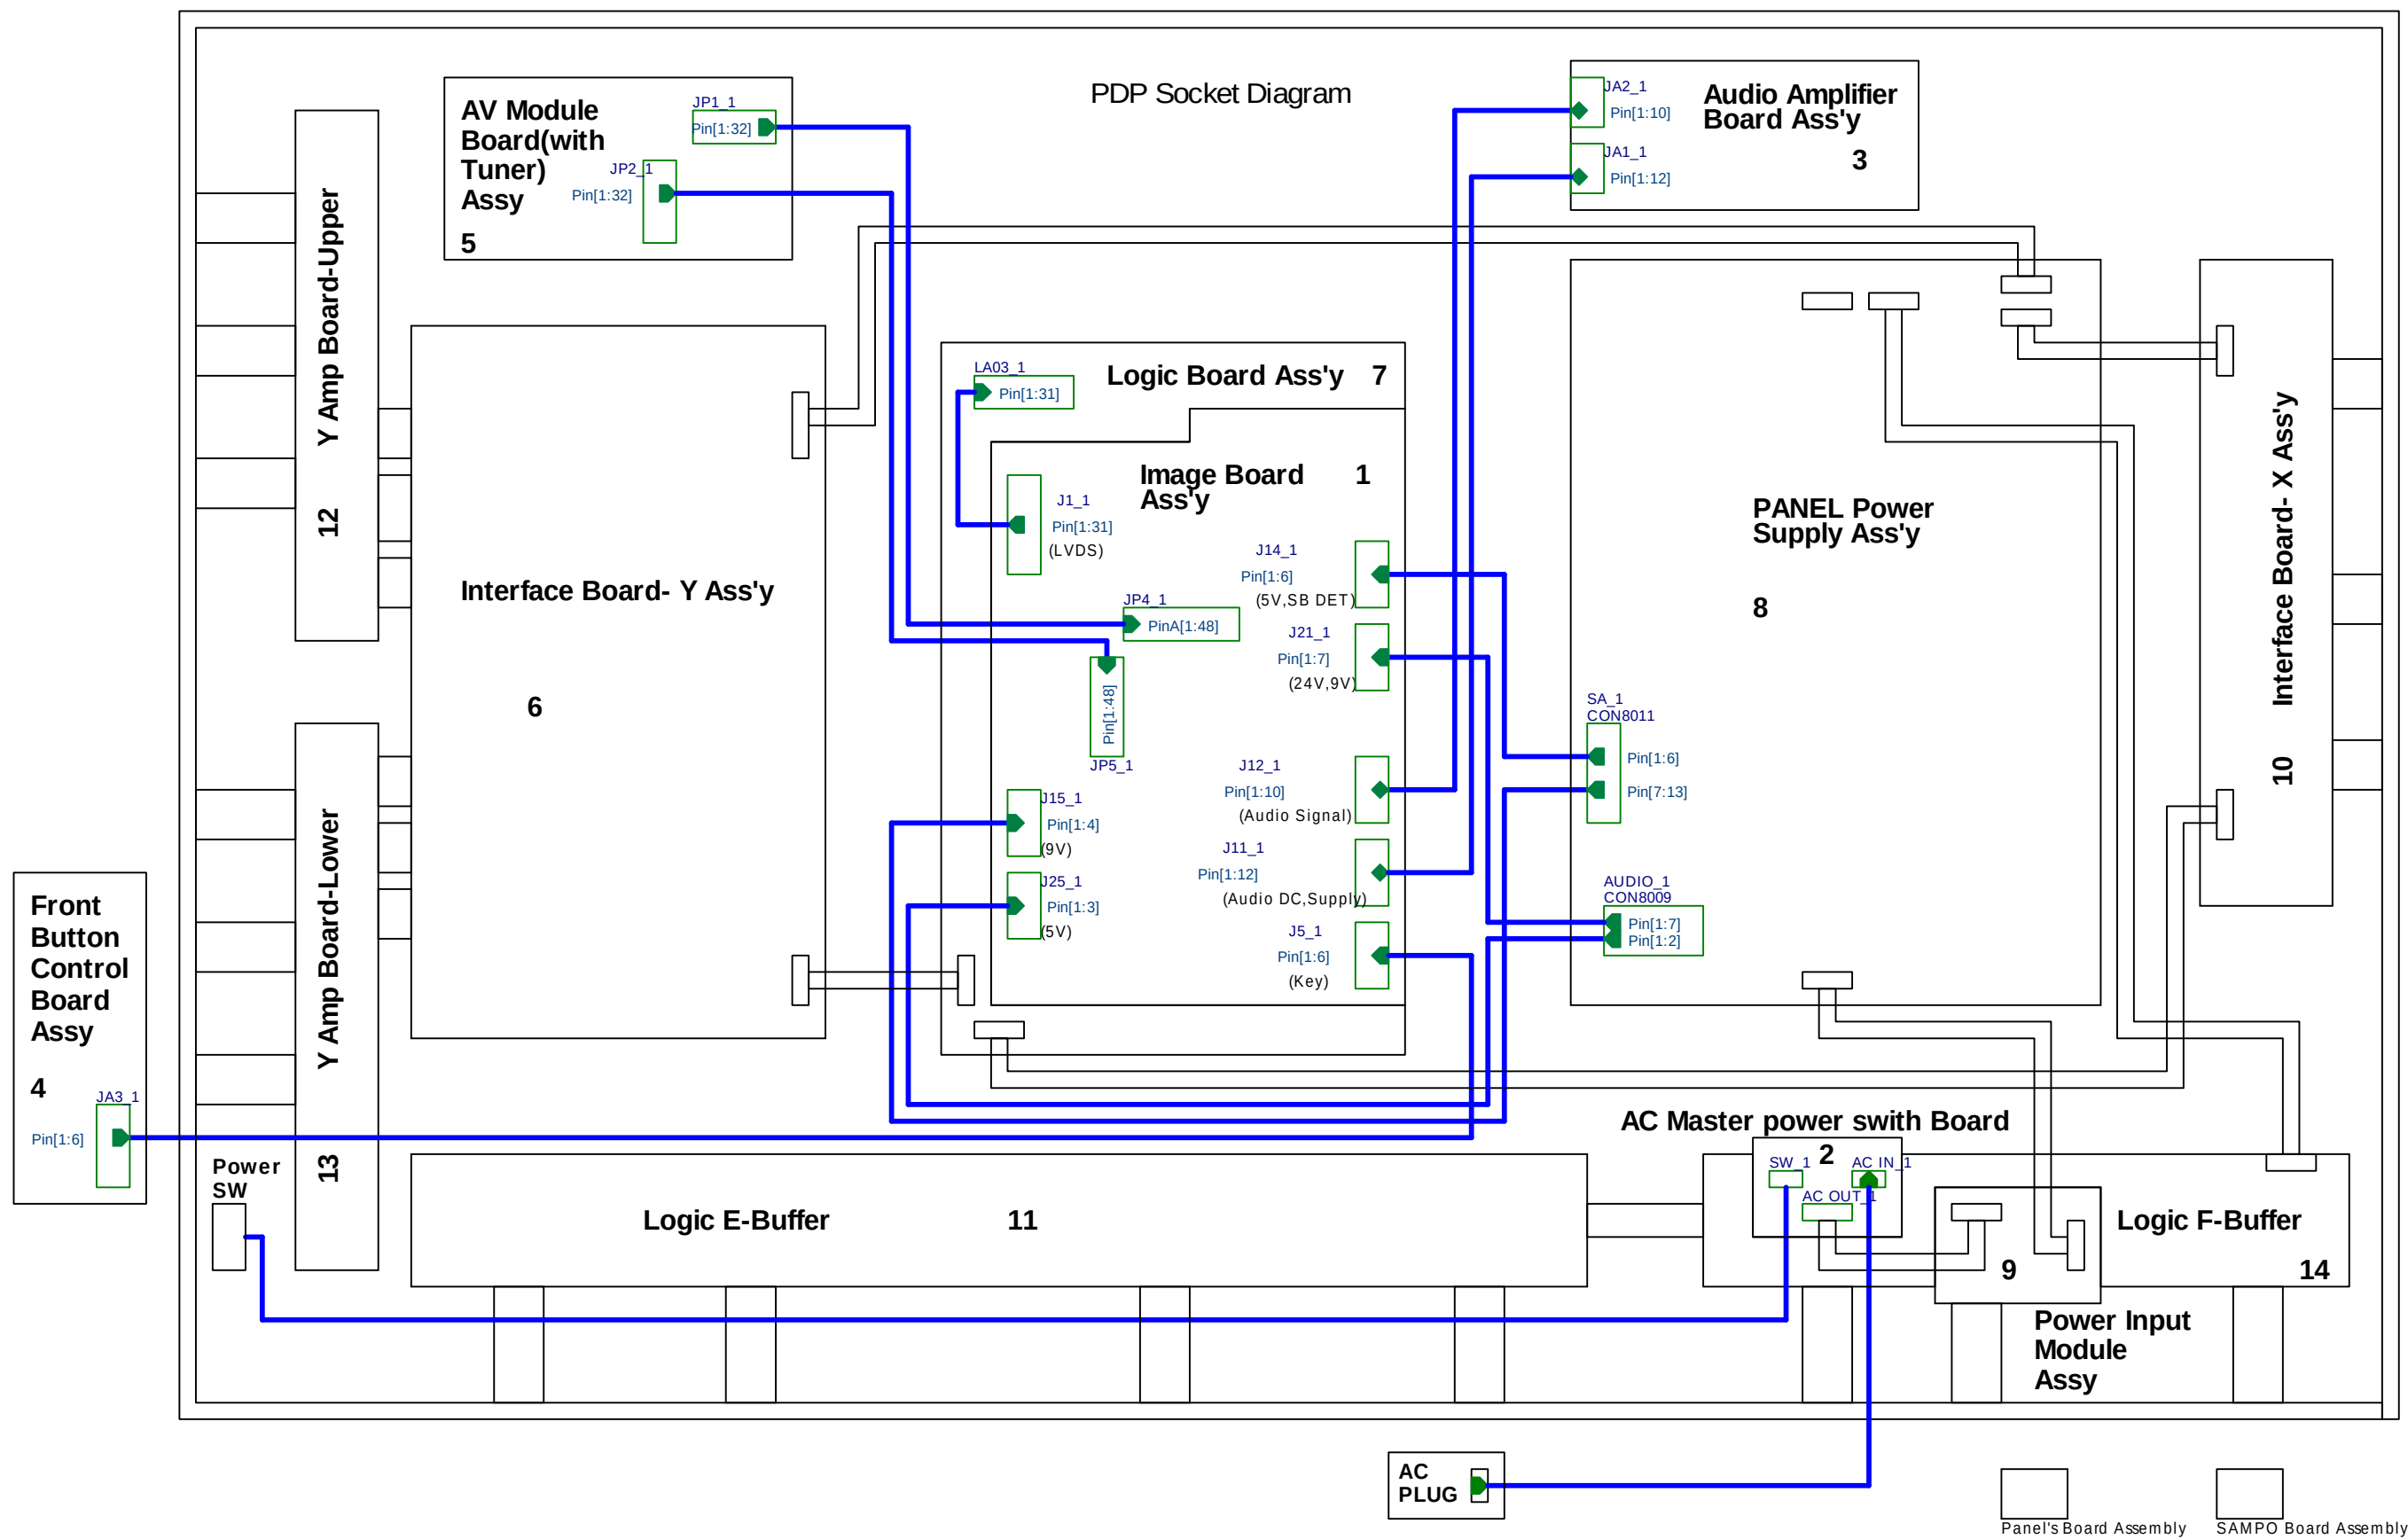


Image Board Socket Data

Image Board ↔ Panel					
Image Board Ass'y					
	J1 (40 Pin)	J14 (6 Pin)	J15 (4 Pin)	J21 (7 Pin)	J25 (3 Pin)
Pin 1	GND	+5VSB	VGND	+9VT	+5VA
Pin 2	NC	DGND	VGND	NC	VGND
Pin 3	RA-	DGND	NC	DGND	VGND
Pin 4	RA+	5V1	+9V	+24V	
Pin 5	GND	SB		+24V	
Pin 6	GND	DGND		GND	
Pin 7	RB-			GND	
Pin 8	RB+				
Pin 9	GND				
Pin 10	GND				
Pin 11	RC-				
Pin 12	RC+				
Pin 13	GND				
Pin 14	GND				
Pin 15	RCLK-				
Pin 16	RCLK+				
Pin 17	GND				
Pin 18	GND				
Pin 19	RD-				
Pin 20	RD+				
Pin 21	GND				
Pin 22	GND				
Pin 23	GND				
Pin 24	GND				
Pin 25	NC				
Pin 26	GND				
Pin 27	NC				
Pin 28	GND				
Pin 29	NC				
Pin 30	GND				
Pin 31	NC				
Pin 32	NC				
Pin 33	NC				
Pin 34	NC				
Pin 35	NC				
Pin 36	NC				
Pin 37	NC				
Pin 38	NC				
Pin 39	NC				
Pin 40	NC				

Image Board ↔ AV Module Board		
Image Board	AV Module Board	Content
JP5 (48 Pin)	JP2 (48 Pin)	
A1	A16	+9VT
A2	A15	DGND
A3	A14	NC
A4	A13	DGND
A5	A12	SCL2
A6	A11	DGND
A7	A10	SDA2
A8	A9	DGND
A9	A8	NC
A10	A7	DGND
A11	A6	TV_R
A12	A5	DGND
A13	A4	TV_L
A14	A3	DGND
A15	A2	AFT_TUN
A16	A1	TUN_DETn
B1	B16	DVI_L
B2	B15	DVI_R
B3	B14	AGND
B4	B13	L_OUT
B5	B12	R_OUT
B6	B11	SUB_WFR
B7	B10	PWR_CTL
B8	B9	AGND
B9	B8	AGND
B10	B7	AGND
B11	B6	AGND
B12	B5	AGND
B13	B4	AGND
B14	B3	D_CTL
B15	B2	RESETQ
B16	B1	SD
C1	C1	AS_MP
C2	C2	AS_SP
C3	C3	RST_DPTV
C4	C4	SV2_SW
C5	C5	V2B_DETn
C6	C6	YUVn_RGB
C7	C7	15Kn_MP
C8	C8	15Kn_SP
C9	C9	SB5V
C10	C10	TDO
C11	C11	TDI
C12	C12	NC
C13	C13	NC
C14	C14	TMS
C15	C15	DGND
C16	C16	TCK

Image Board ↔ AV Module Board		
Image Board	AV Module Board	Content
JP5 (48 Pin)	JP2 (48 Pin)	
A1	A16	COMPOSITE
A2	A15	VGND
A3	A14	S2_Y
A4	A13	S2_C
A5	A12	VGND
A6	A11	Y1
A7	A10	PB1_CB1
A8	A9	PR1_CR1
A9	A8	VGND
A10	A7	Y2
A11	A6	PB2_CB2
A12	A5	PR2_CR2
A13	A4	VGND
A14	A3	AVB_DETn
A15	A2	TV
A16	A1	VGND
B1	B16	AV1_L
B2	B15	AV1_R
B3	B14	AGND
B4	B13	S2_L
B5	B12	S2_R
B6	B11	AGND
B7	B10	YUV1_L
B8	B9	YUV1_R
B9	B8	AGND
B10	B7	YUV2_L
B11	B6	YUV2_R
B12	B5	AGND
B13	B4	RGB_L
B14	B3	RGB_R
B15	B2	AGND
B16	B1	AGND
C1	C1	PCn_MPU
C2	C2	PCSCS
C3	C3	PCSI
C4	C4	PCCLK
C5	C5	SSO
C6	C6	DGND
C7	C7	P5V
C8	C8	SCL2
C9	C9	SDA2
C10	C10	DGND
C11	C11	SCL_SP
C12	C12	SDA_SP
C13	C13	DGND
C14	C14	SCL2_33
C15	C15	SDA2_33
C16	C16	DGND

Image Board ↔ Audio Amplifier Board		
Image Board	Audio Amplifier Board	Content
J11 (12 Pin)	JA1 (12 Pin)	
Pin 1	Pin 1	24V
Pin 2	Pin 2	24V
Pin 3	Pin 3	DGND
Pin 4	Pin 4	SB5V
Pin 5	Pin 5	DGND
Pin 6	Pin 6	AO_SEL
Pin 7	Pin 7	SDA2
Pin 8	Pin 8	SCL2
Pin 9	Pin 9	A_MUTEn
Pin 10	Pin 10	SURR1
Pin 11	Pin 11	SURR2
Pin 12	Pin 12	DGND

Image Board ↔ Audio Amplifier Board		
Image Board	Audio Amplifier Board	Content
J12 (10 Pin)	JA2 (10 Pin)	
Pin 1	Pin 1	L_IN
Pin 2	Pin 2	R_IN
Pin 3	Pin 3	AGND
Pin 4	Pin 4	L_OUT
Pin 5	Pin 5	R_OUT
Pin 6	Pin 6	AGND
Pin 7	Pin 7	SUB_WFR
Pin 8	Pin 8	SPK_CTL
Pin 9	Pin 9	PWR_CTL
Pin 10	Pin 10	NC

Image Board ↔ Front Button Control Board		
Image Board	Front Button Control Board	Content
J5 (6 Pin)	JA3 (6 Pin)	
Pin 1	Pin 1	RC_OUT
Pin 2	Pin 2	SW_OUT
Pin 3	Pin 3	ON_LED
Pin 4	Pin 4	SB_LED
Pin 5	Pin 5	DGND
Pin 6	Pin 6	SB5V

Image Board Signal Block Diagram



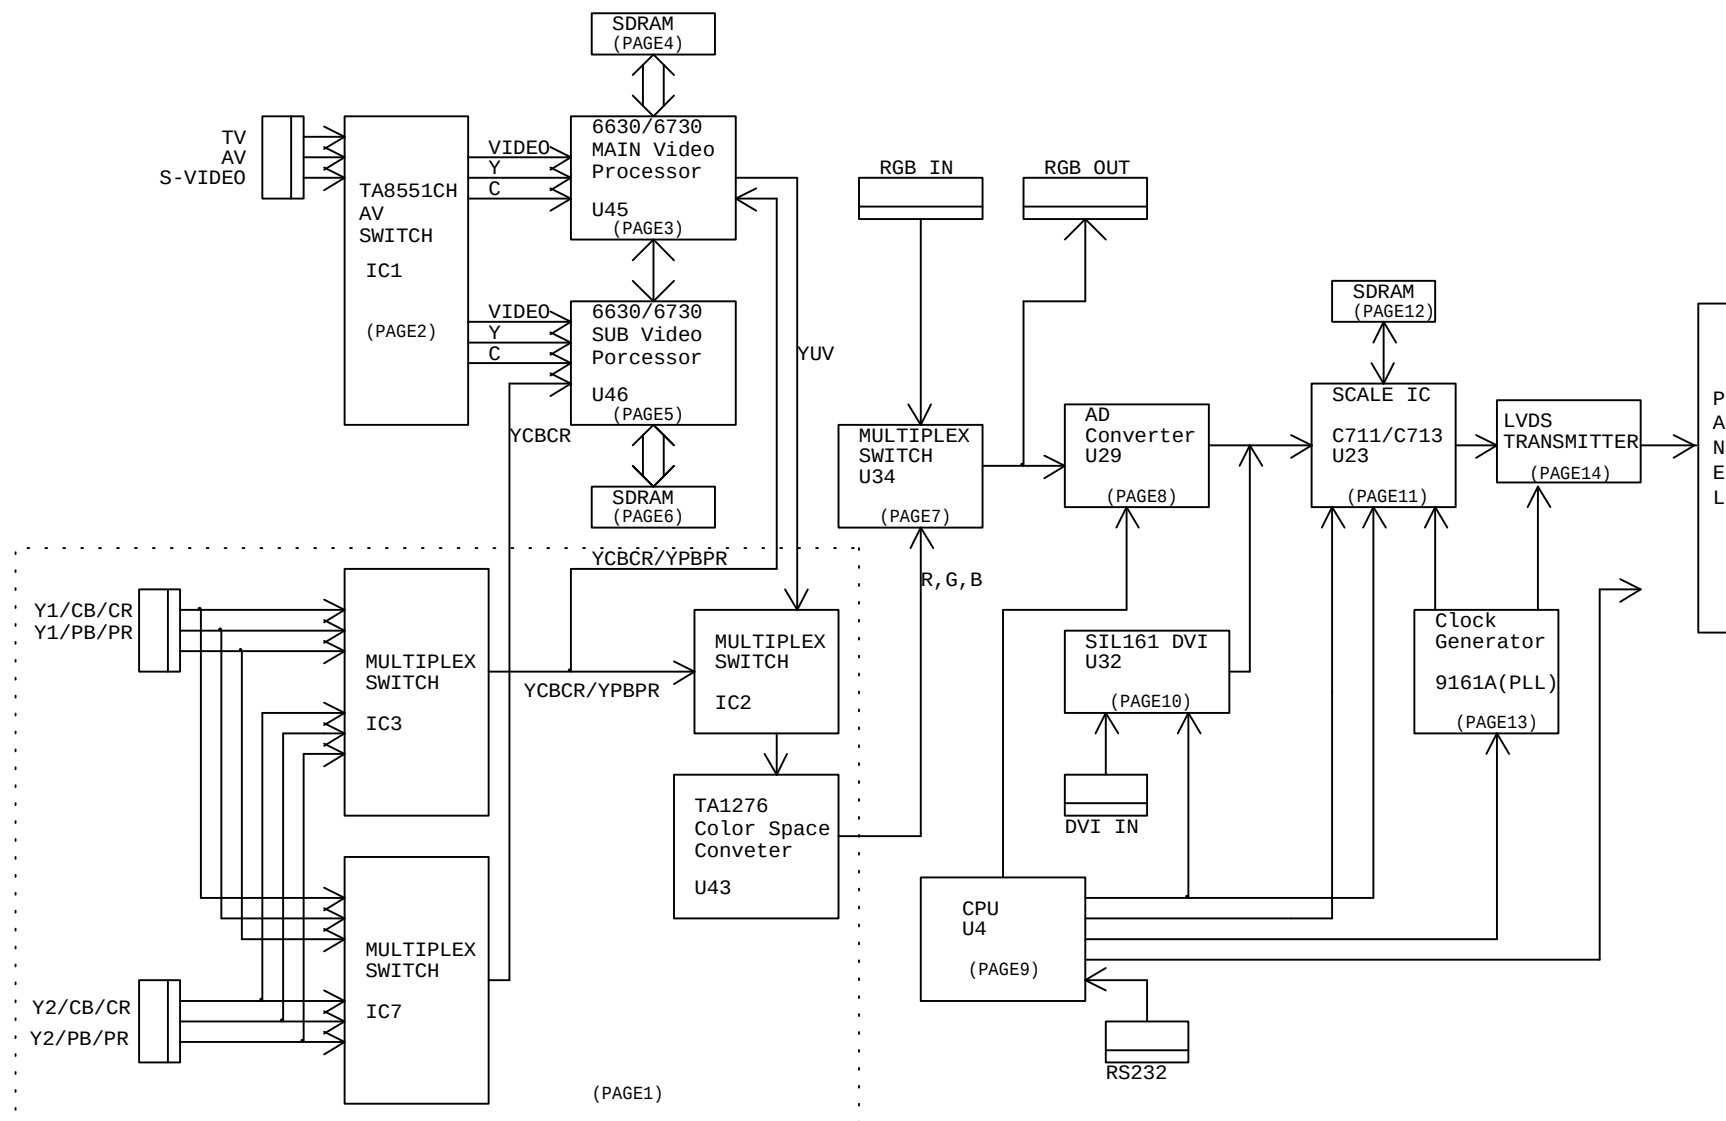


Image board Power Block Diagram

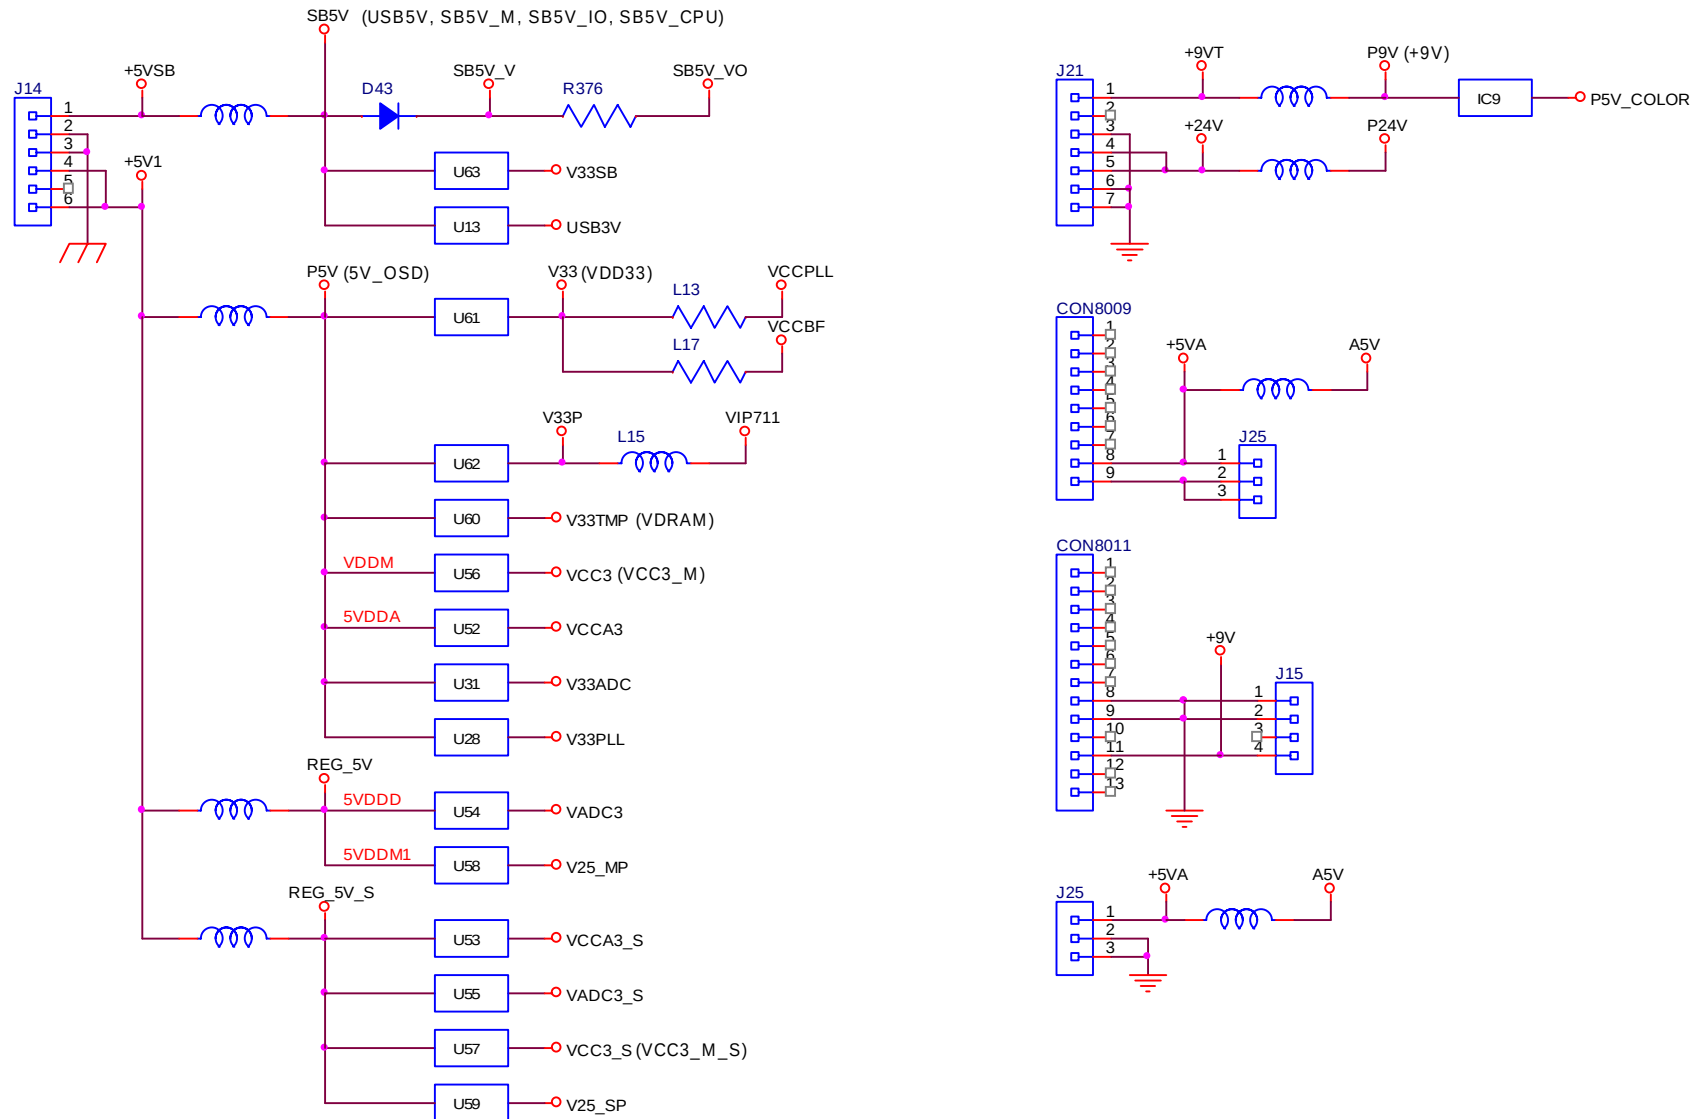


PDP Sound Block Diagram

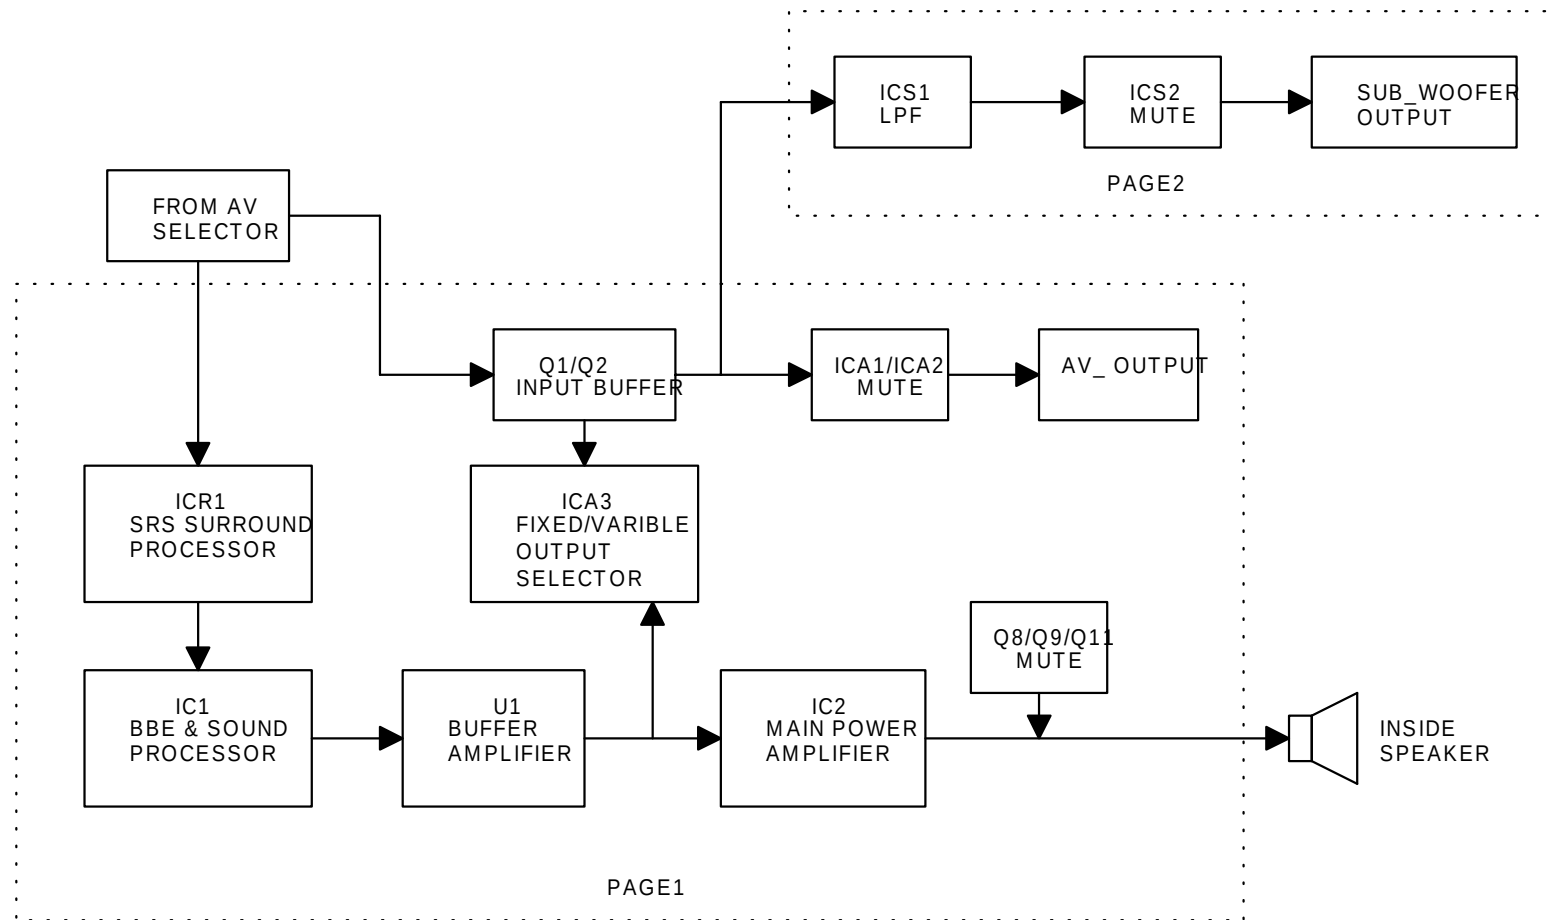


DPWB11372-1G-SS


No Power

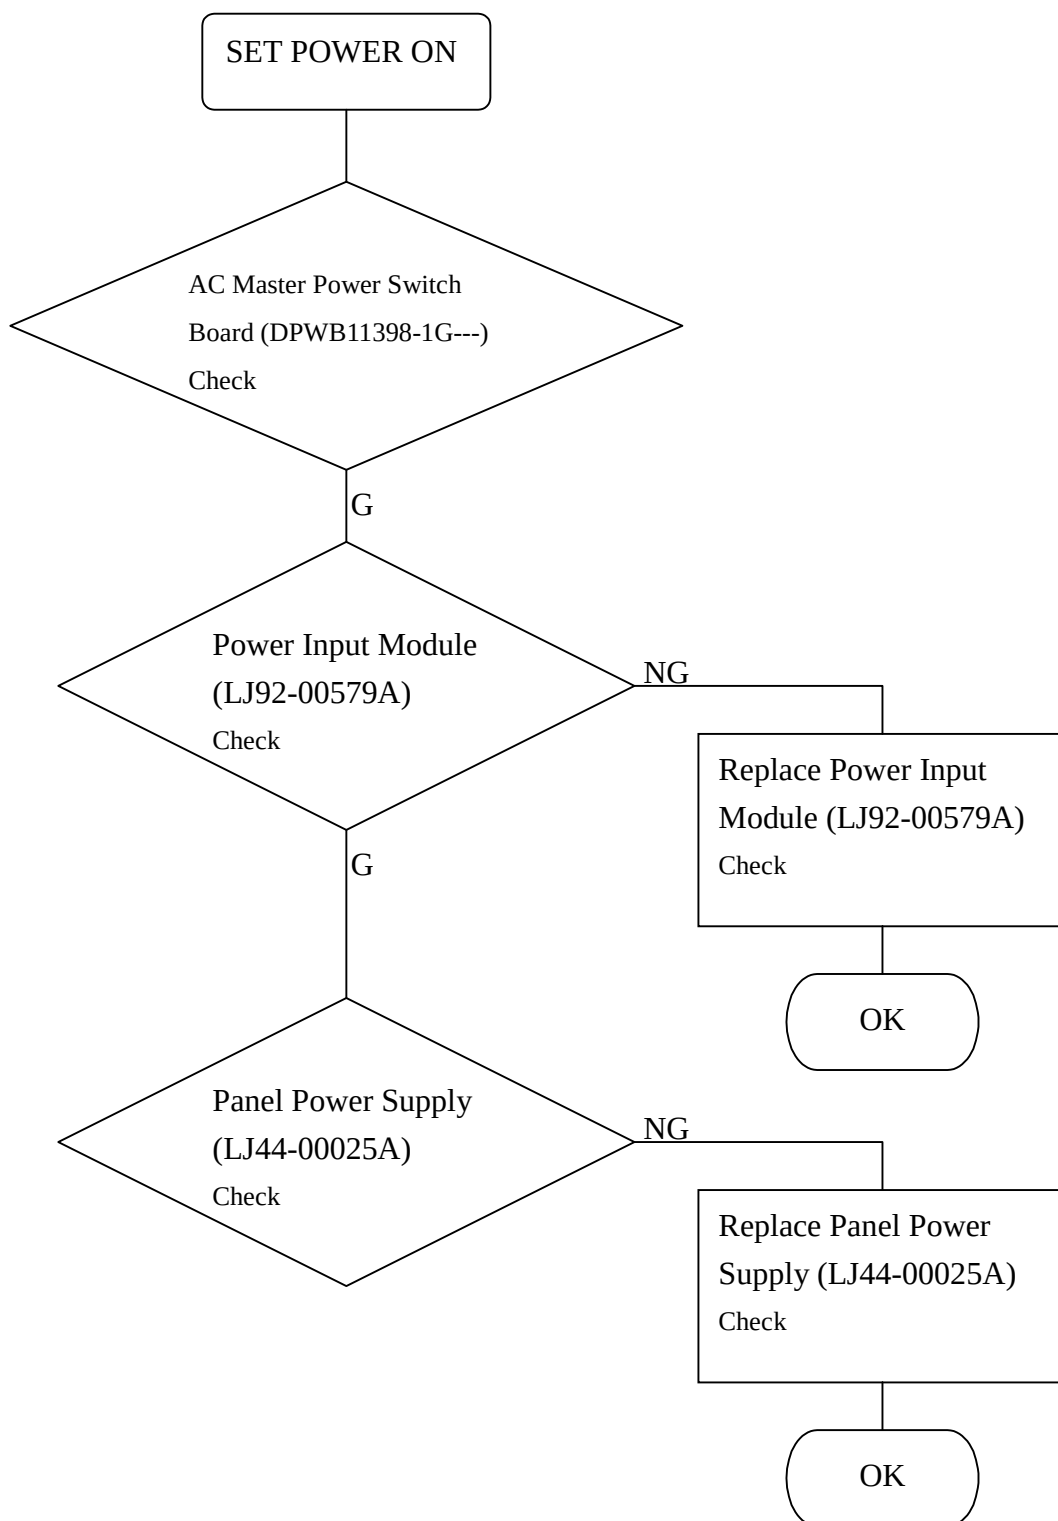


No Picture

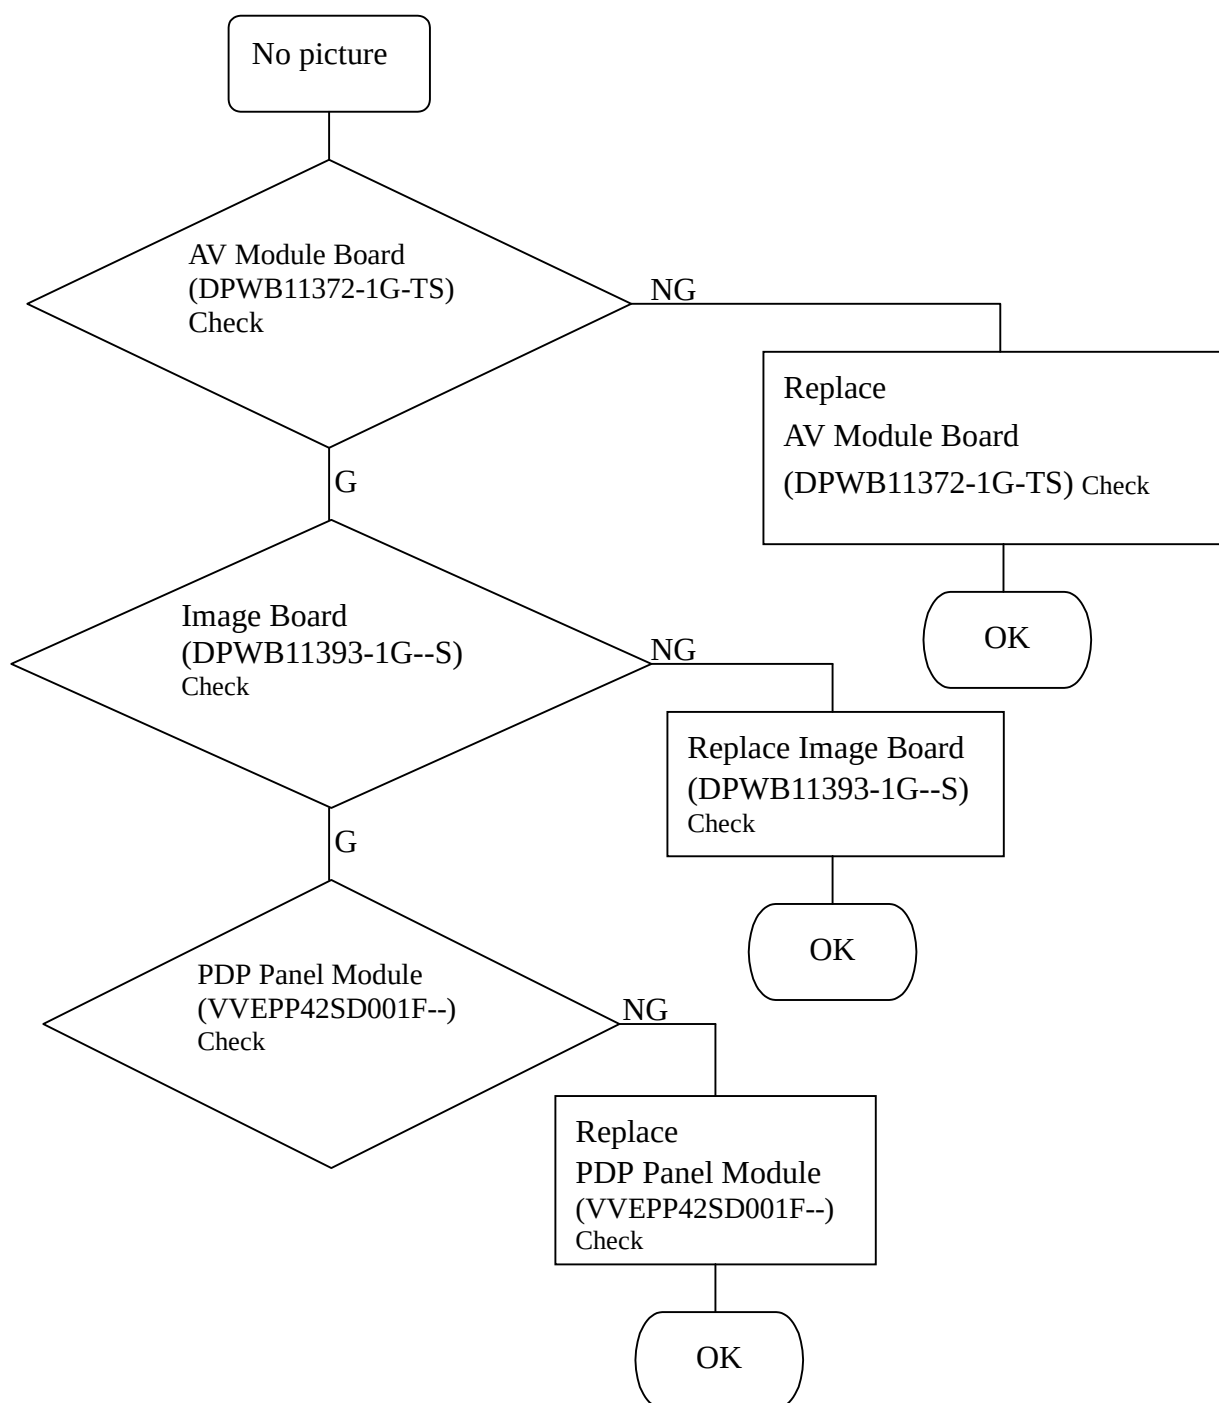


Vertical Line Fail

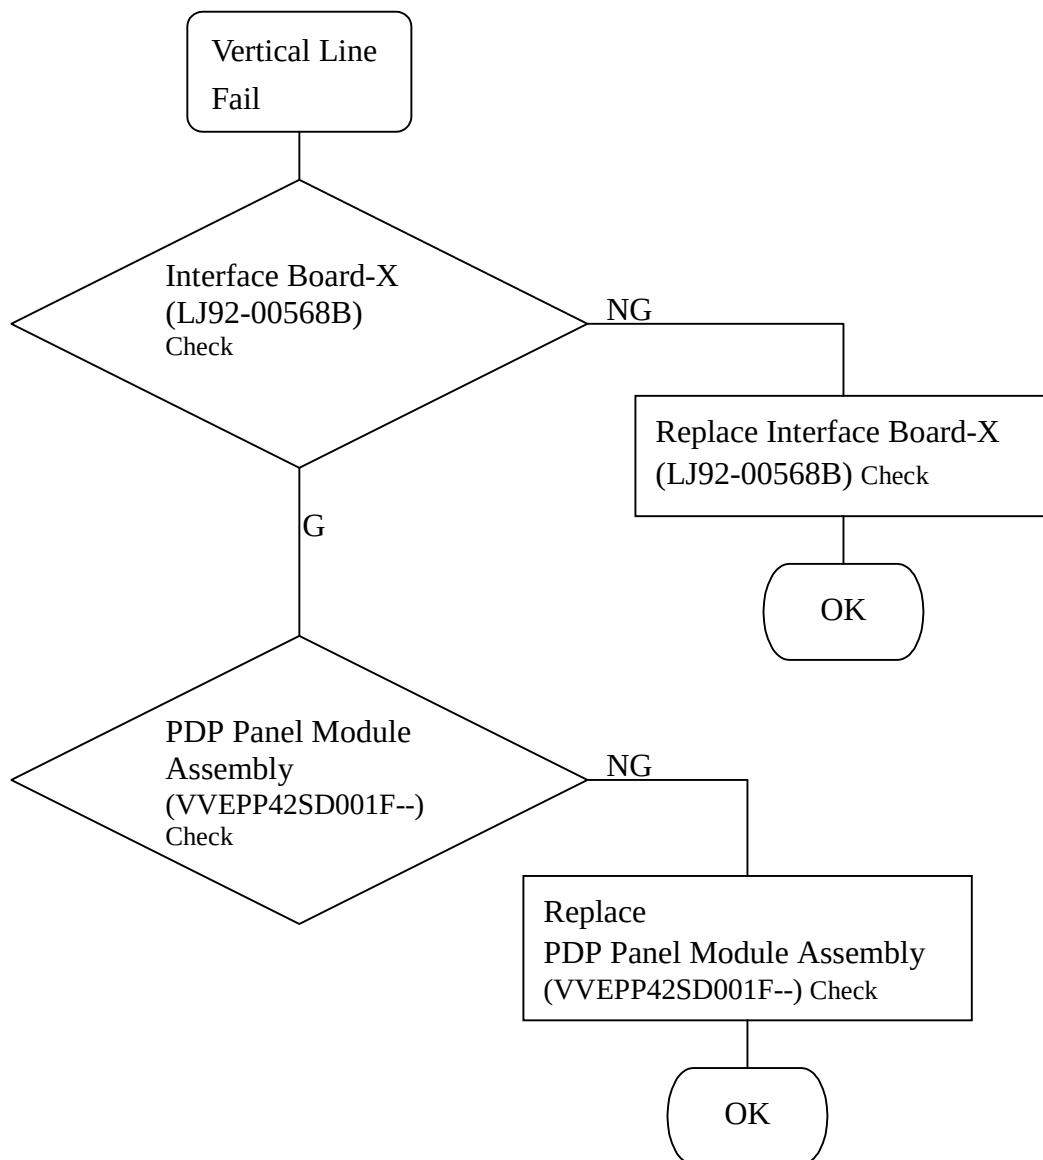


Horizontal Line Fail

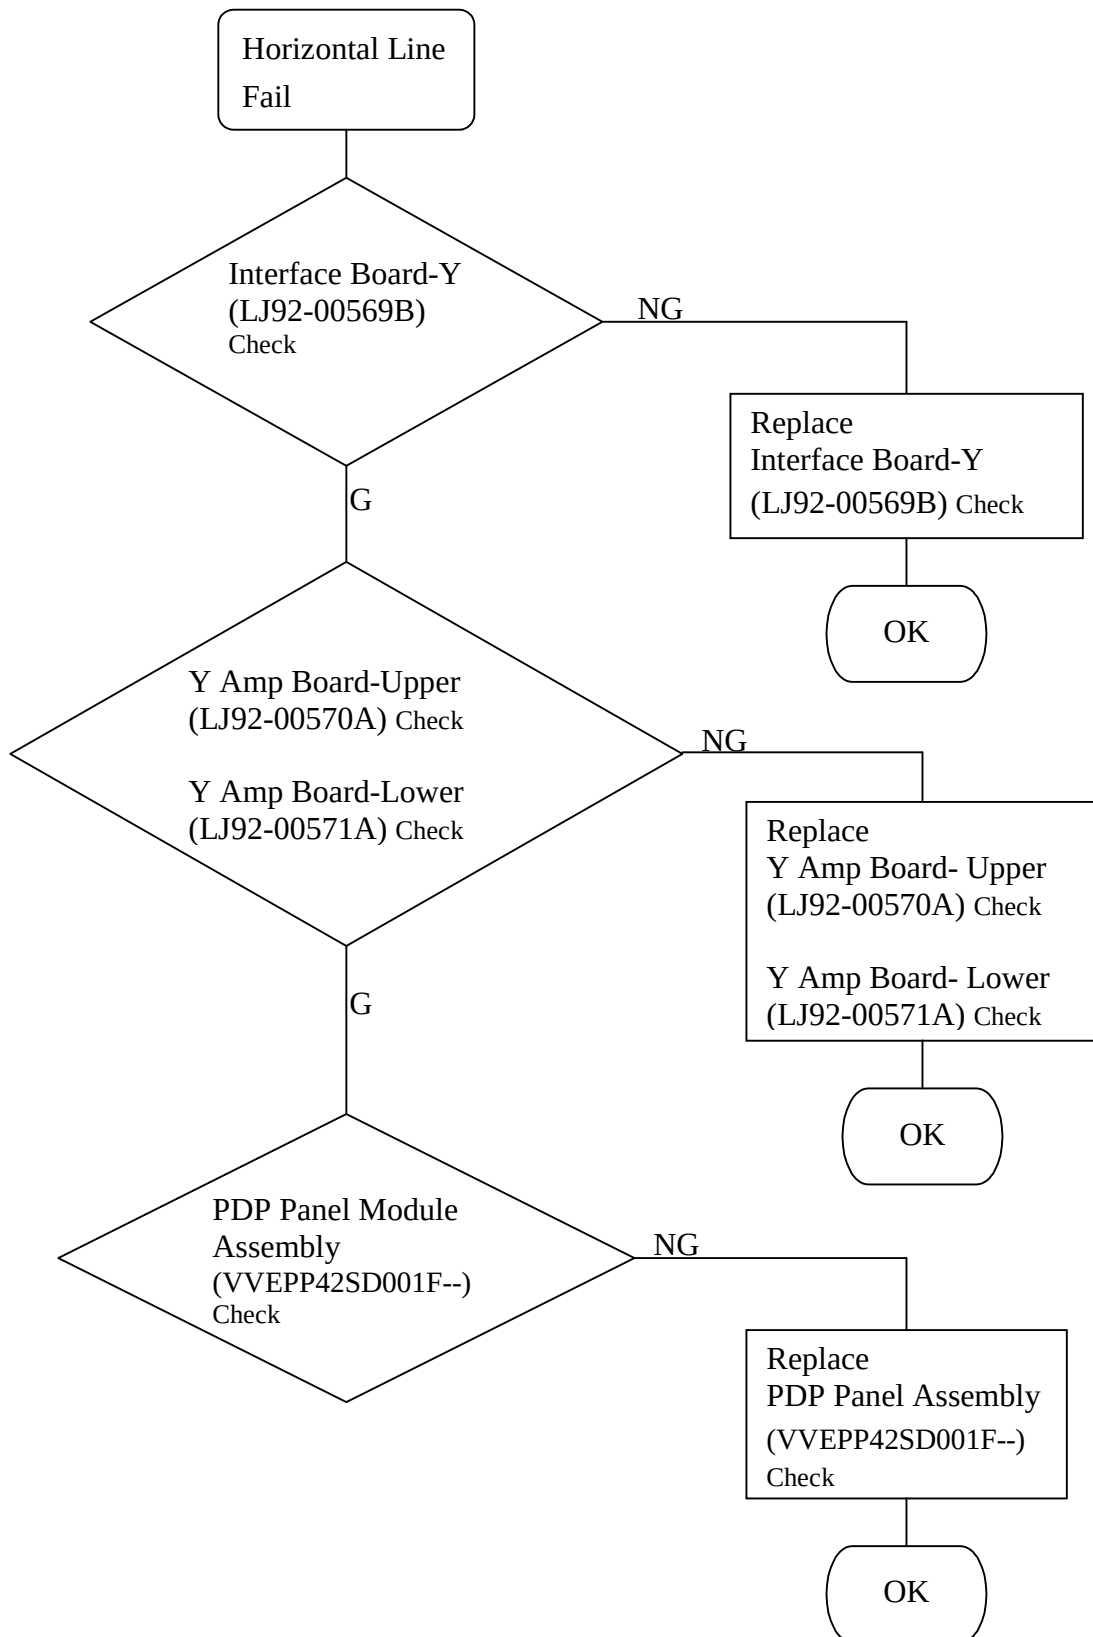

No Remote Control

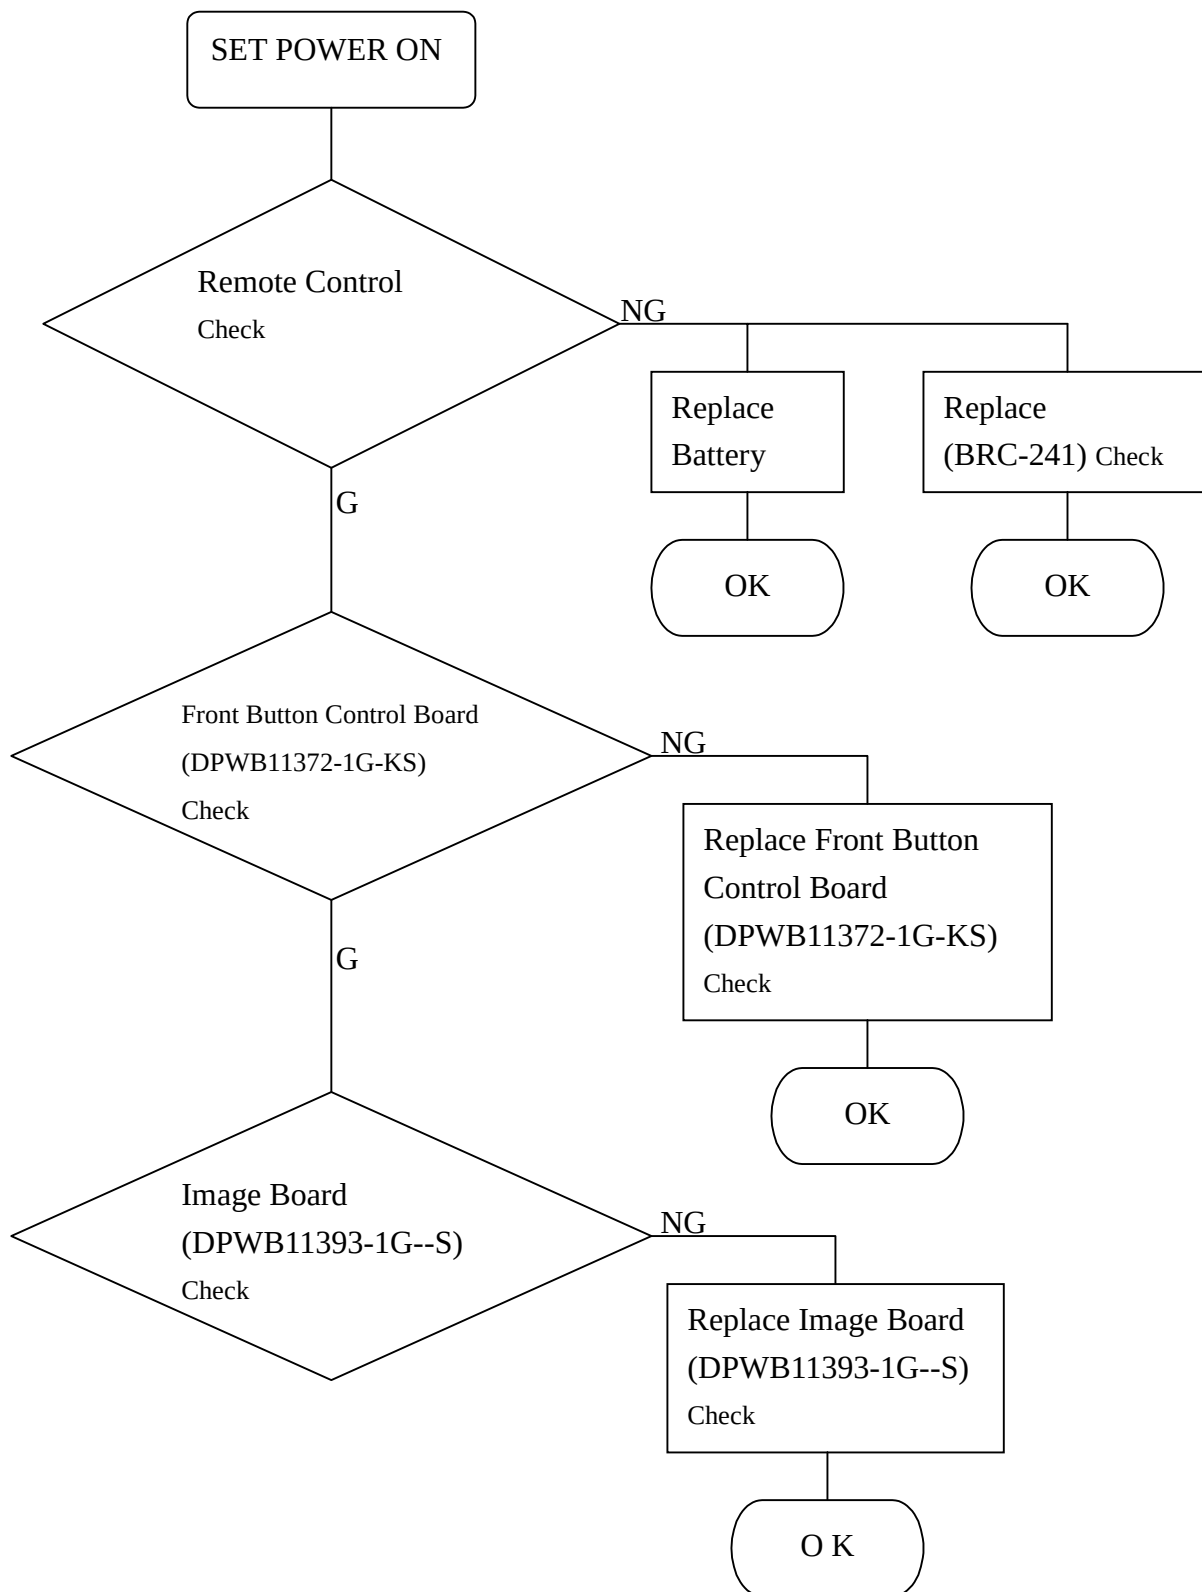


Front Button Fail

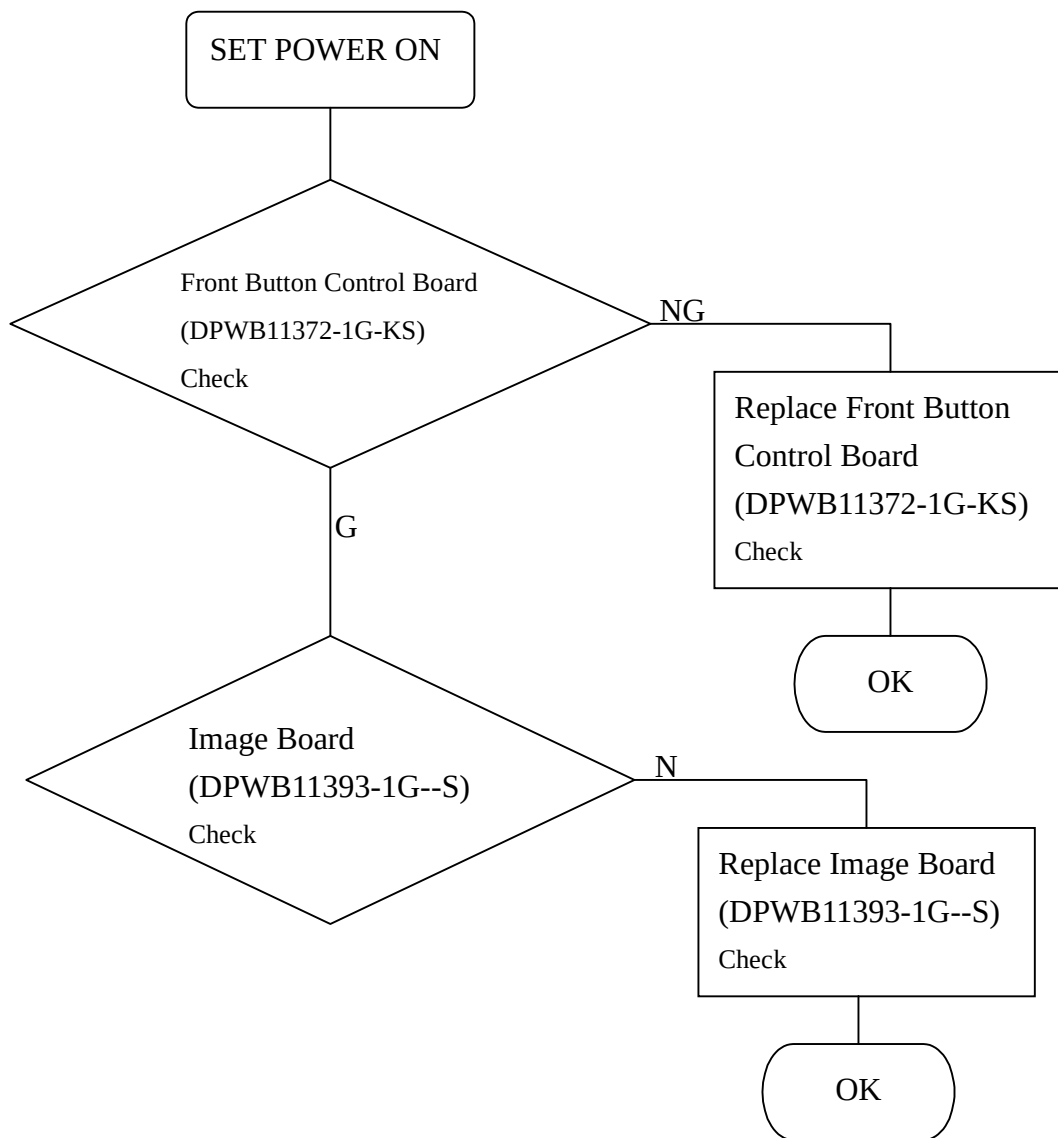




MODULE NAME	PART NO.
IMAGE BOARD ASS'Y	DPWB11393-1G--S

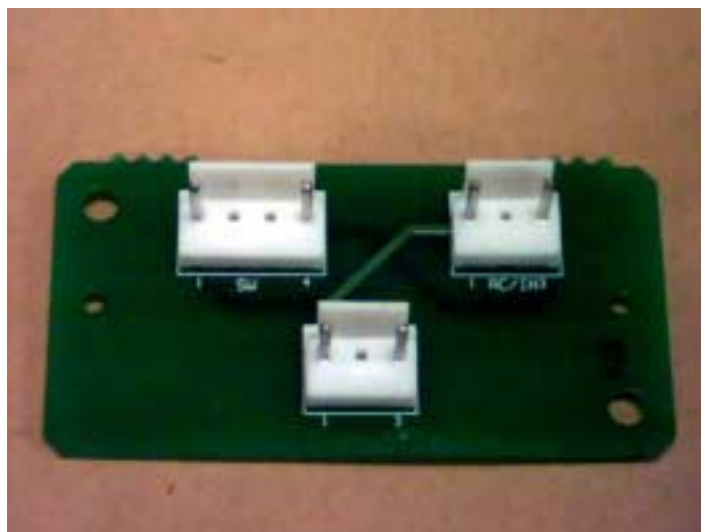


MODULE NAME	PART NO.
AC MASTER POWER SWITCH B/D ASS'Y	DPWB11398-1G---

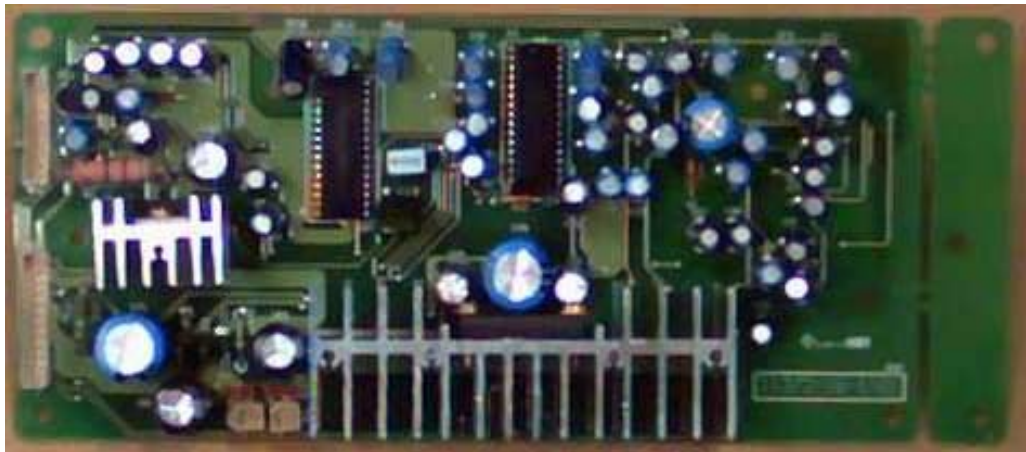

MODULE NAME	PART NO.
AUDIO AMPLIFIER BOARD ASS'Y	DPWB11372-1G-SS



MODULE NAME	PART NO.
FRONT BUTTON CONTROL BOARD ASS'Y	DPWB11372-1G-KS

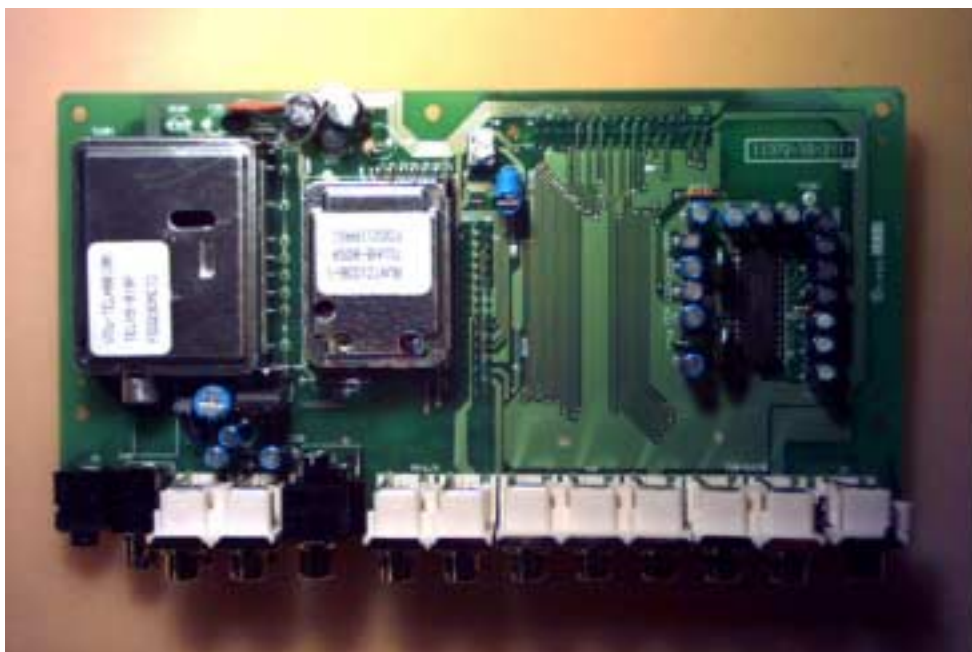


MODULE NAME	PART NO.
AV MODULE BOARD ASS'Y	DPWB11372-1G-TS



MODULE NAME	PART NO.
INTERFACE BOARD- Y A'SSY	LJ92-00569B



MODULE NAME	PART NO.
LOGIC BOARD ASS'Y	LJ92-00573

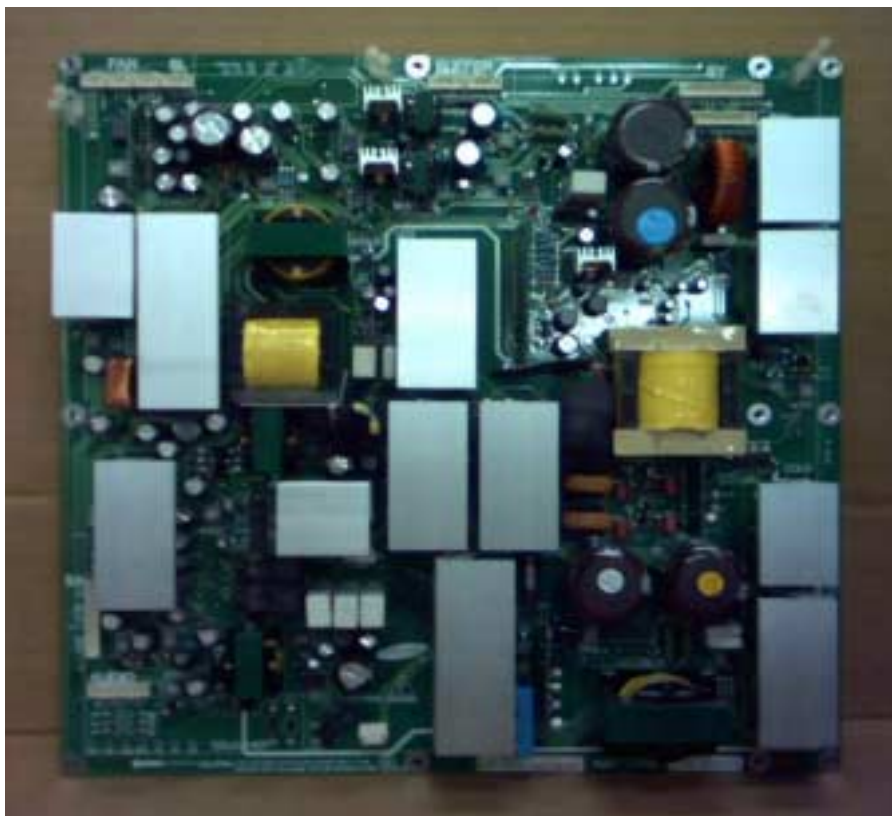

MODULE NAME	PART NO.
PANEL POWER SUPPLY ASS'Y	LJ44-00025A



MODULE NAME	PART NO.
POWER INPUT MODULE ASS'Y	LJ92-00579A



MODULE NAME	PART NO.
INTERFACE BOARD- X ASS'Y	LJ92-00568B



MODULE NAME	PART NO.
LOGIC E-BUFFER ASS'Y	LJ92-00581A



MODULE NAME	PART NO.
Y AMP BOARD-UPPER ASS'Y	LJ92-00570A



MODULE NAME	PART NO.
Y AMP BOARD-LOWER ASS'Y	LJ92-00571A




MODULE NAME	PART NO.
LOGIC F-BUFFER ASS'Y	LJ92-00582A


P.C. BOARD TOP VIEW





MODULE NAME	PART NO.
PDP PANEL MODULE ASS'Y	VVEPP42SD001F--

Model Name: PLT-42TT				
No.	Module	Supplier	Supplier's Part Number	Quantity Per Final Assembly
1	Image Board	Sampo	DPWB11393-1G--S	1
2	AC Master Power Switch Board	Sampo	DPWB11398-1G---	1
3	Audio Amplifier Board	Sampo	DPWB11372-1G-SS	1
4	Front Button Control Board	Sampo	DPWB11372-1G-KS	1
5	AV Module Board (with tuner)	Sampo	DPWB11372-1G-AS	1
6	Interface Board- Y	Samsung	LJ92-00569B	1
7	Logic Board	Samsung	LJ92-00573A	1
8	Panel Power Supply	Samsung	LJ44-00025A	1
9	Power Input Module	Samsung	LJ92-00579A	1
10	Interface Board- X	Samsung	LJ92-00568B	1
11	Logic E- Buffer	Samsung	LJ92-00581A	1
12	Y Amp Board- Upper	Samsung	LJ92-00570A	1
13	Y Amp Board- Lower	Samsung	LJ92-00571A	1
14	Logic F- Buffer	Samsung	LJ92-00582A	1
15	PDP Panel Module	Samsung	VVEPP42SD001F--	1

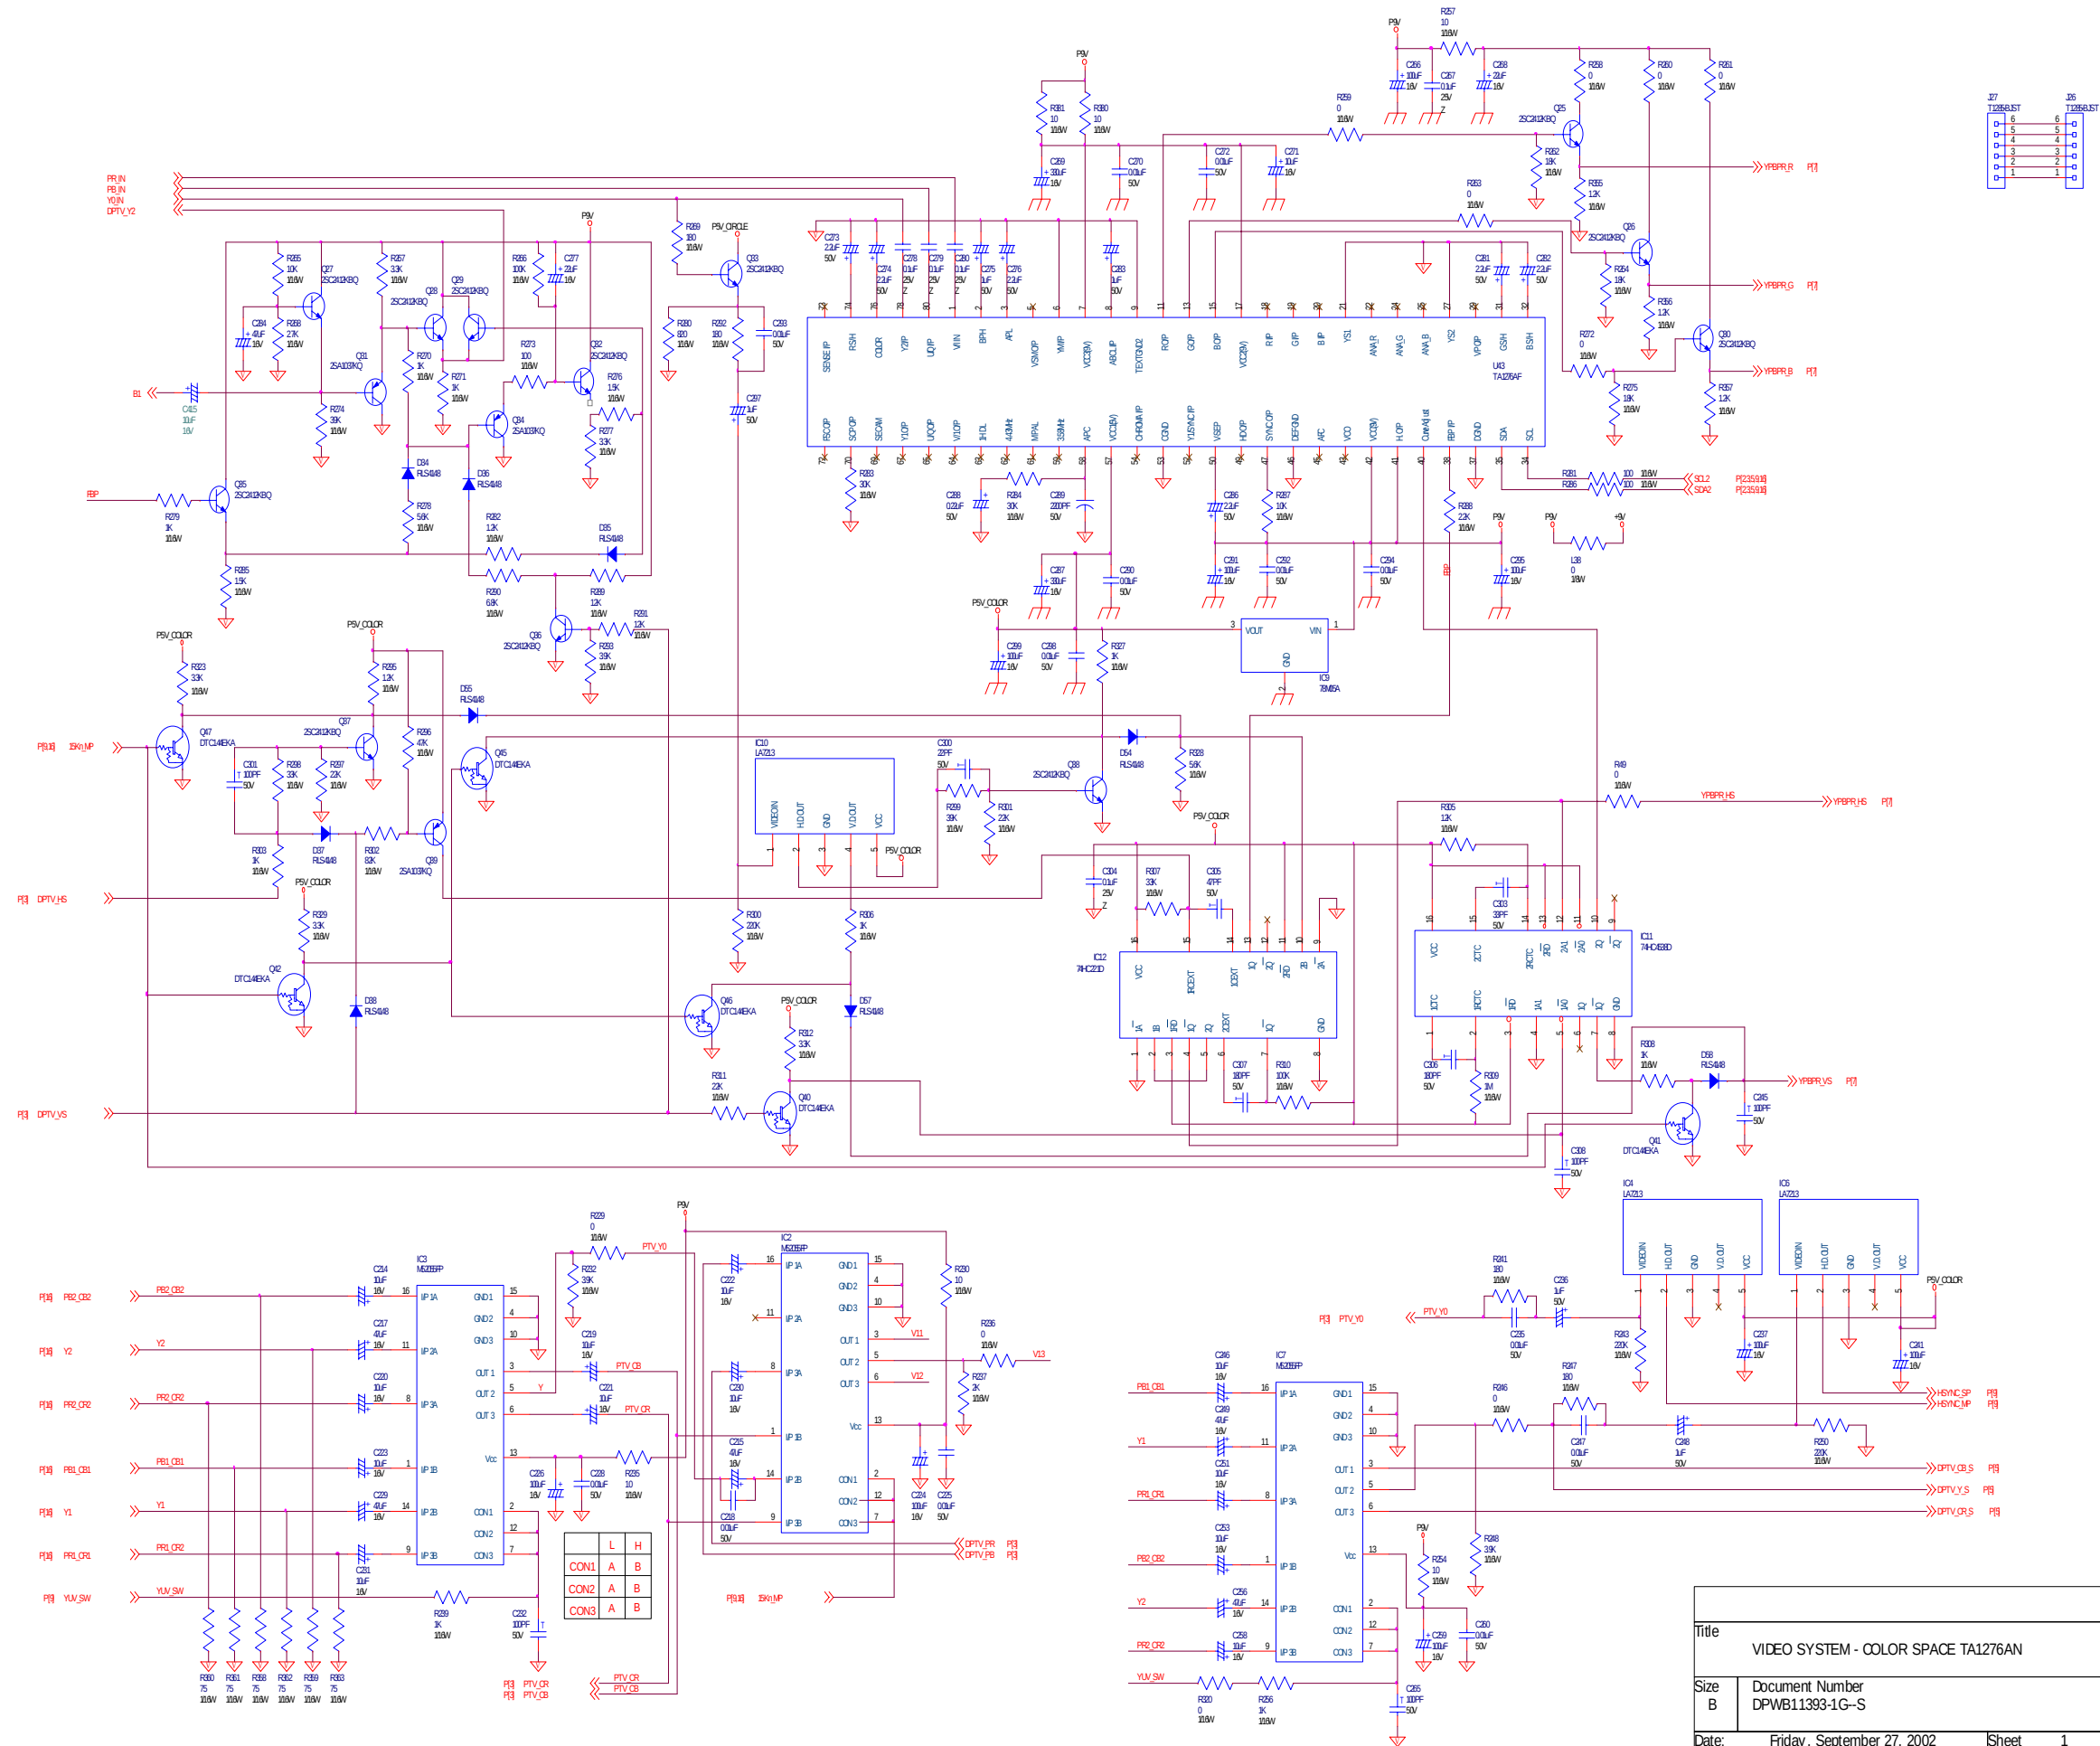

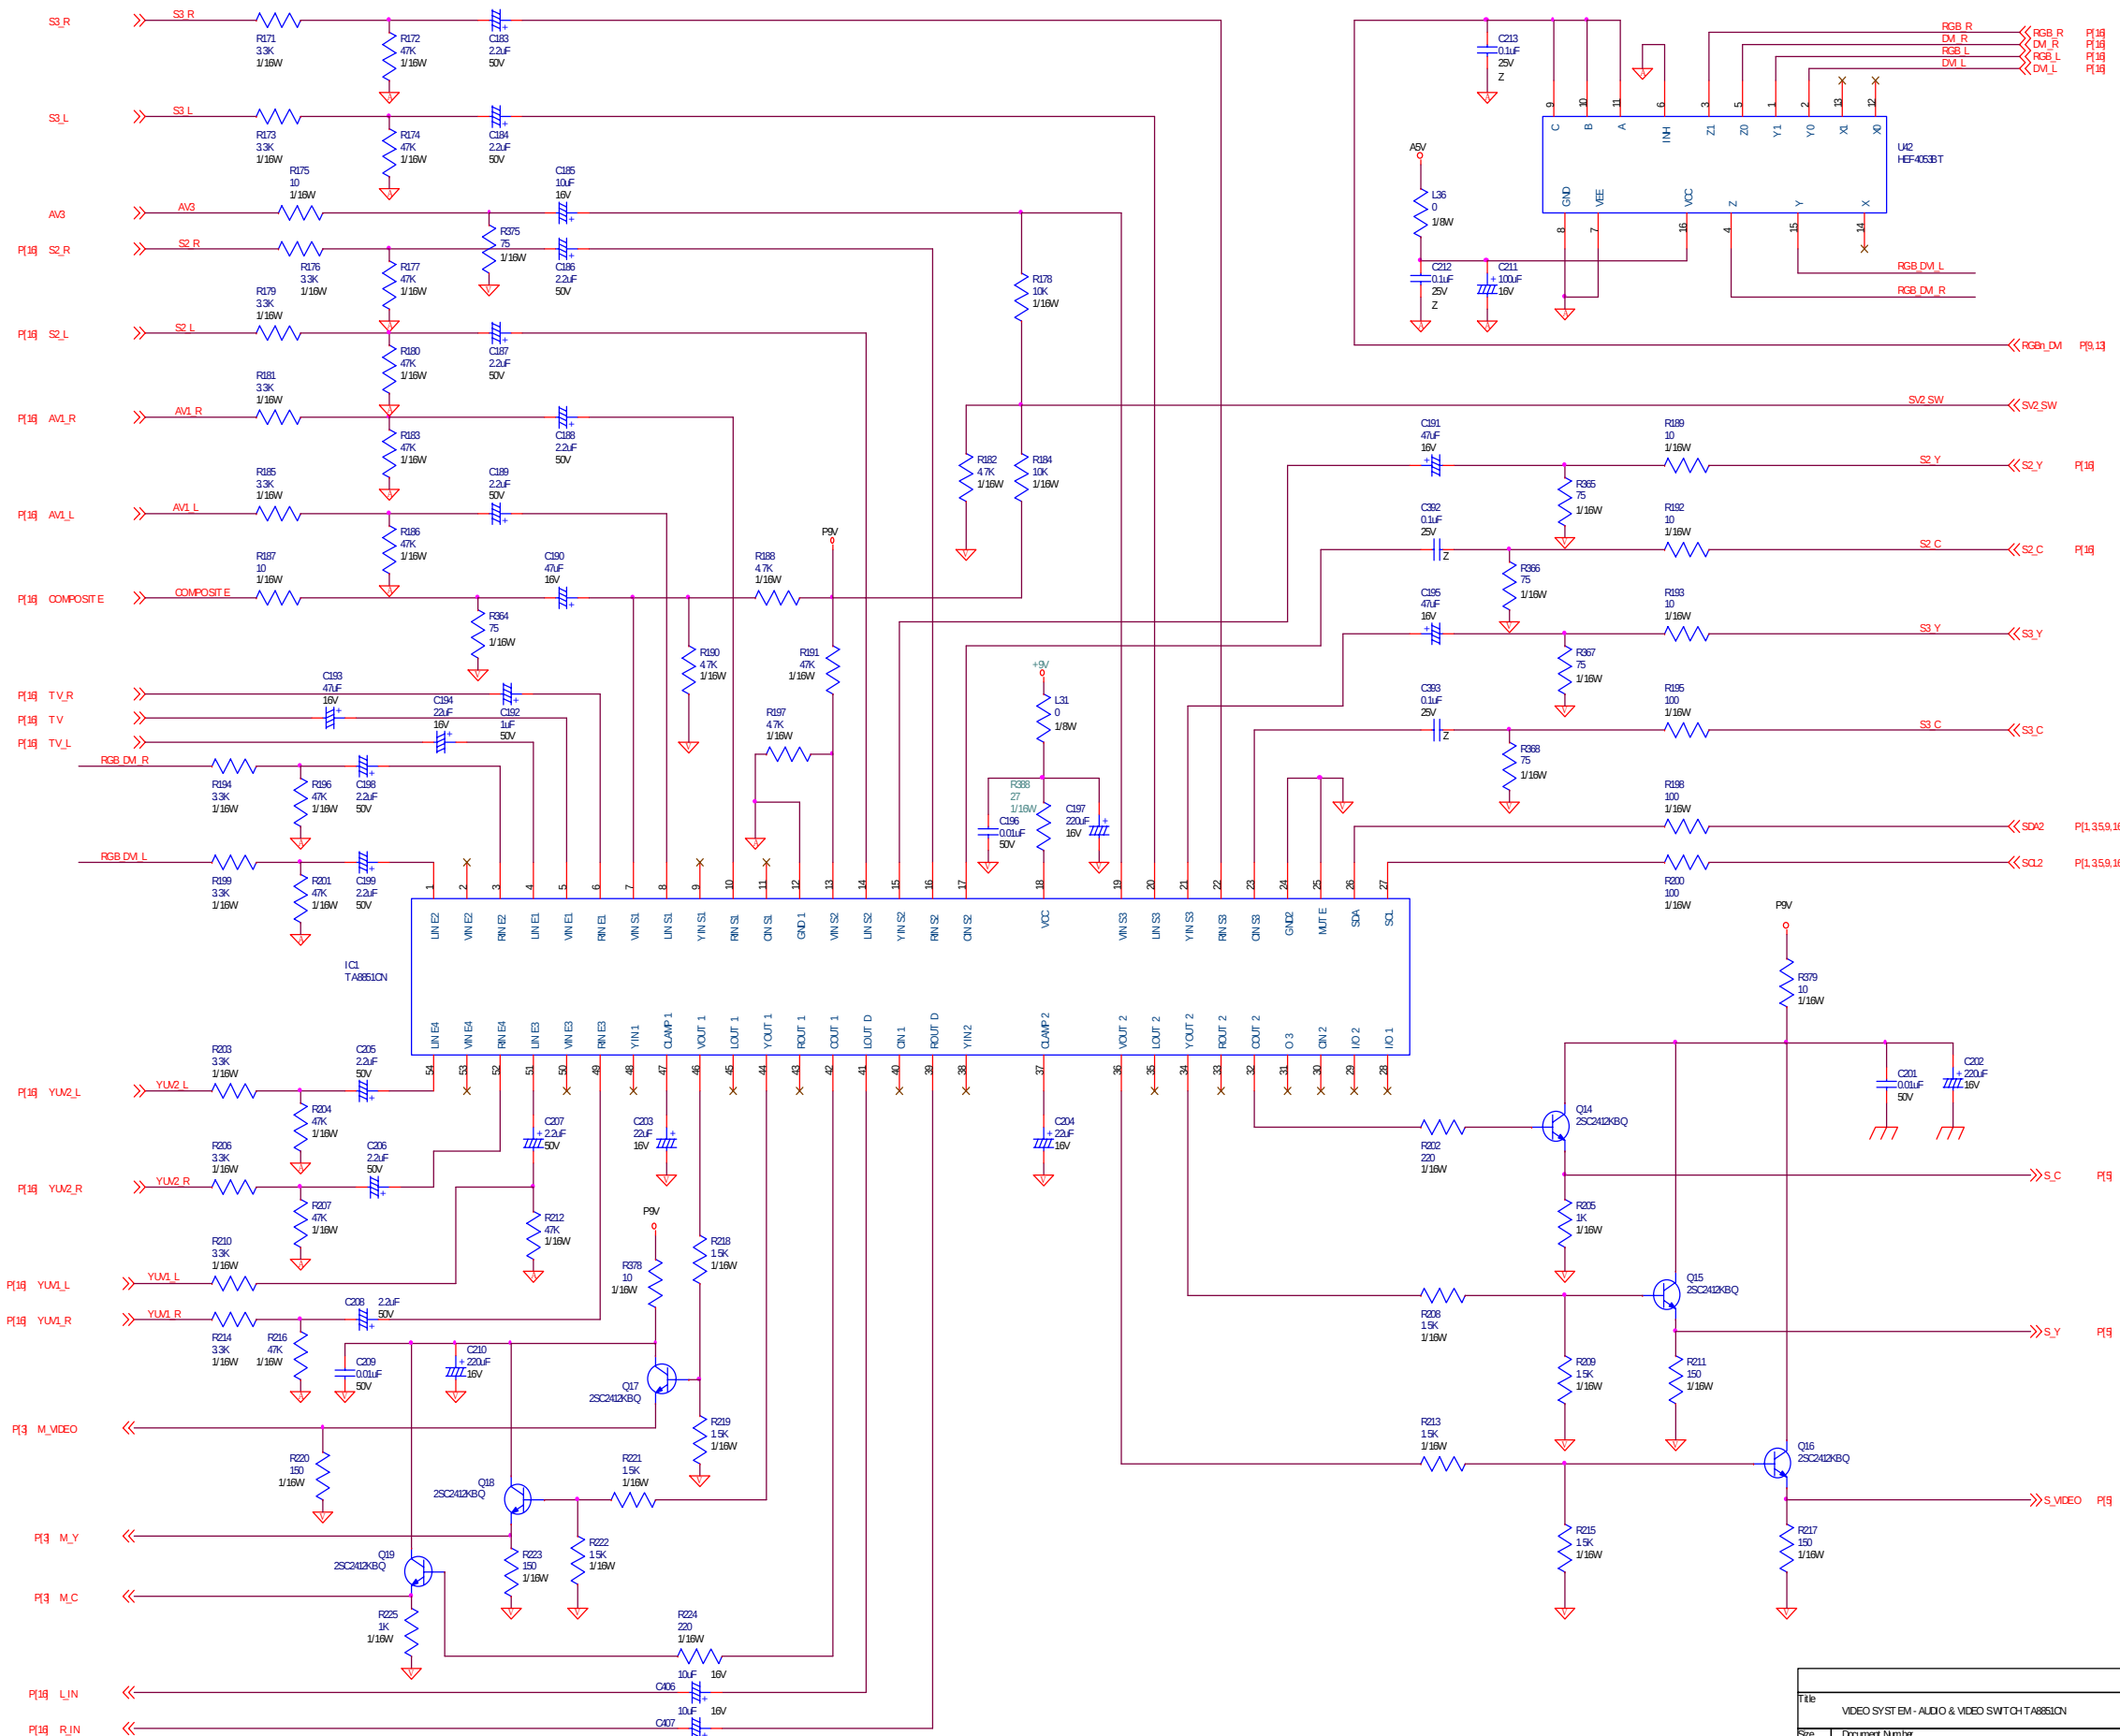


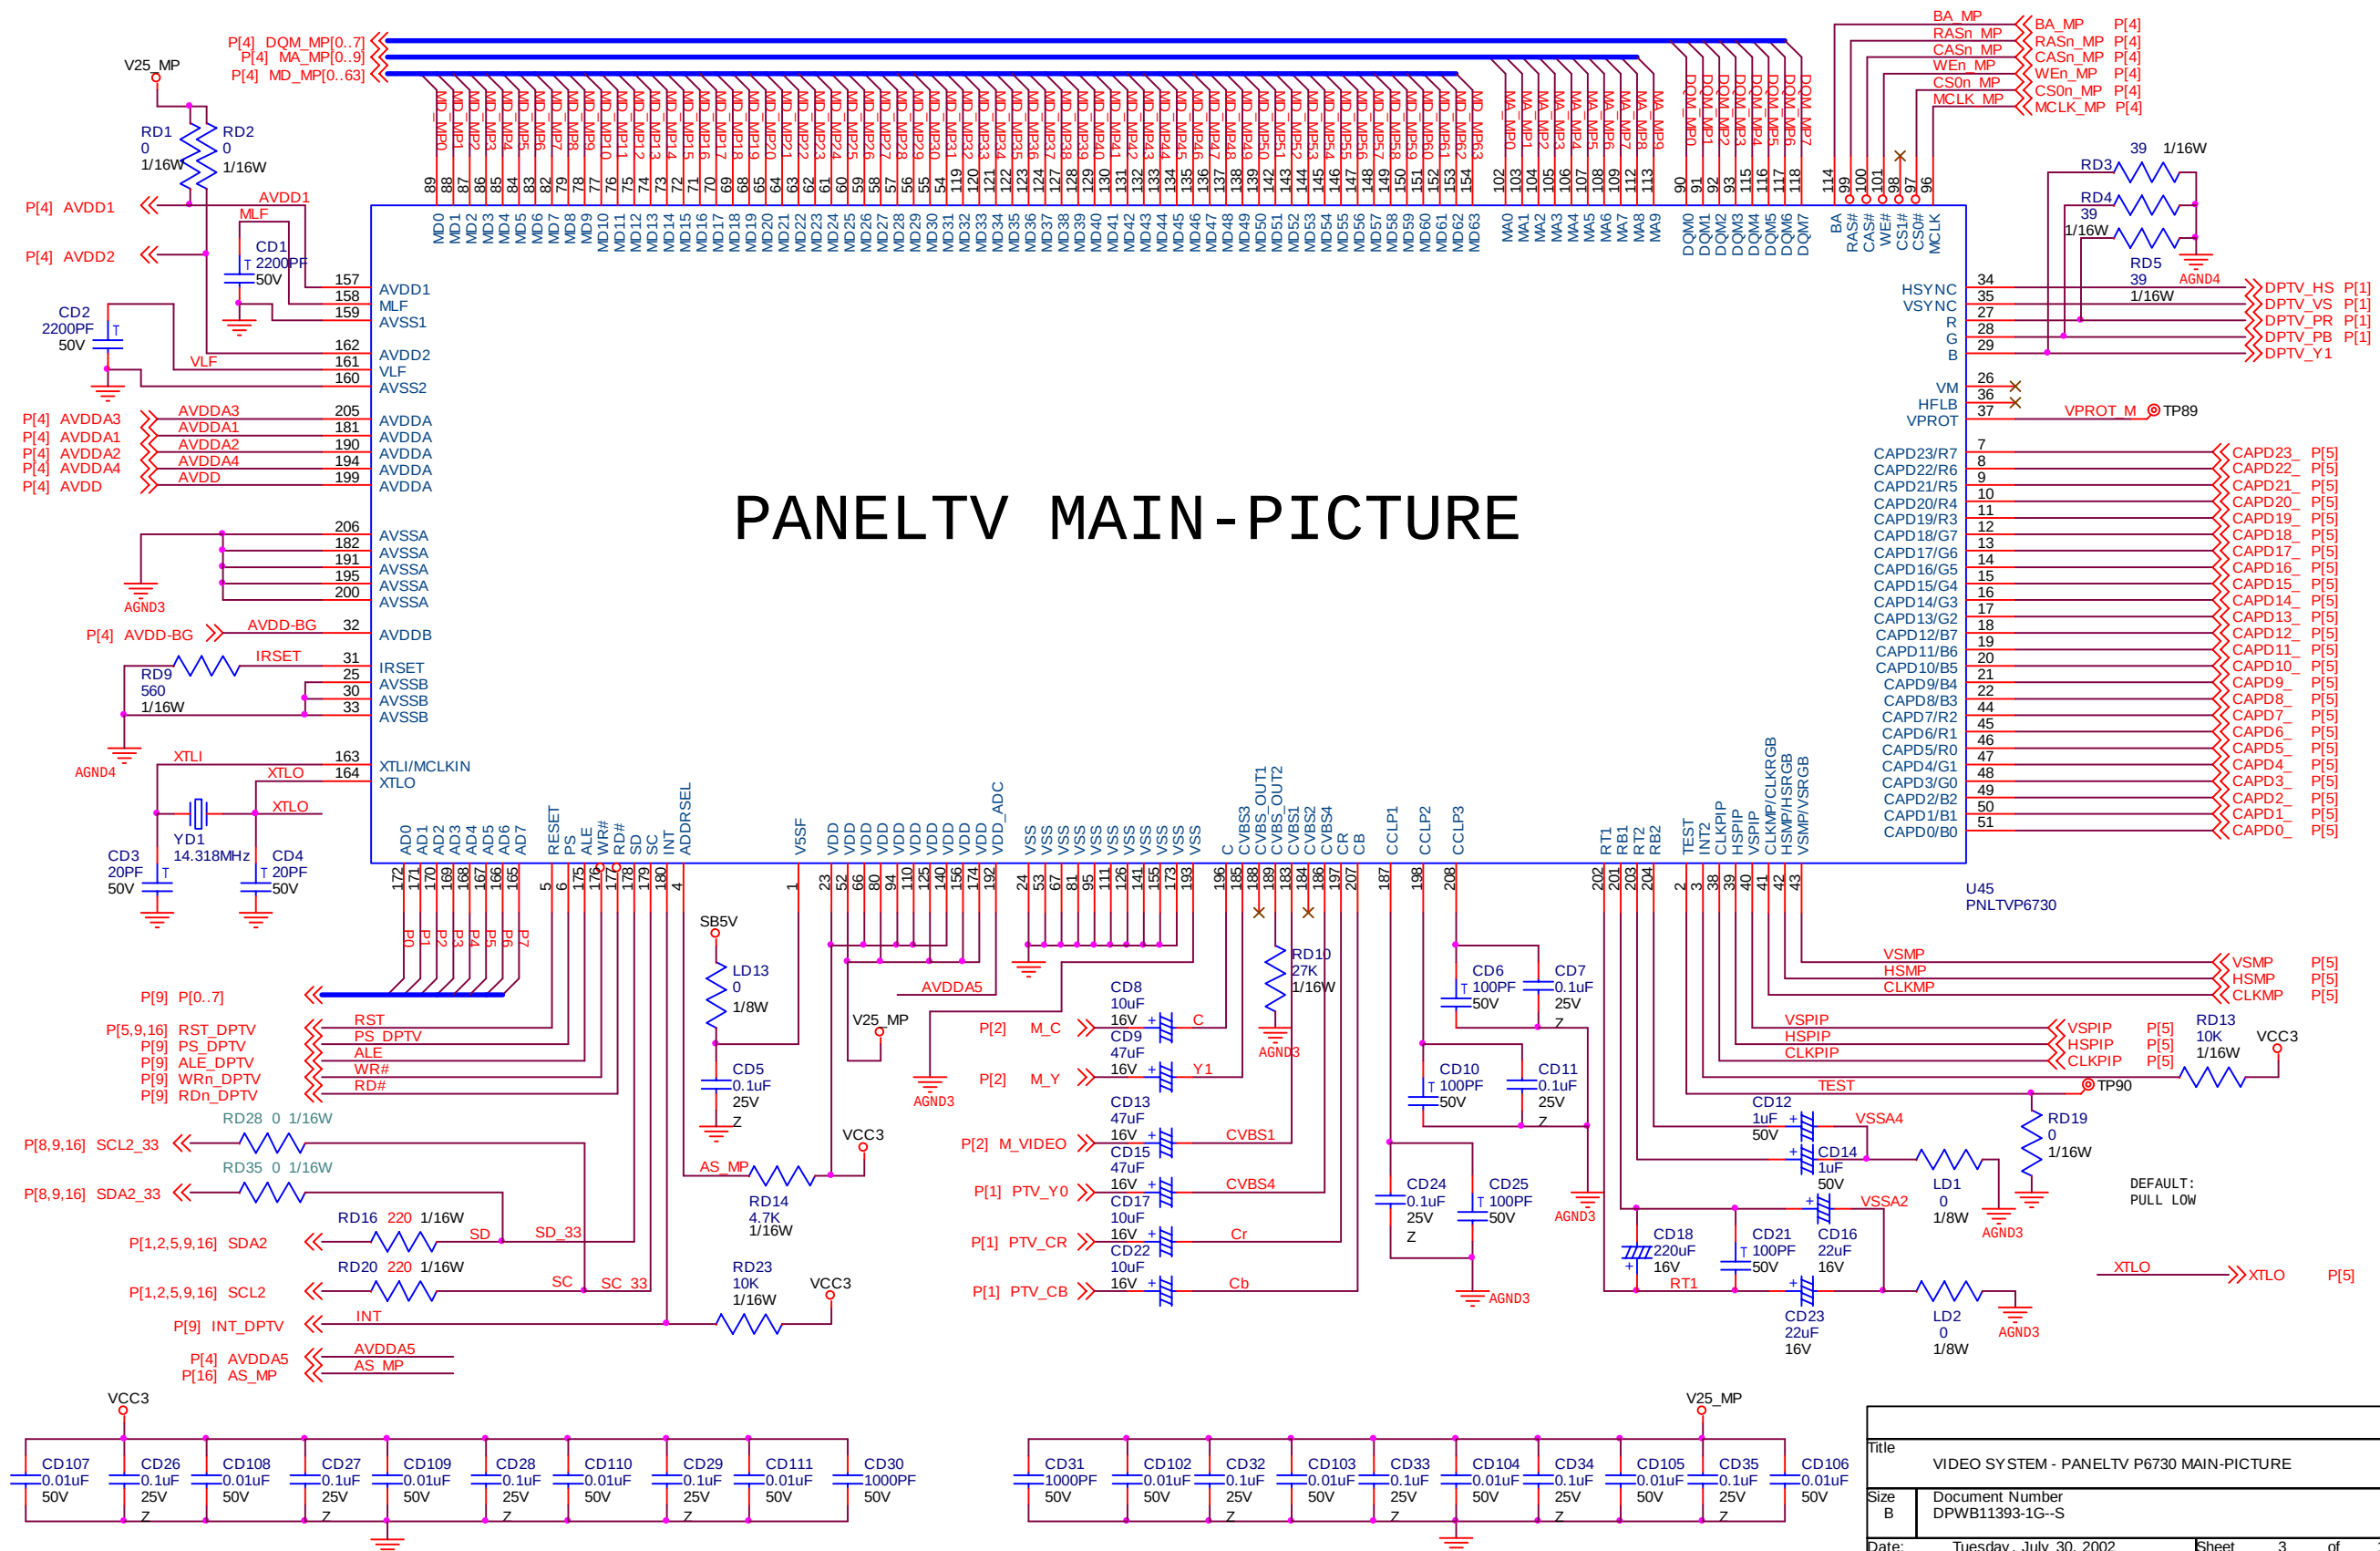


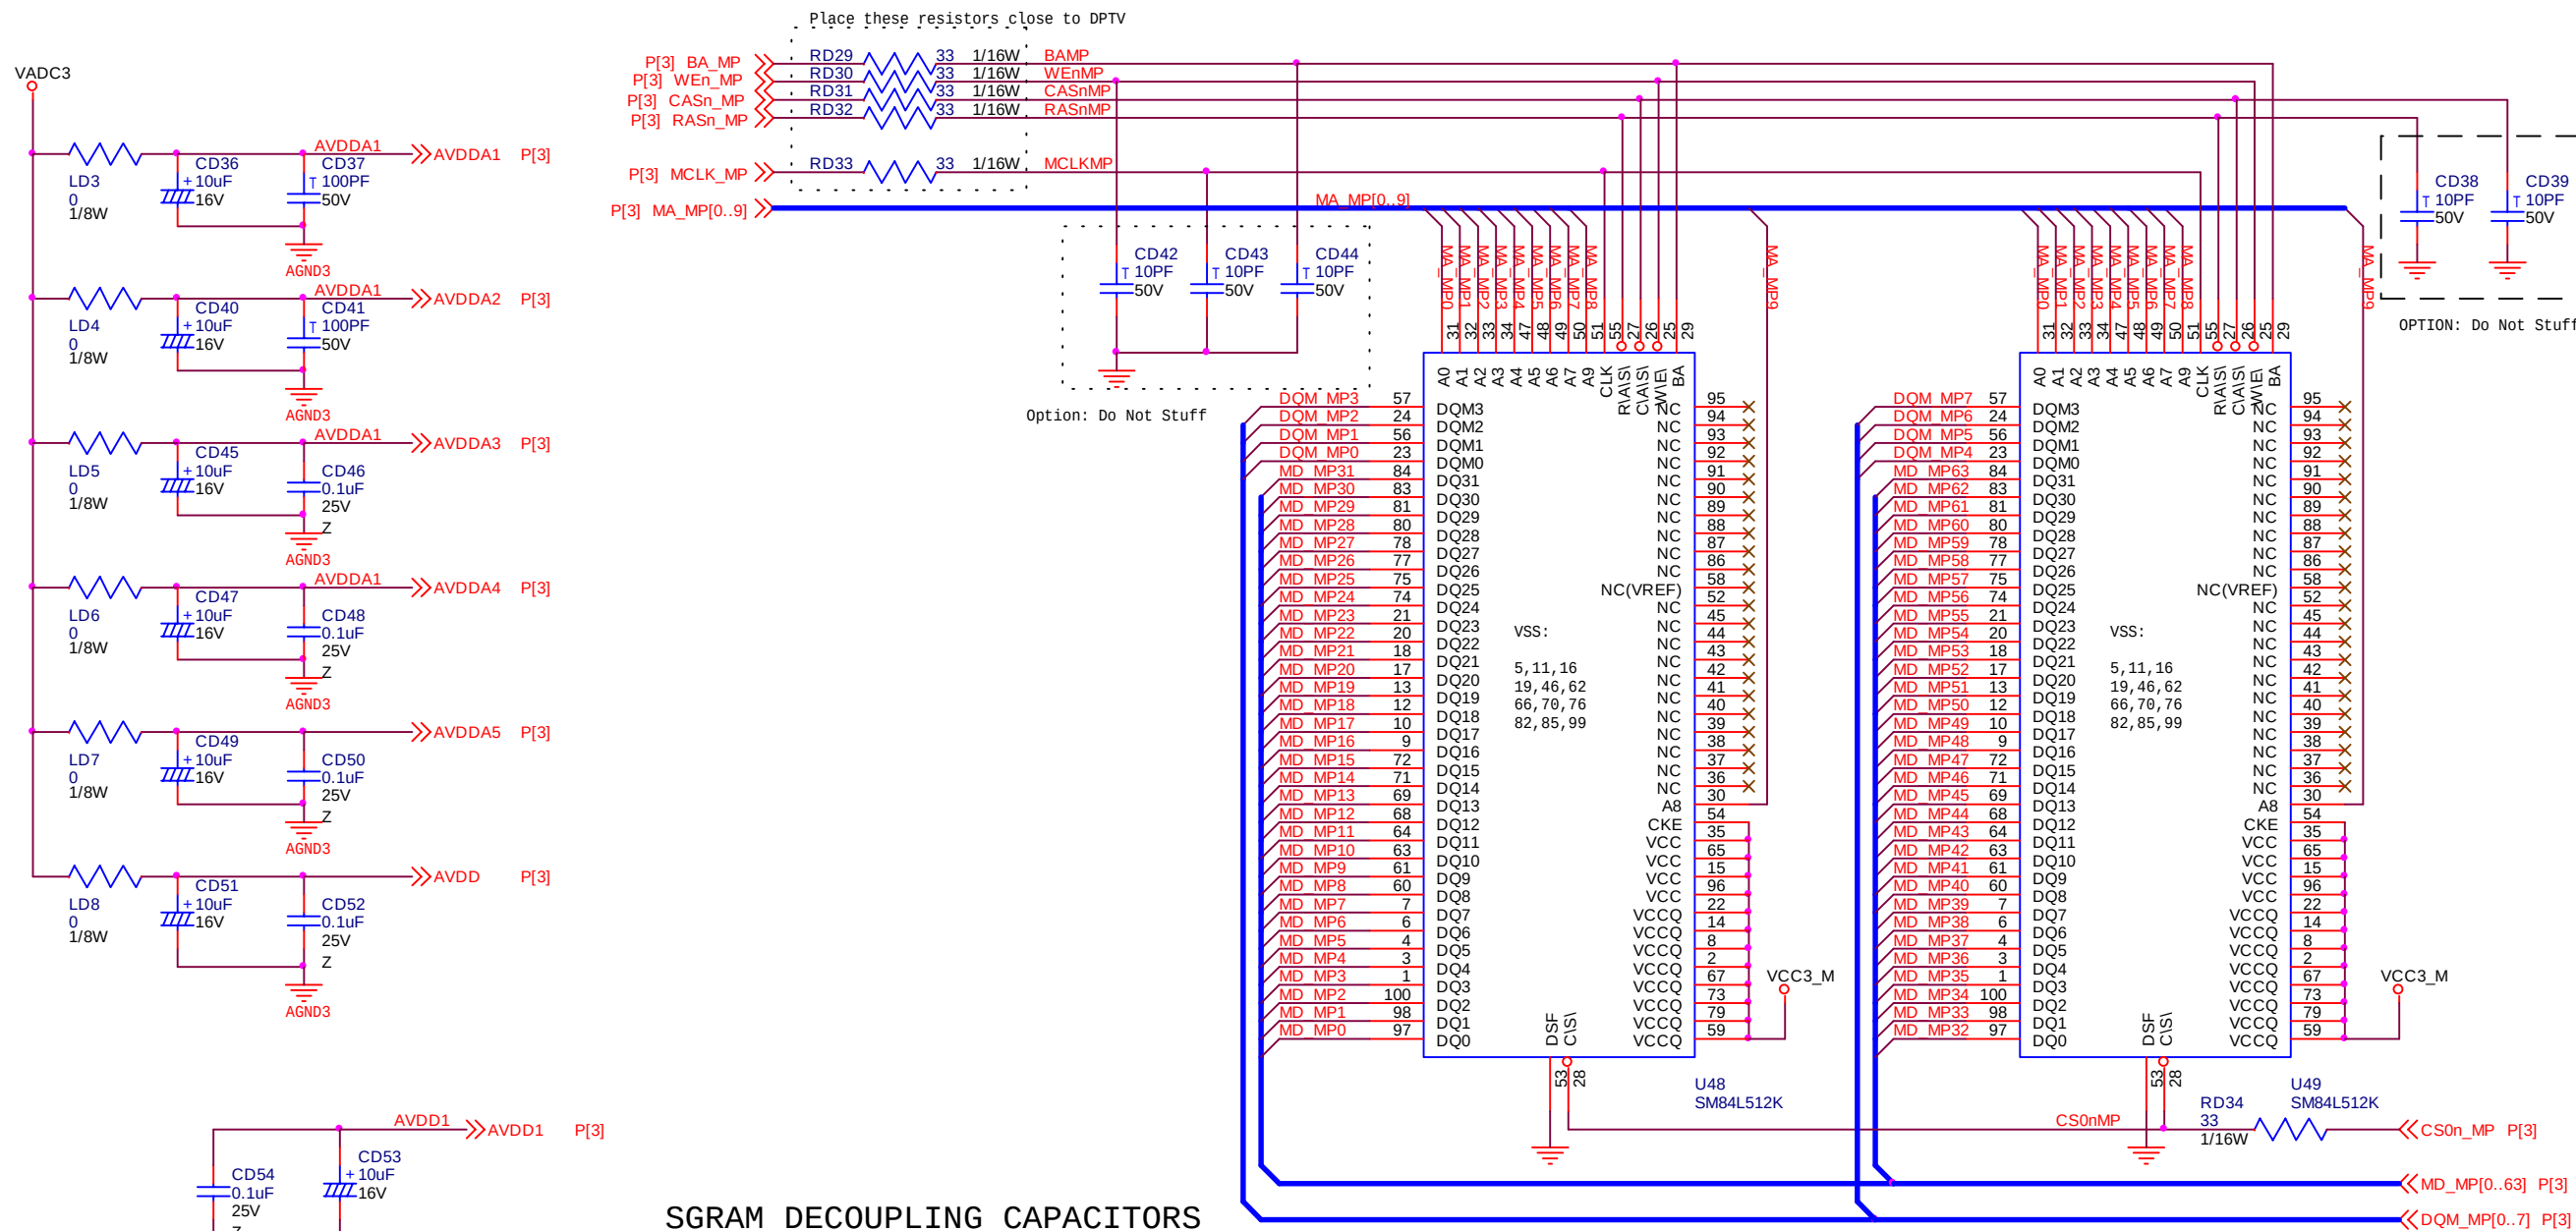




SGRAM DECOUPLING CAPACITORS

Title		
VIDEO SYSTEM - PANELTV MP SGRAM		
Size	Document Number	Rev
B	DPWB11393-1G--S	1.0
Date:	Tuesday, July 30, 2002	Sheet 4 of 16

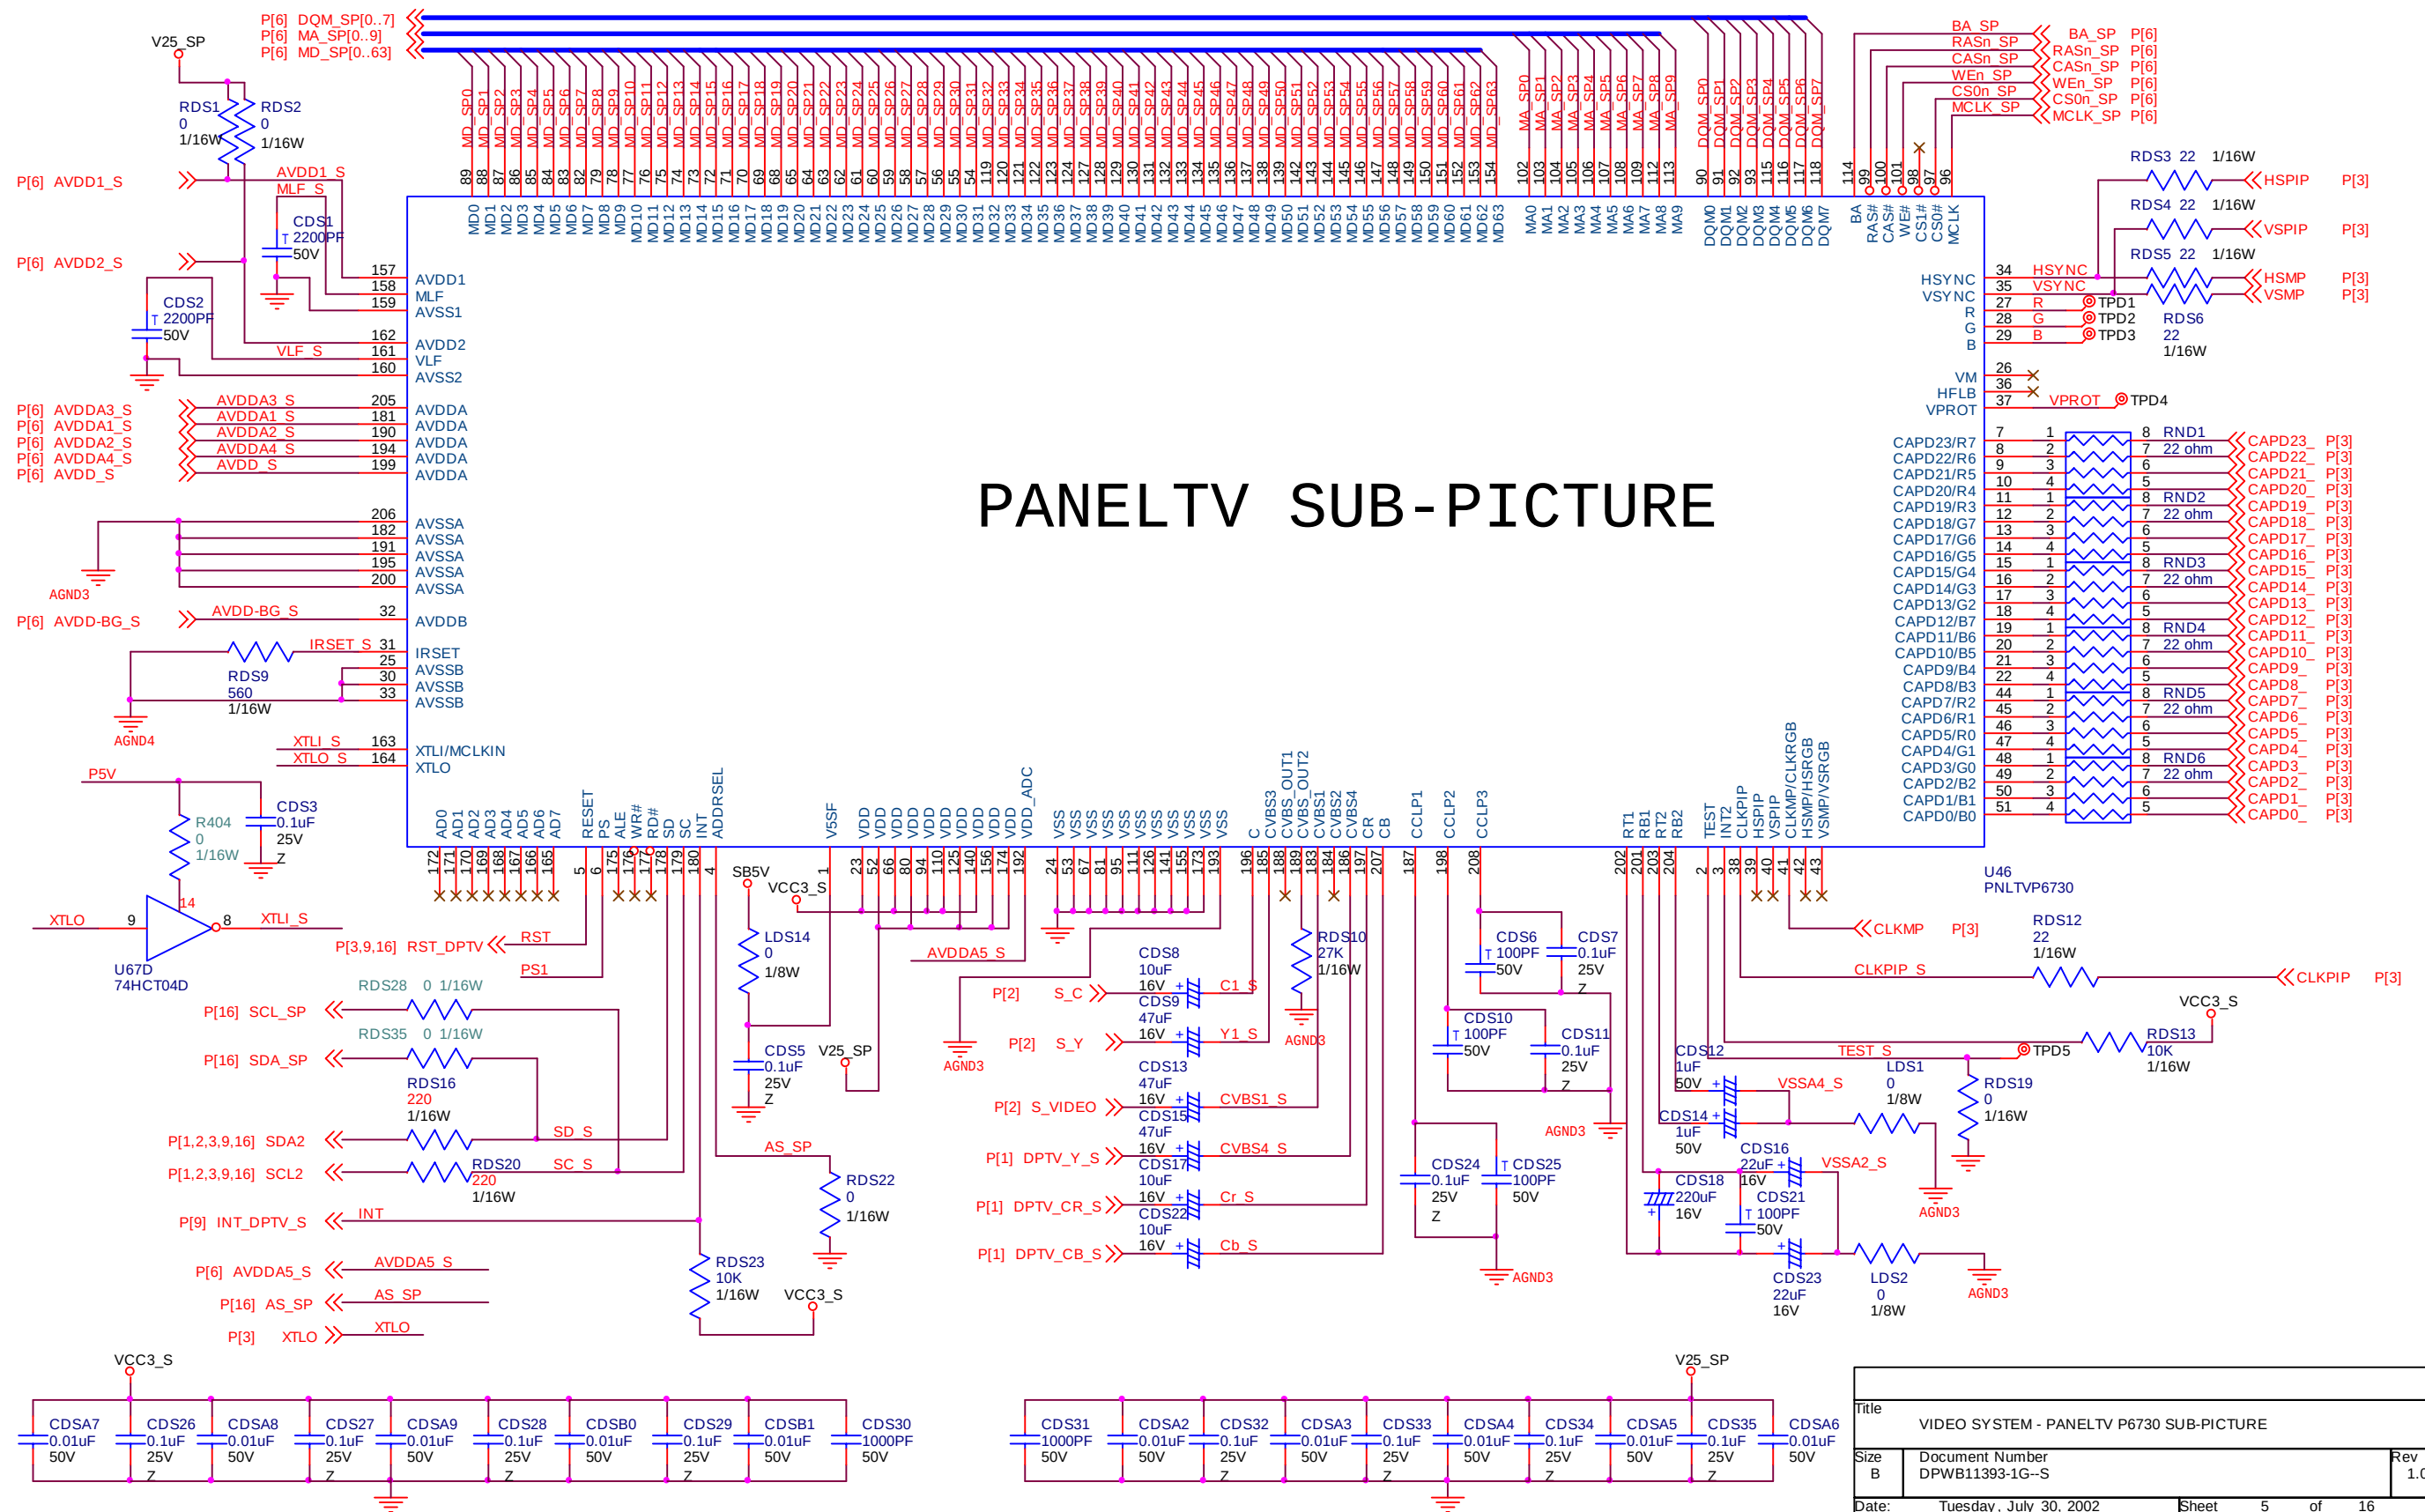


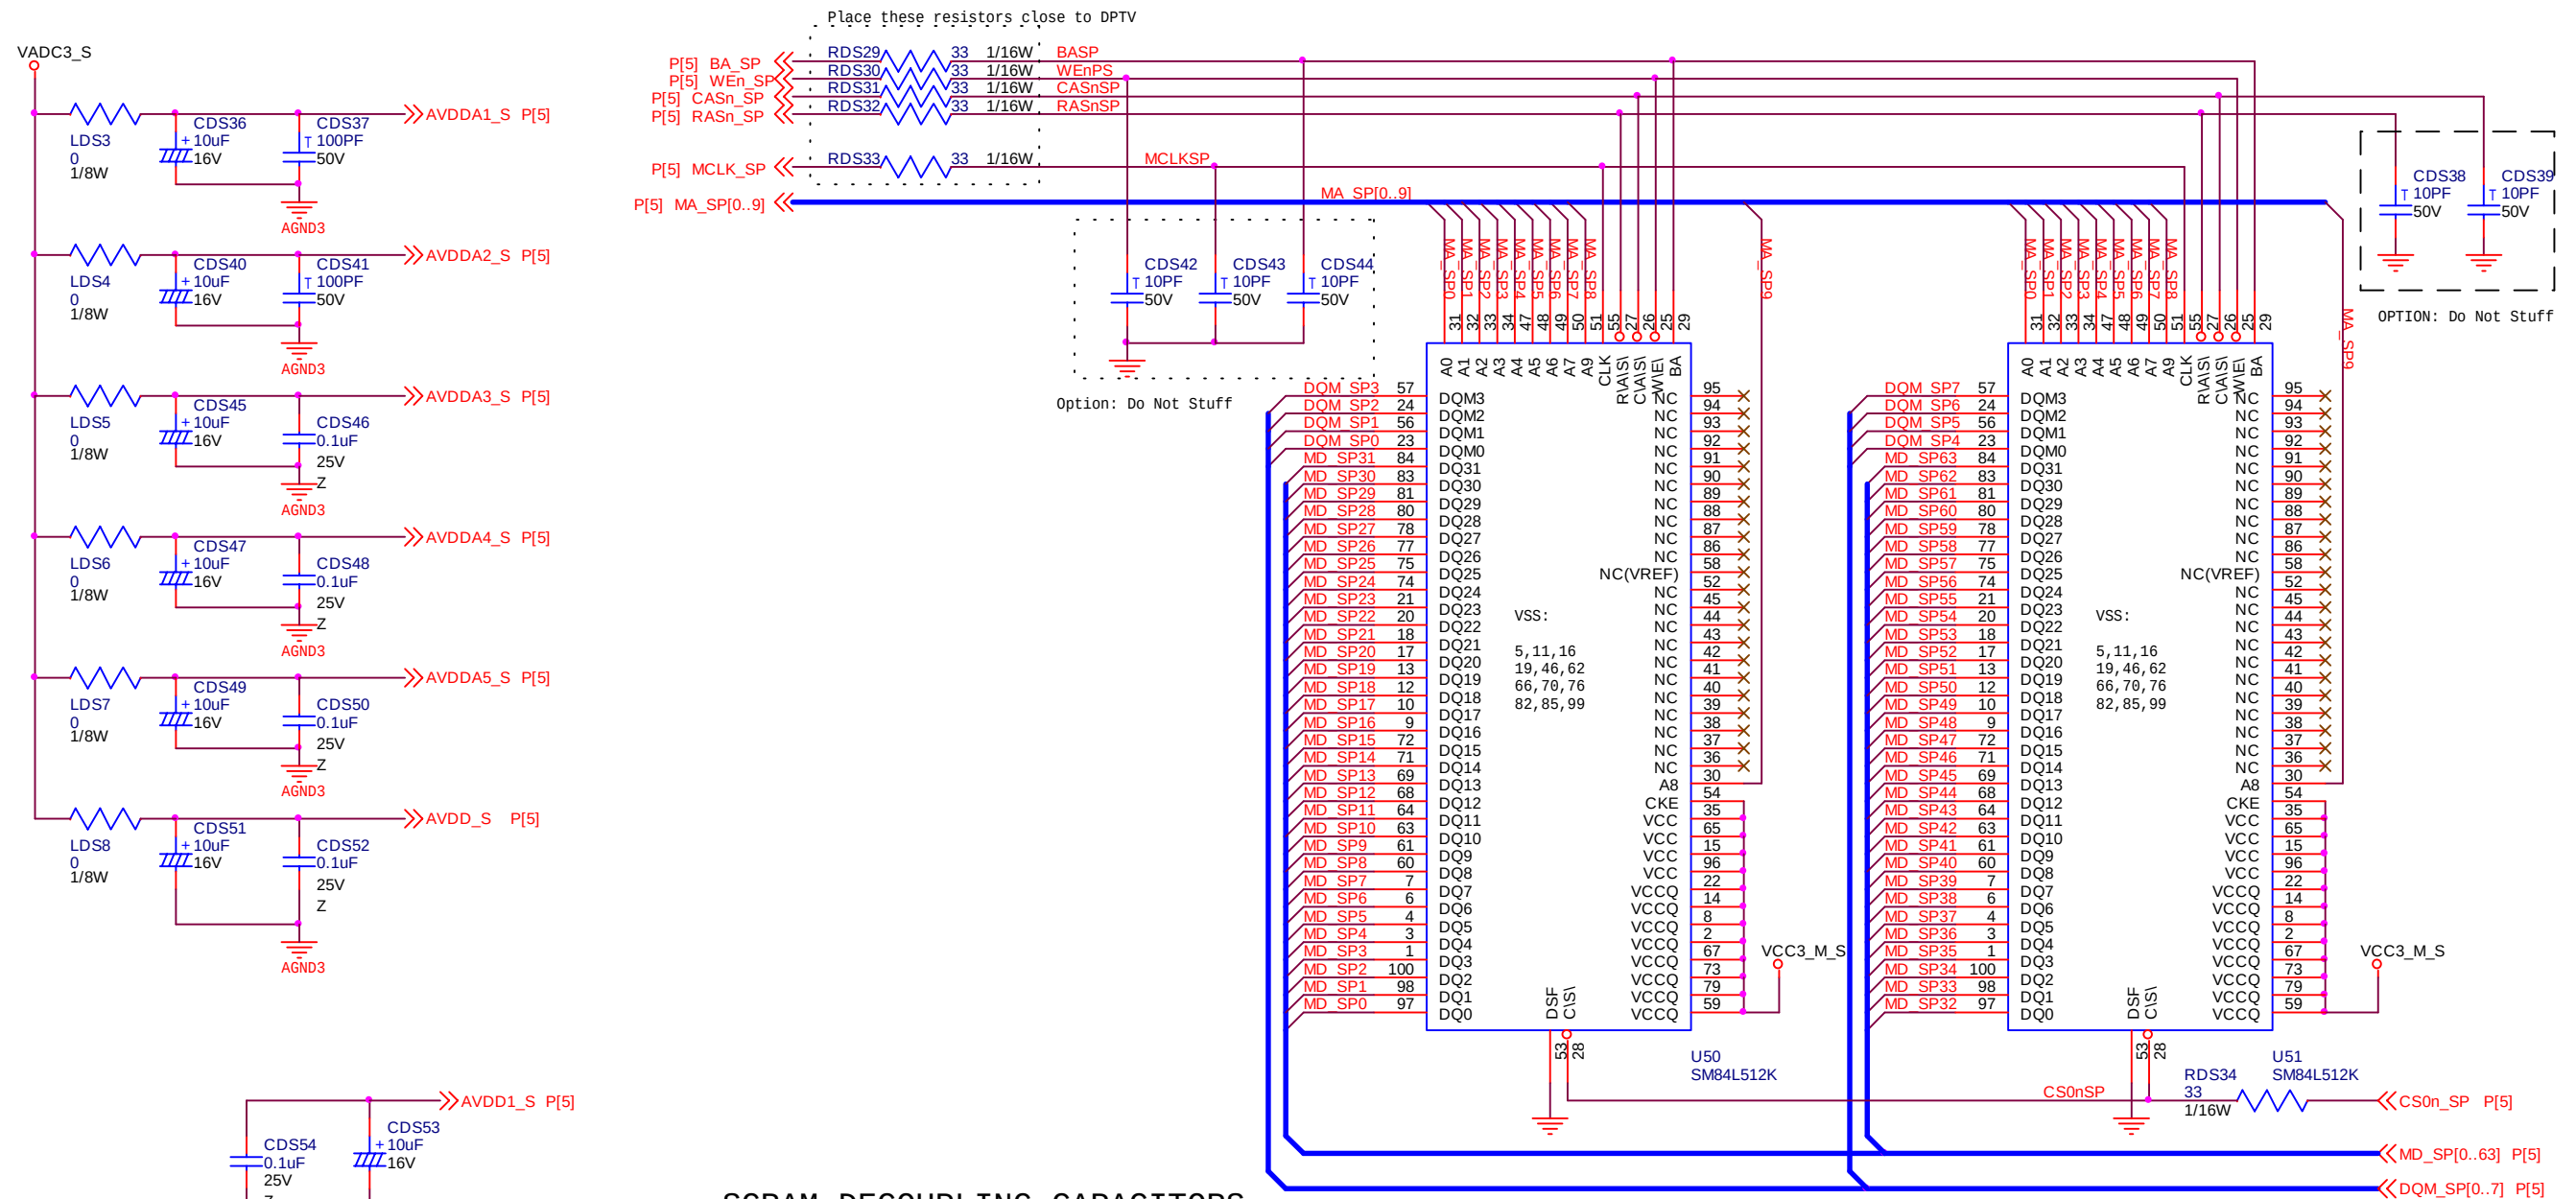


SGRAM DECOUPLING CAPACITORS

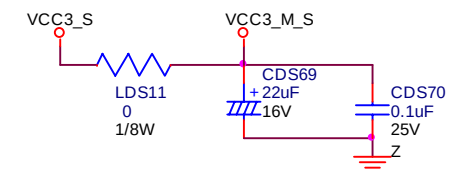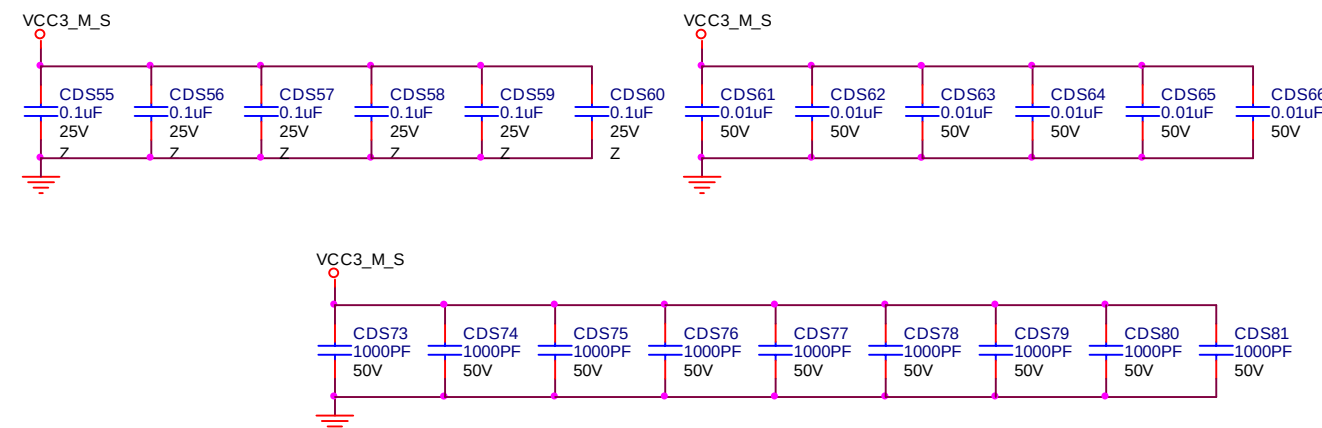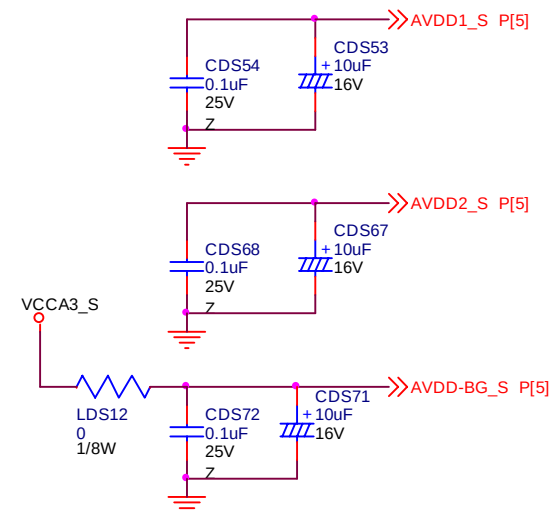


Title VIDEO SYSTEM - PANELTV SP SGRAM			
Size B	Document Number DPWB11393-1G--S		Rev 1.0
Date:	Tuesday, July 30, 2002	Sheet	6 of 16

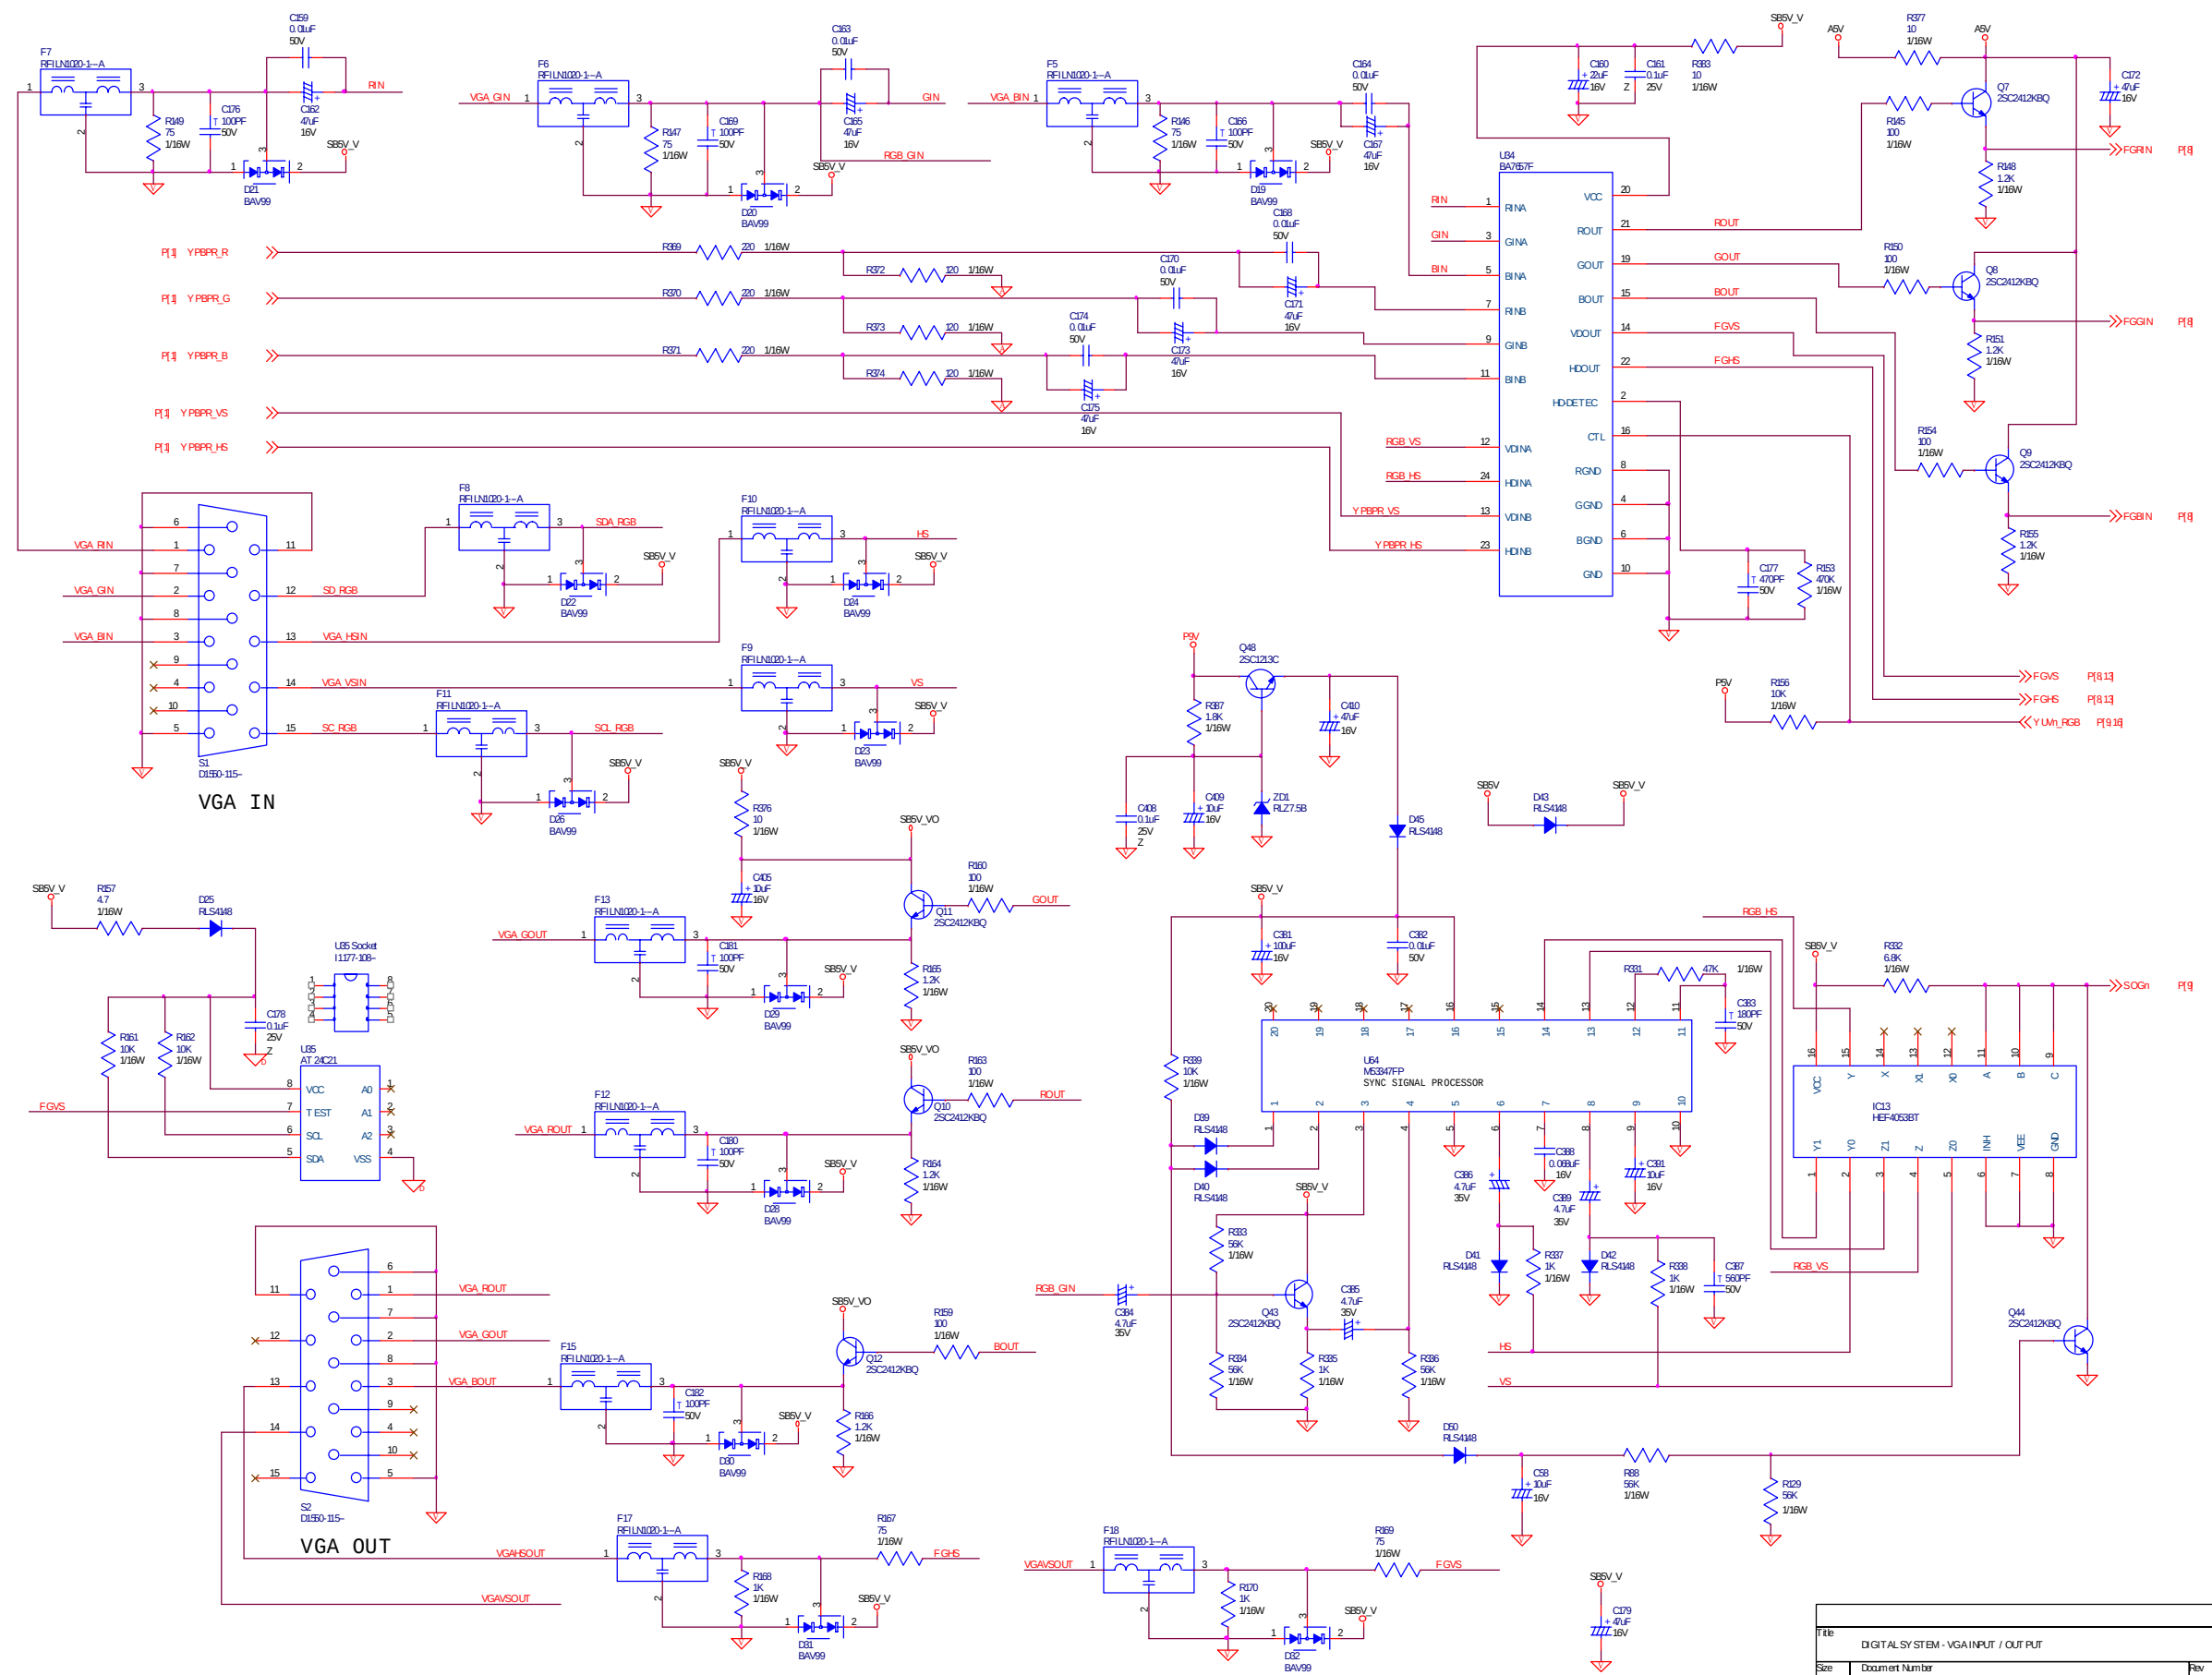


Title			
DIGITAL SYSTEM - VGA INPUT / OUTPUT			
Size	Document Number		Rev
C	DPW61138B-1G-S		1.0
Date	Tuesday, July 30, 2002	Sheet	7 of 16

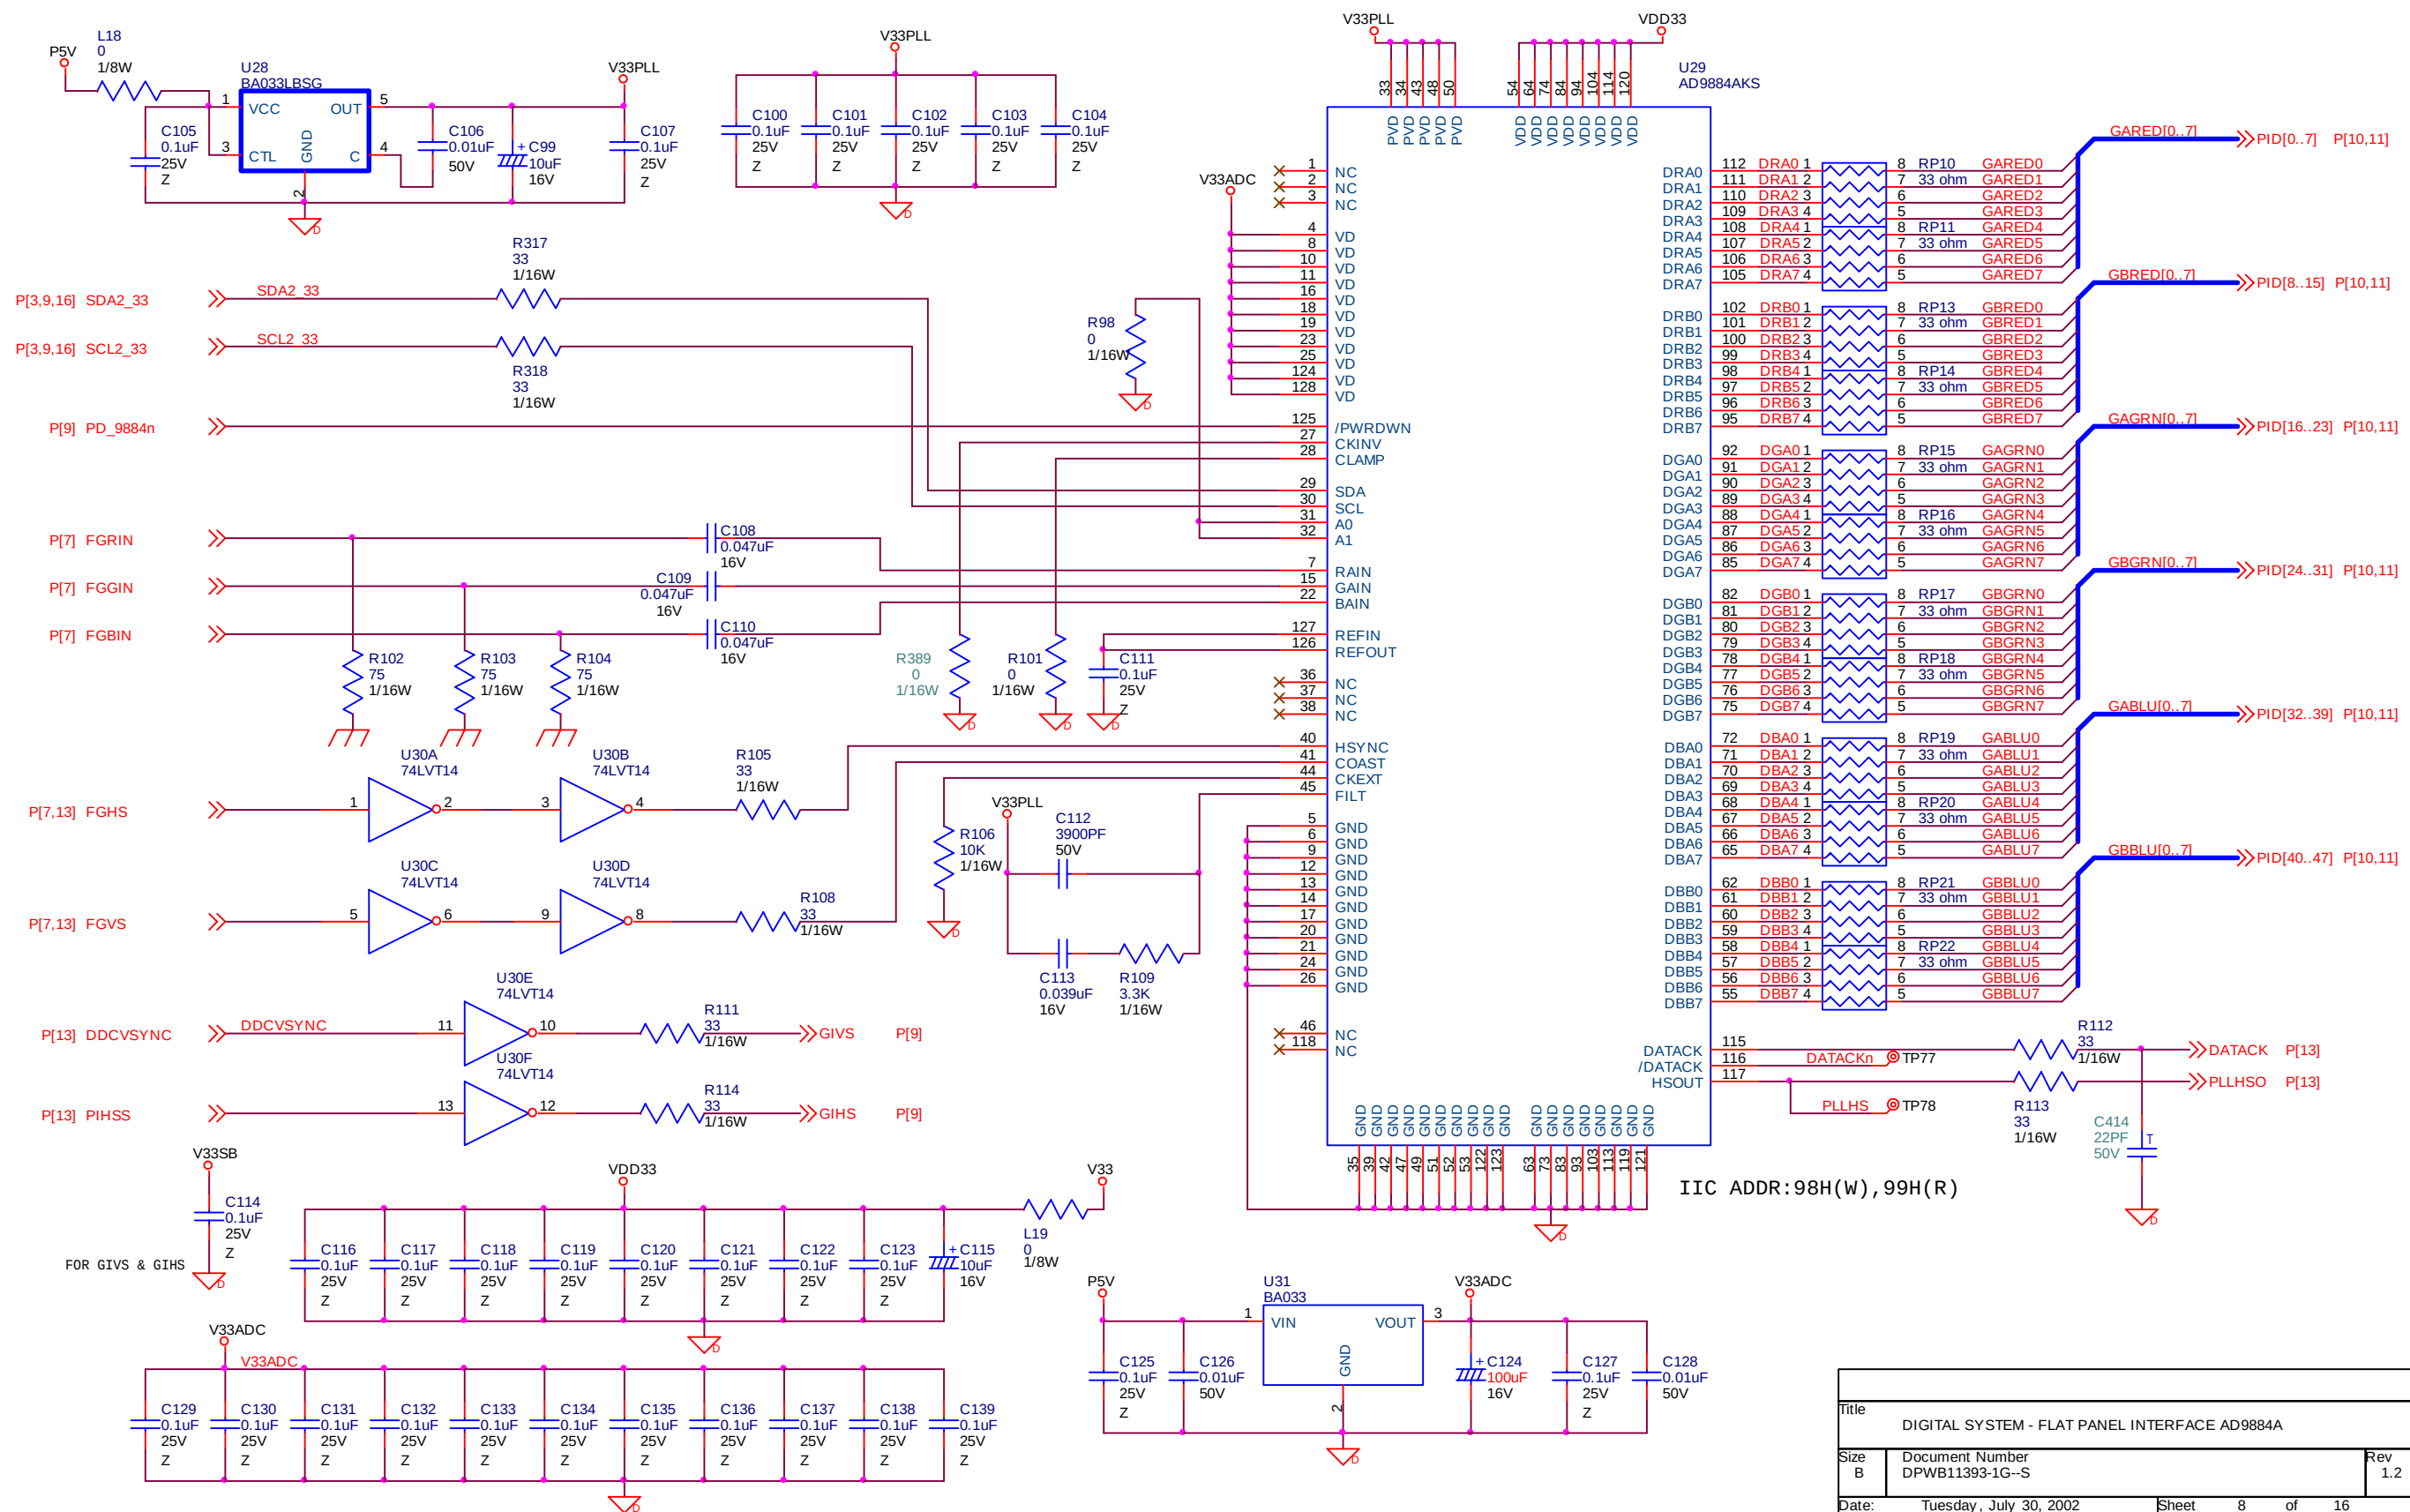

Title		
DIGITAL SYSTEM - FLAT PANEL INTERFACE AD9884A		
Size B	Document Number	Rev 1.2
Date:	Tuesday, July 30, 2002	Sheet 8 of 16

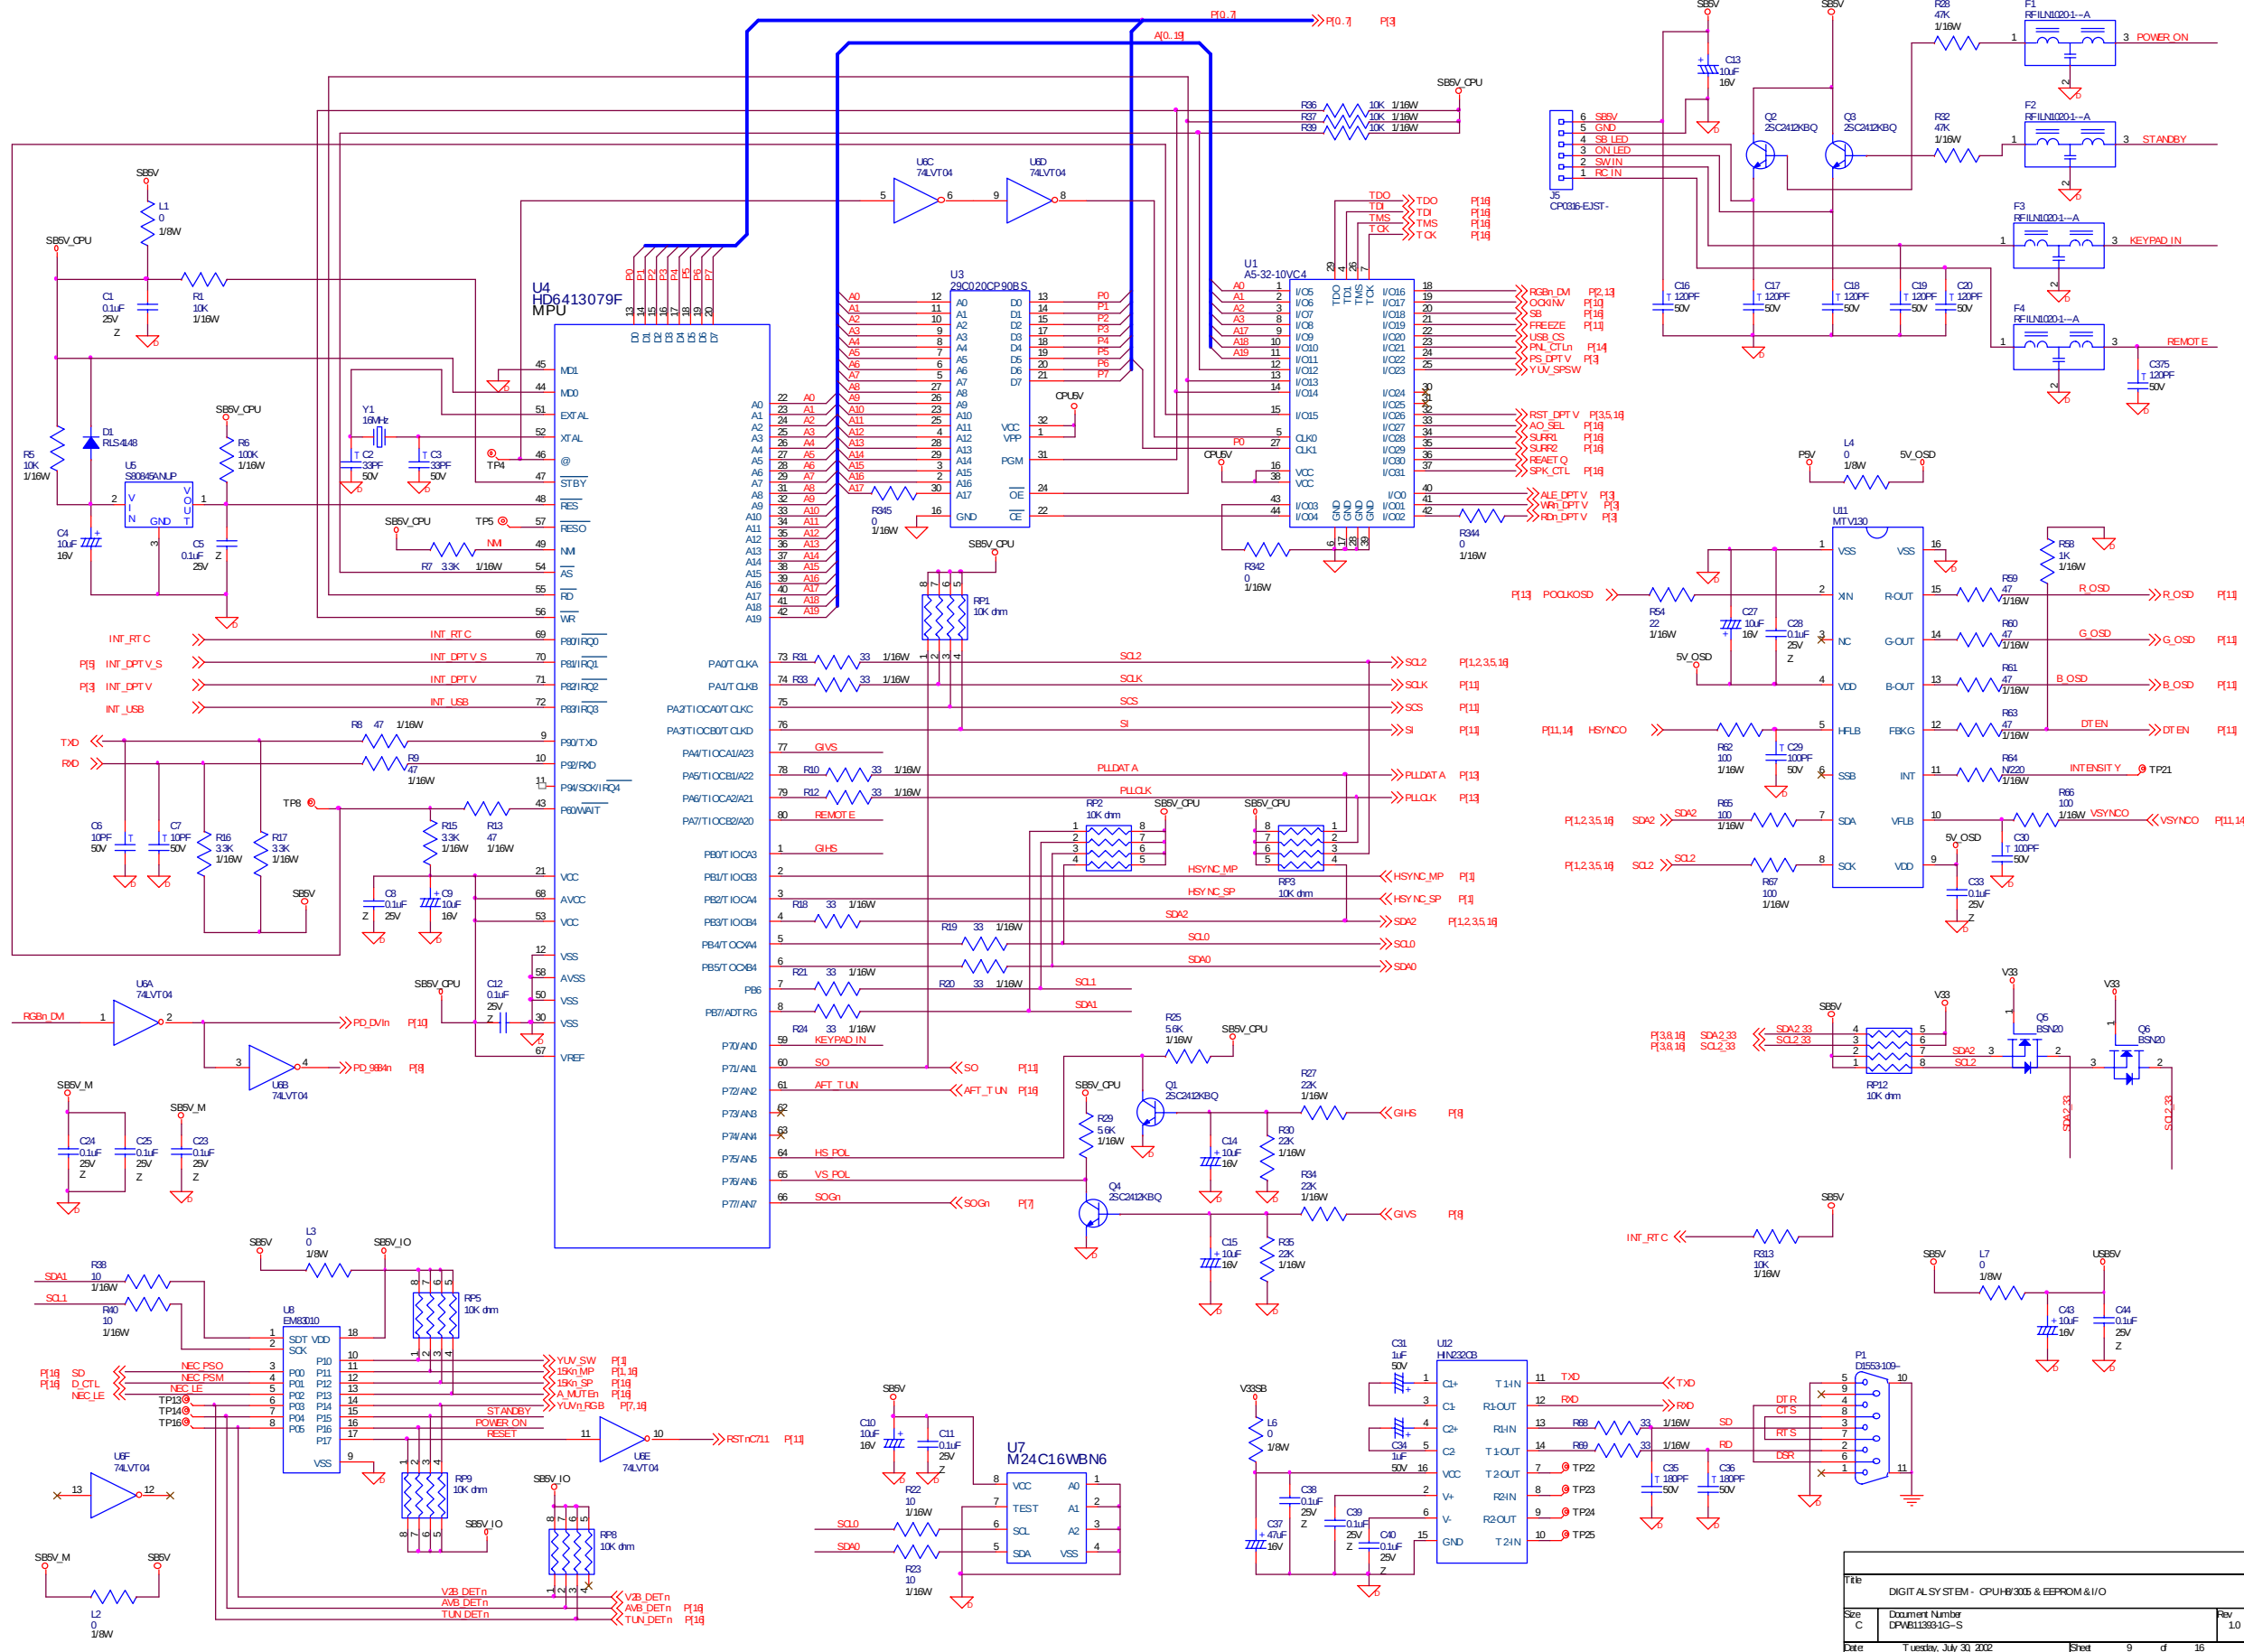


Title			DIGITAL SYSTEM - CPU/H9305 & EEPROM I/O
Doc	Document Number	Rev	1.0
Date	Tuesday, July 30, 2002	Sheet	9 of 16

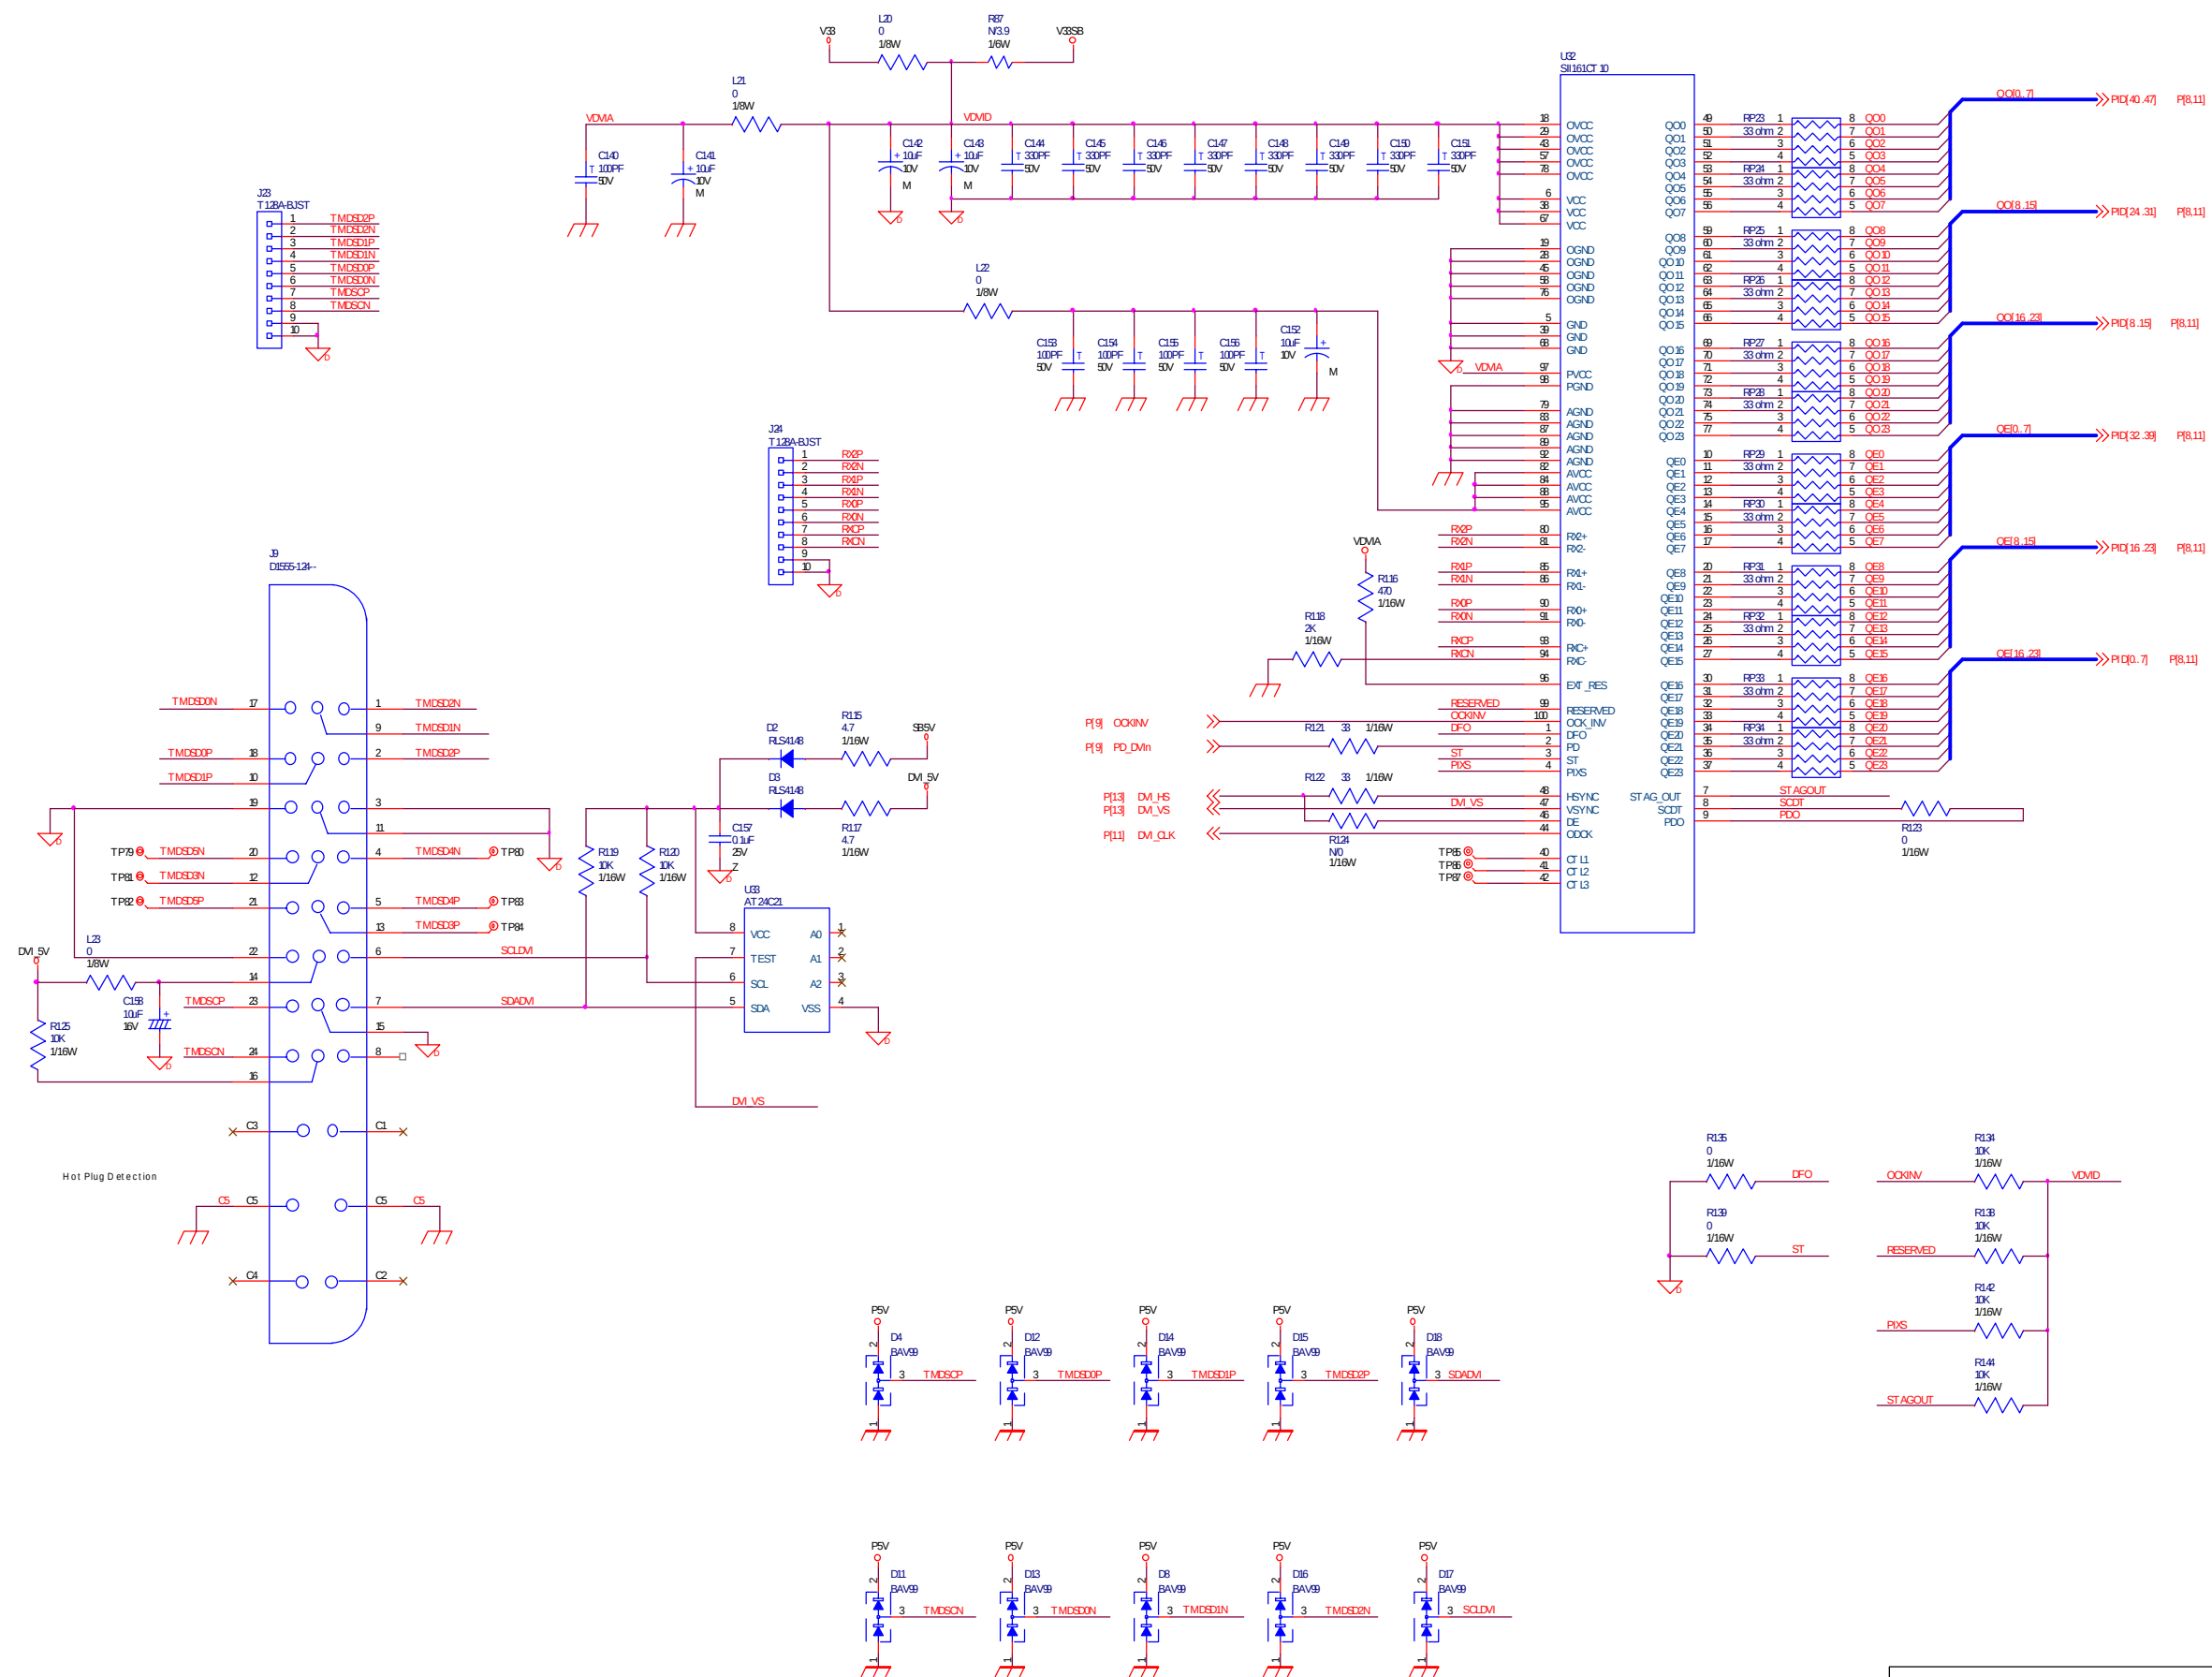


Title			
DIGITAL SYSTEM - Panelink RECEIVER DM SI 16L			
Size	Document Number	Rev	
C	DPW61136-1G-S	1.0	
Date	Tuesday, July 30, 2002	Sheet	10 of 16

SCHEMATIC DIAGRAM



VER1.0

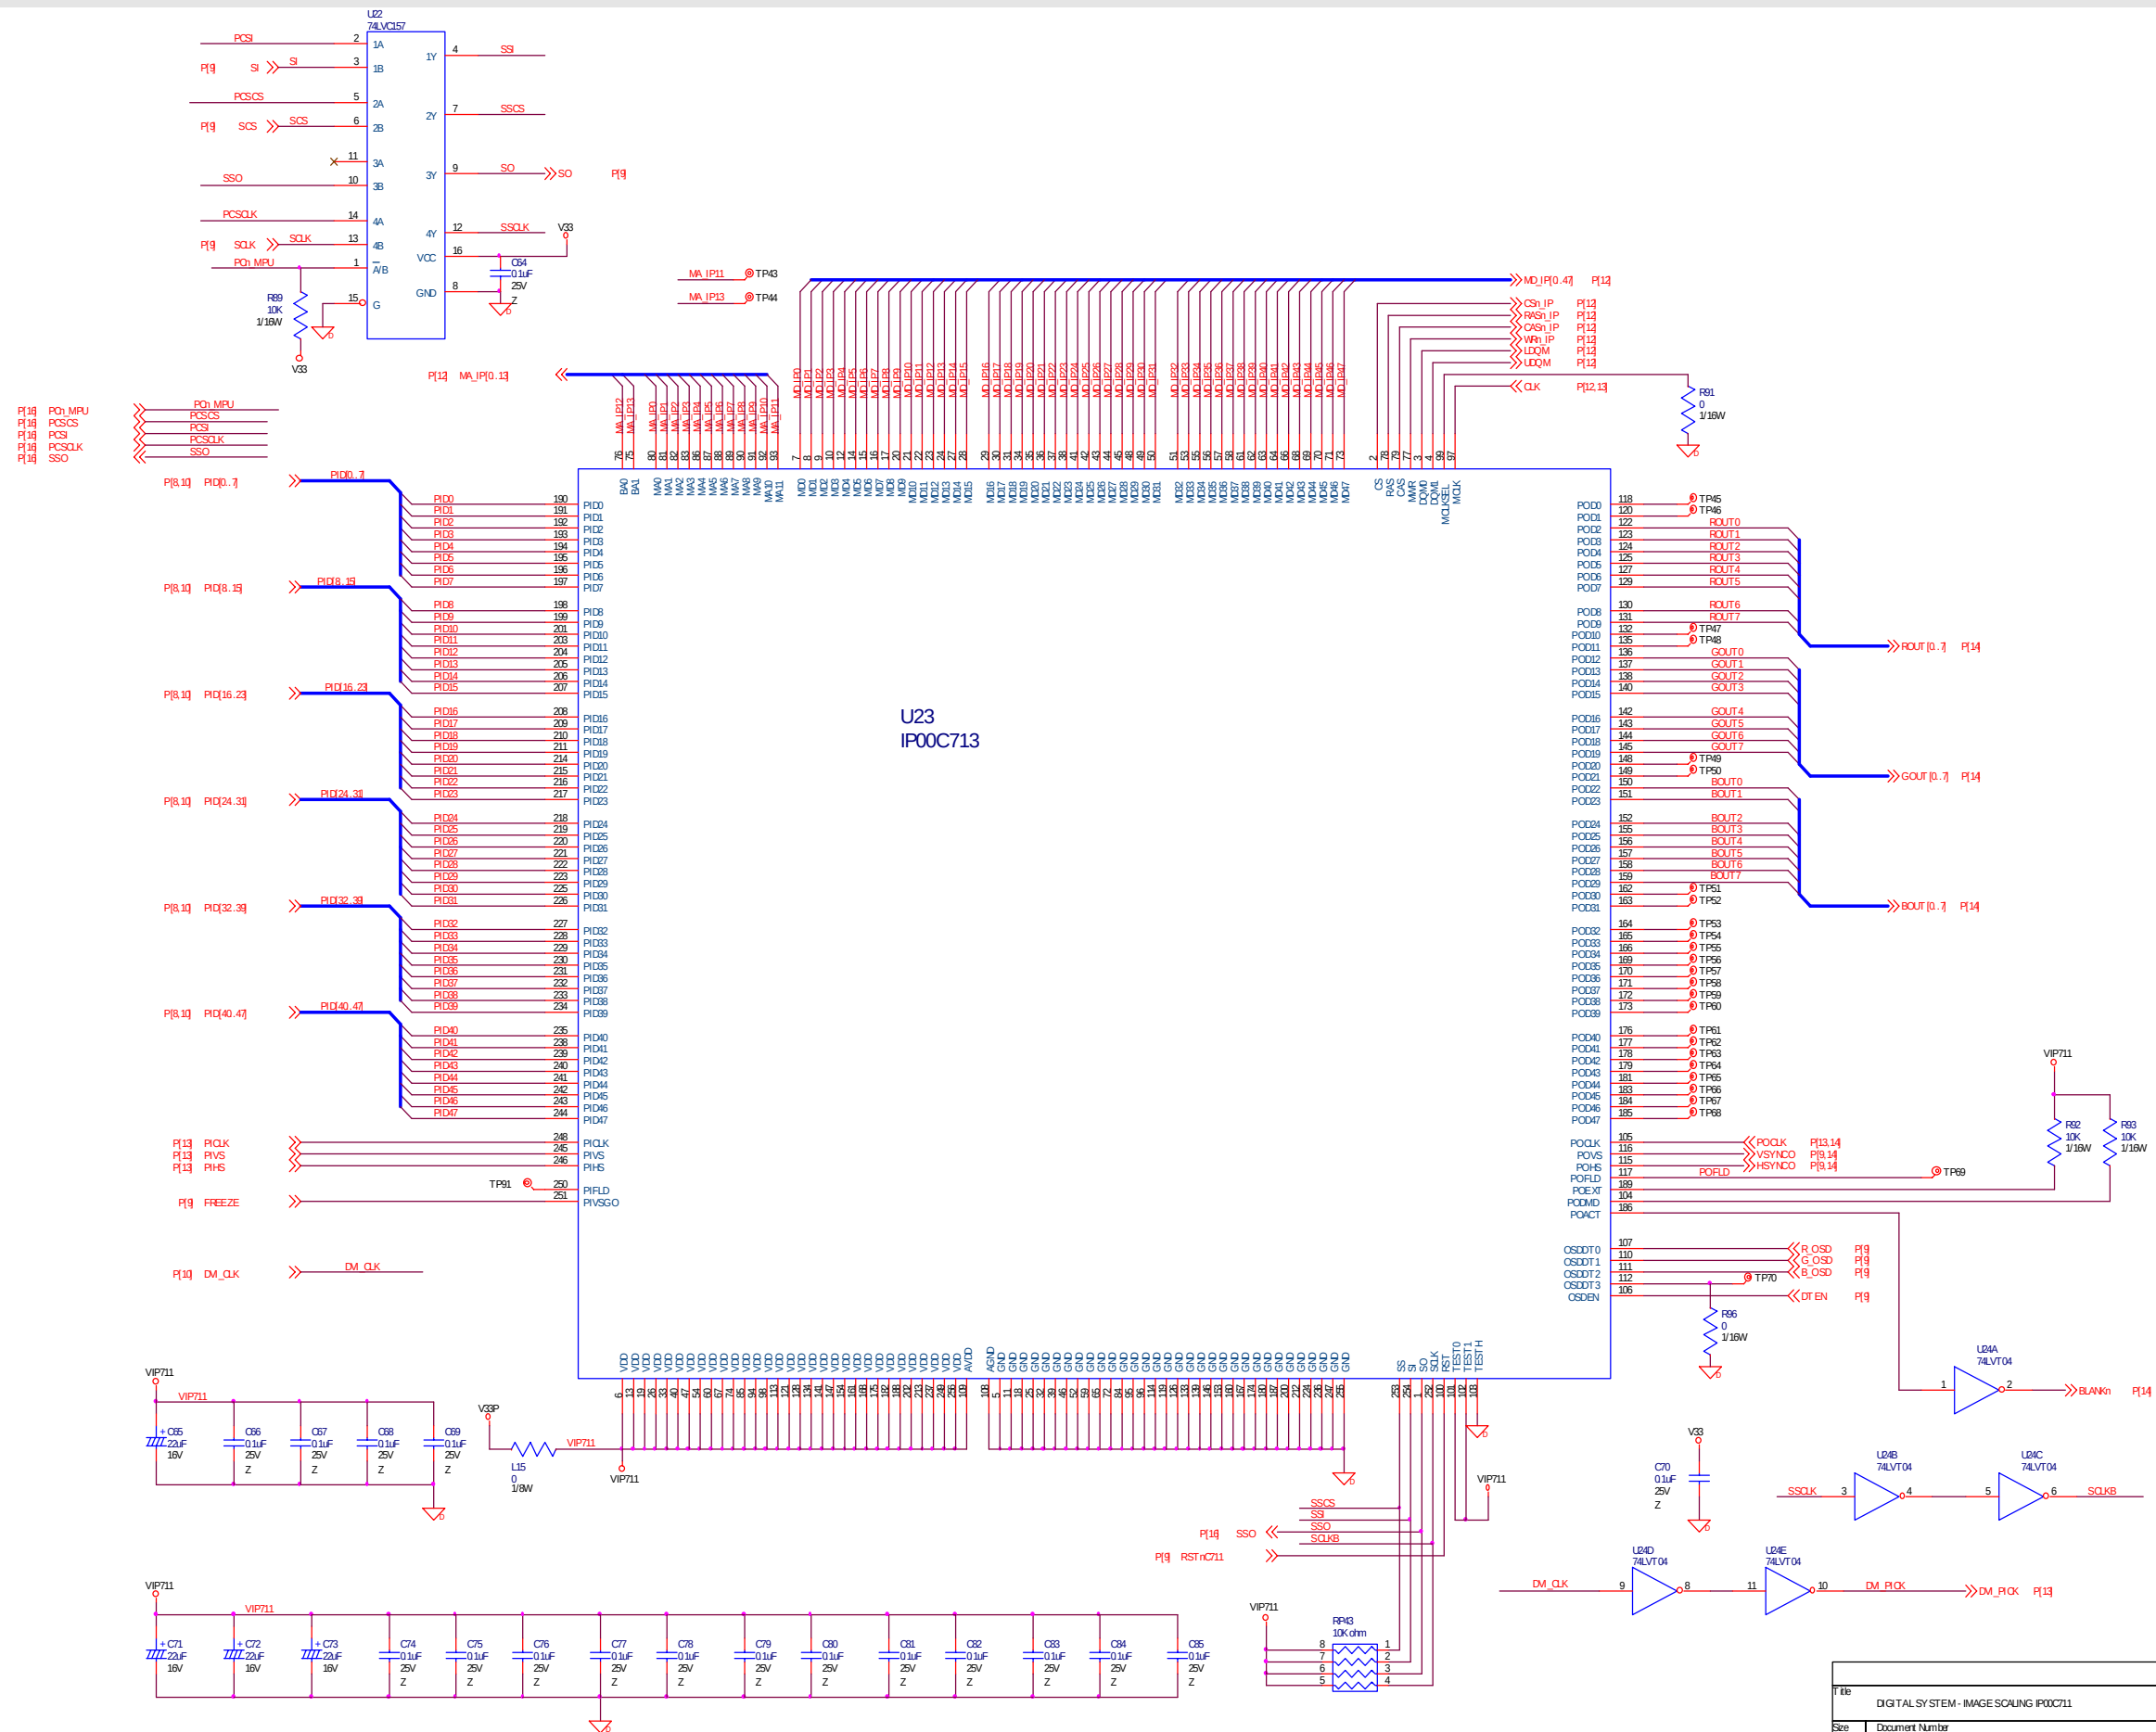


Title			
DIGITAL SYSTEM - IMAGE SCALING IP00C711			
Size C	Document Number DPWB11393-1G-S		Rev 1.0
Date	Tuesday, July 30, 2002	Sheet	11 of 16

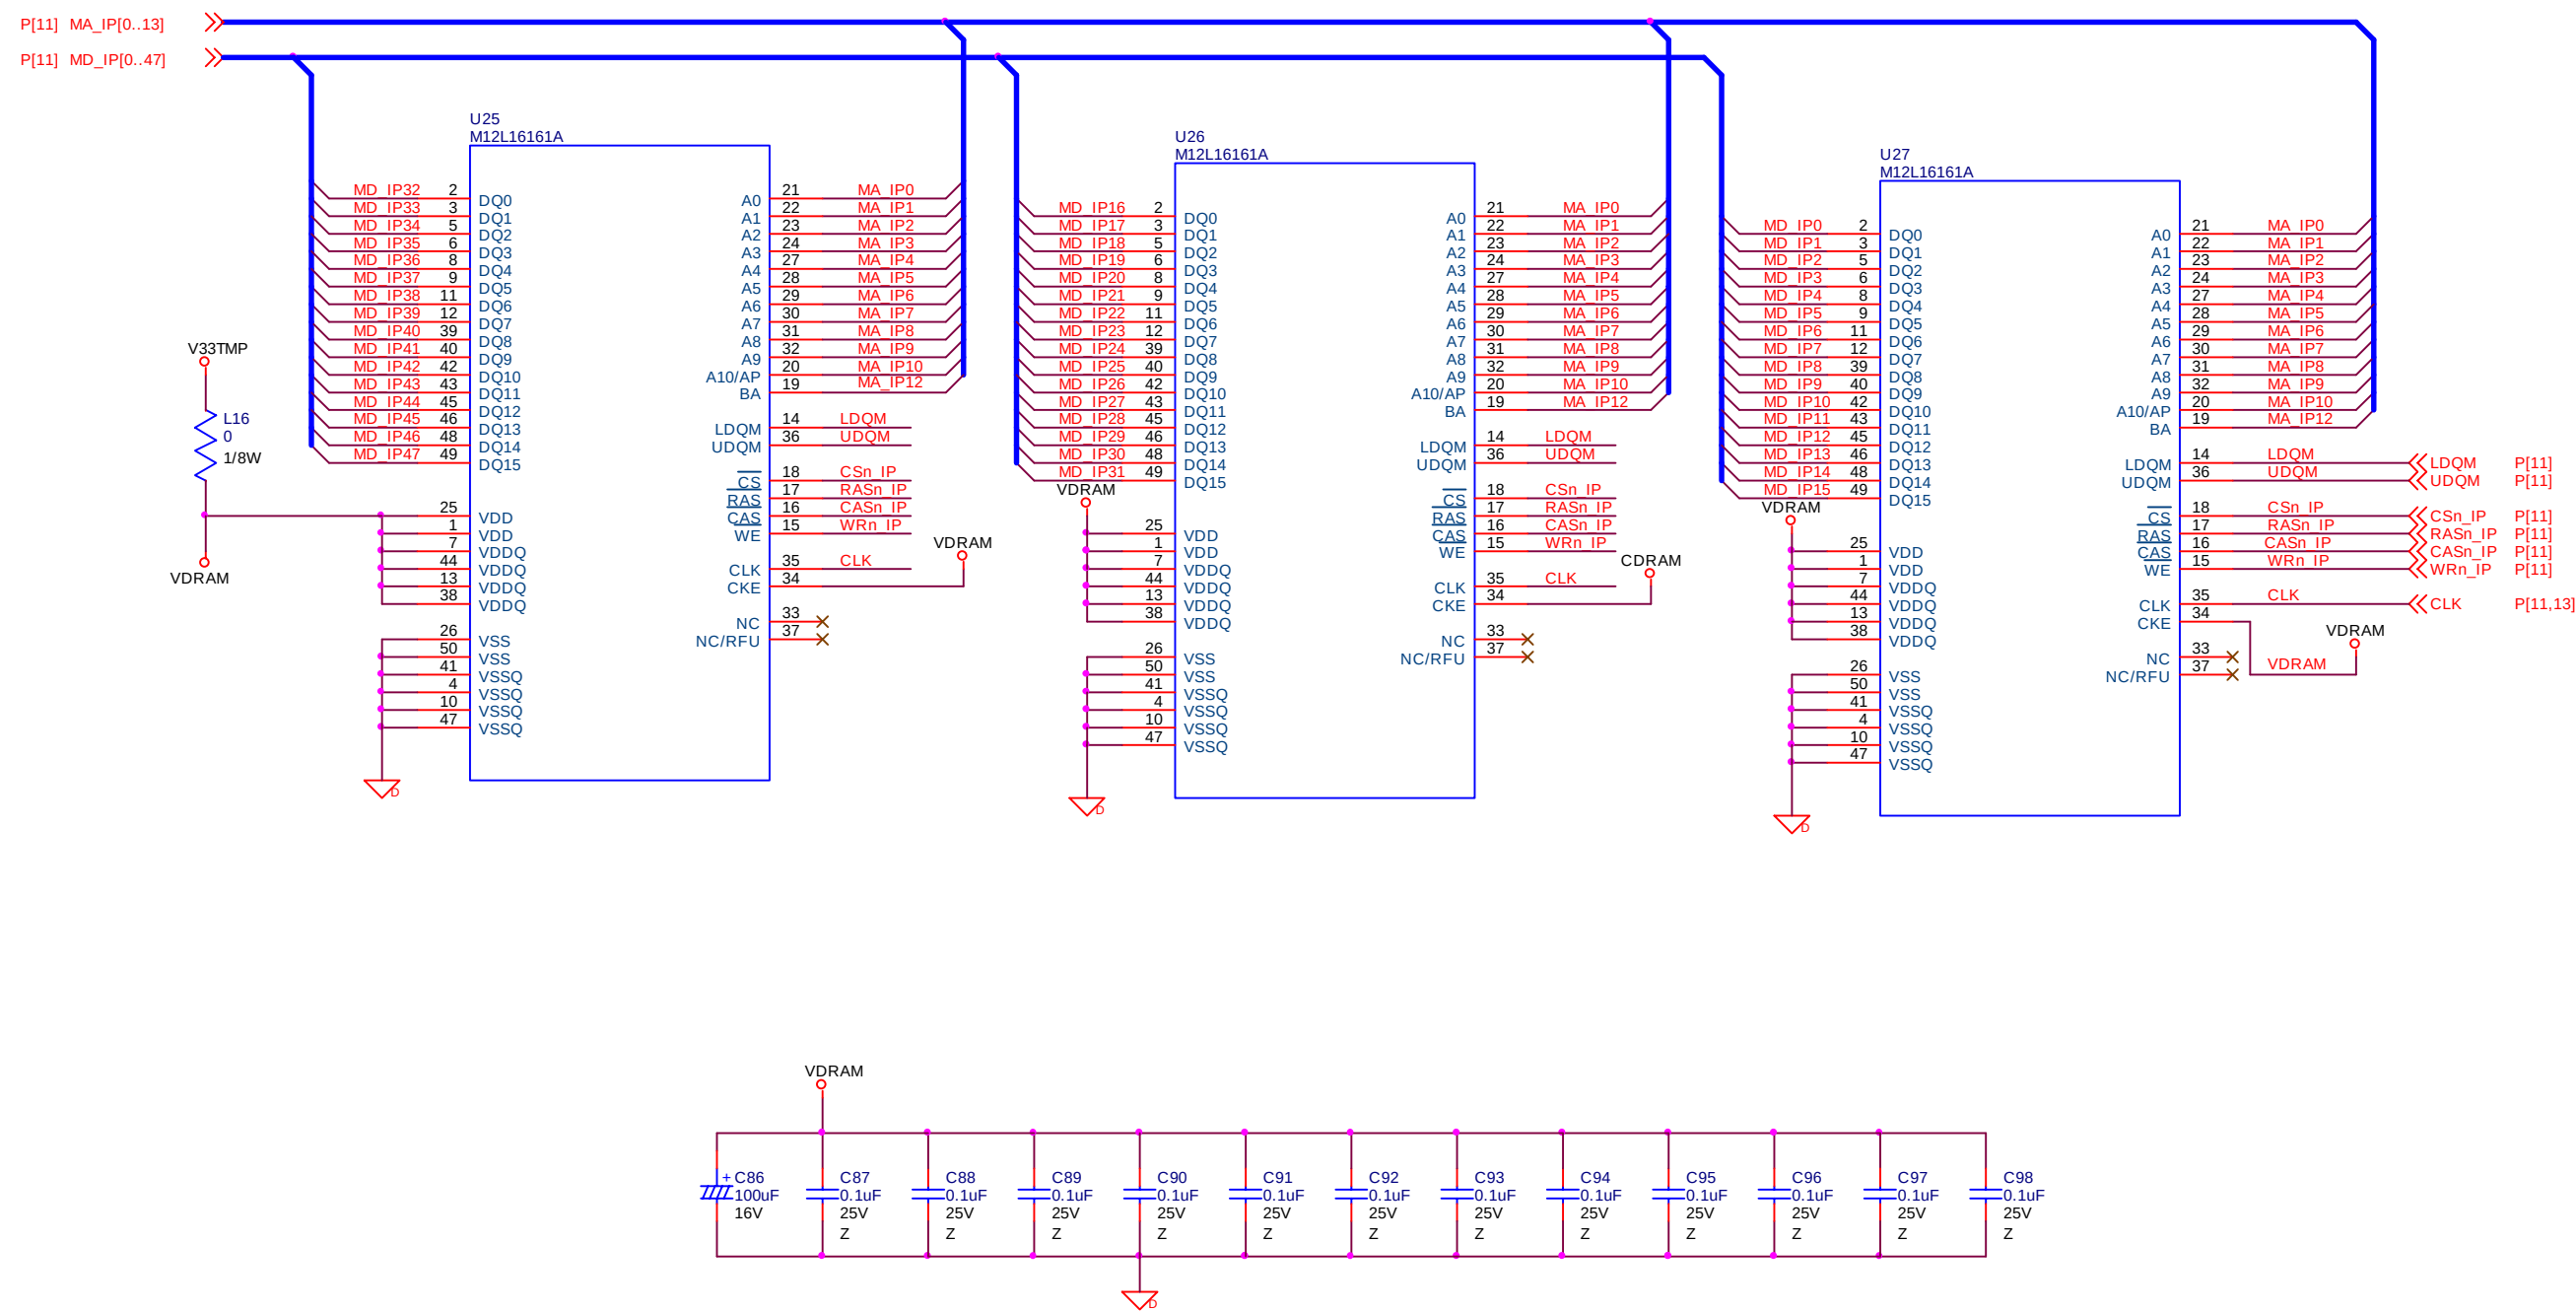


Title		
DIGITAL SYSTEM - IMAGE SDRAM 16M		
Size	Document Number	Rev
B	DPWB11393-1G-S	1.2
Date:	Tuesday, July 30, 2002	Sheet 12 of 16

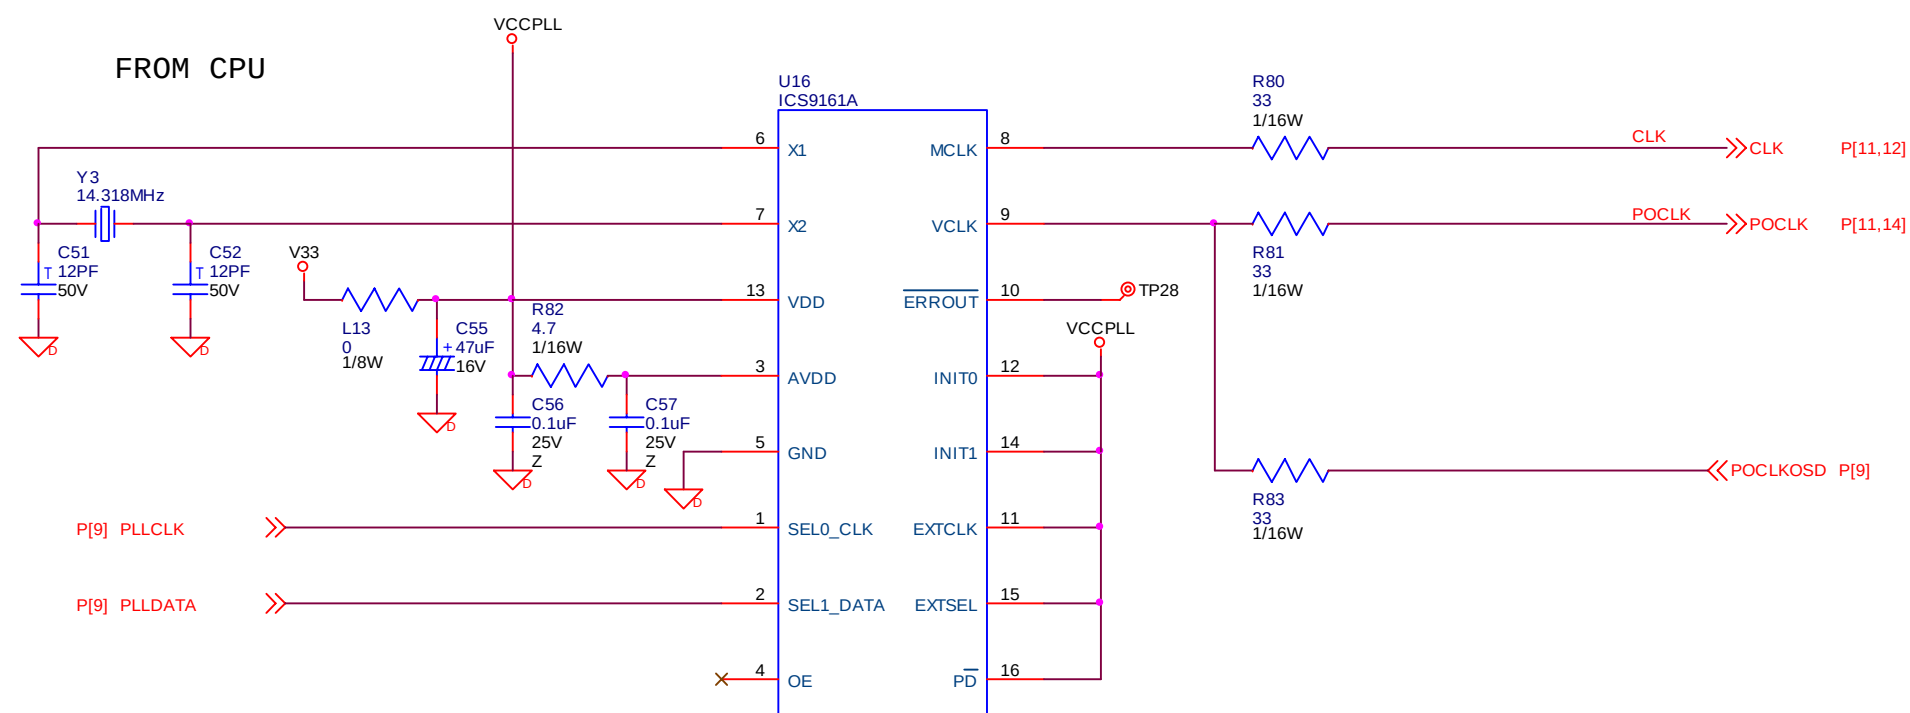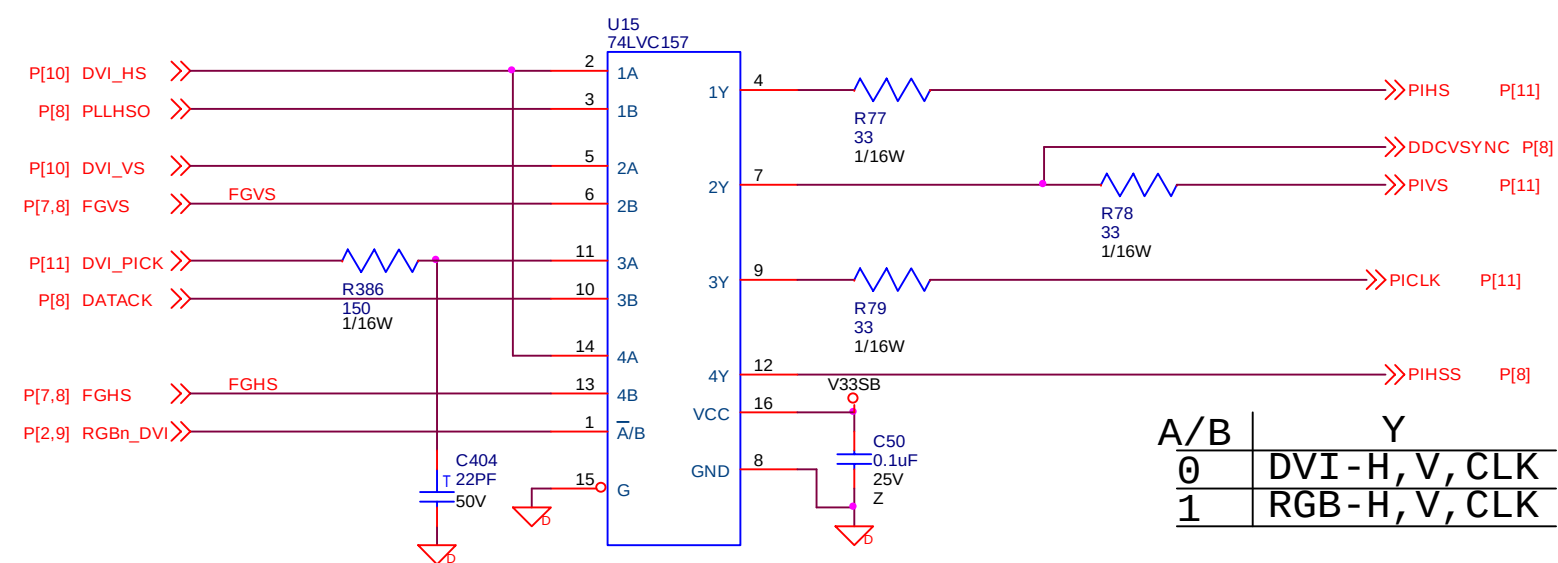


Title		
DIGITAL SYSTEM - HSYN SW & CLOCK GEN.		
Size	Document Number	Rev
B	DPWB11393-1G--S	1.0
Date:	Tuesday, July 30, 2002	Sheet 13 of 16

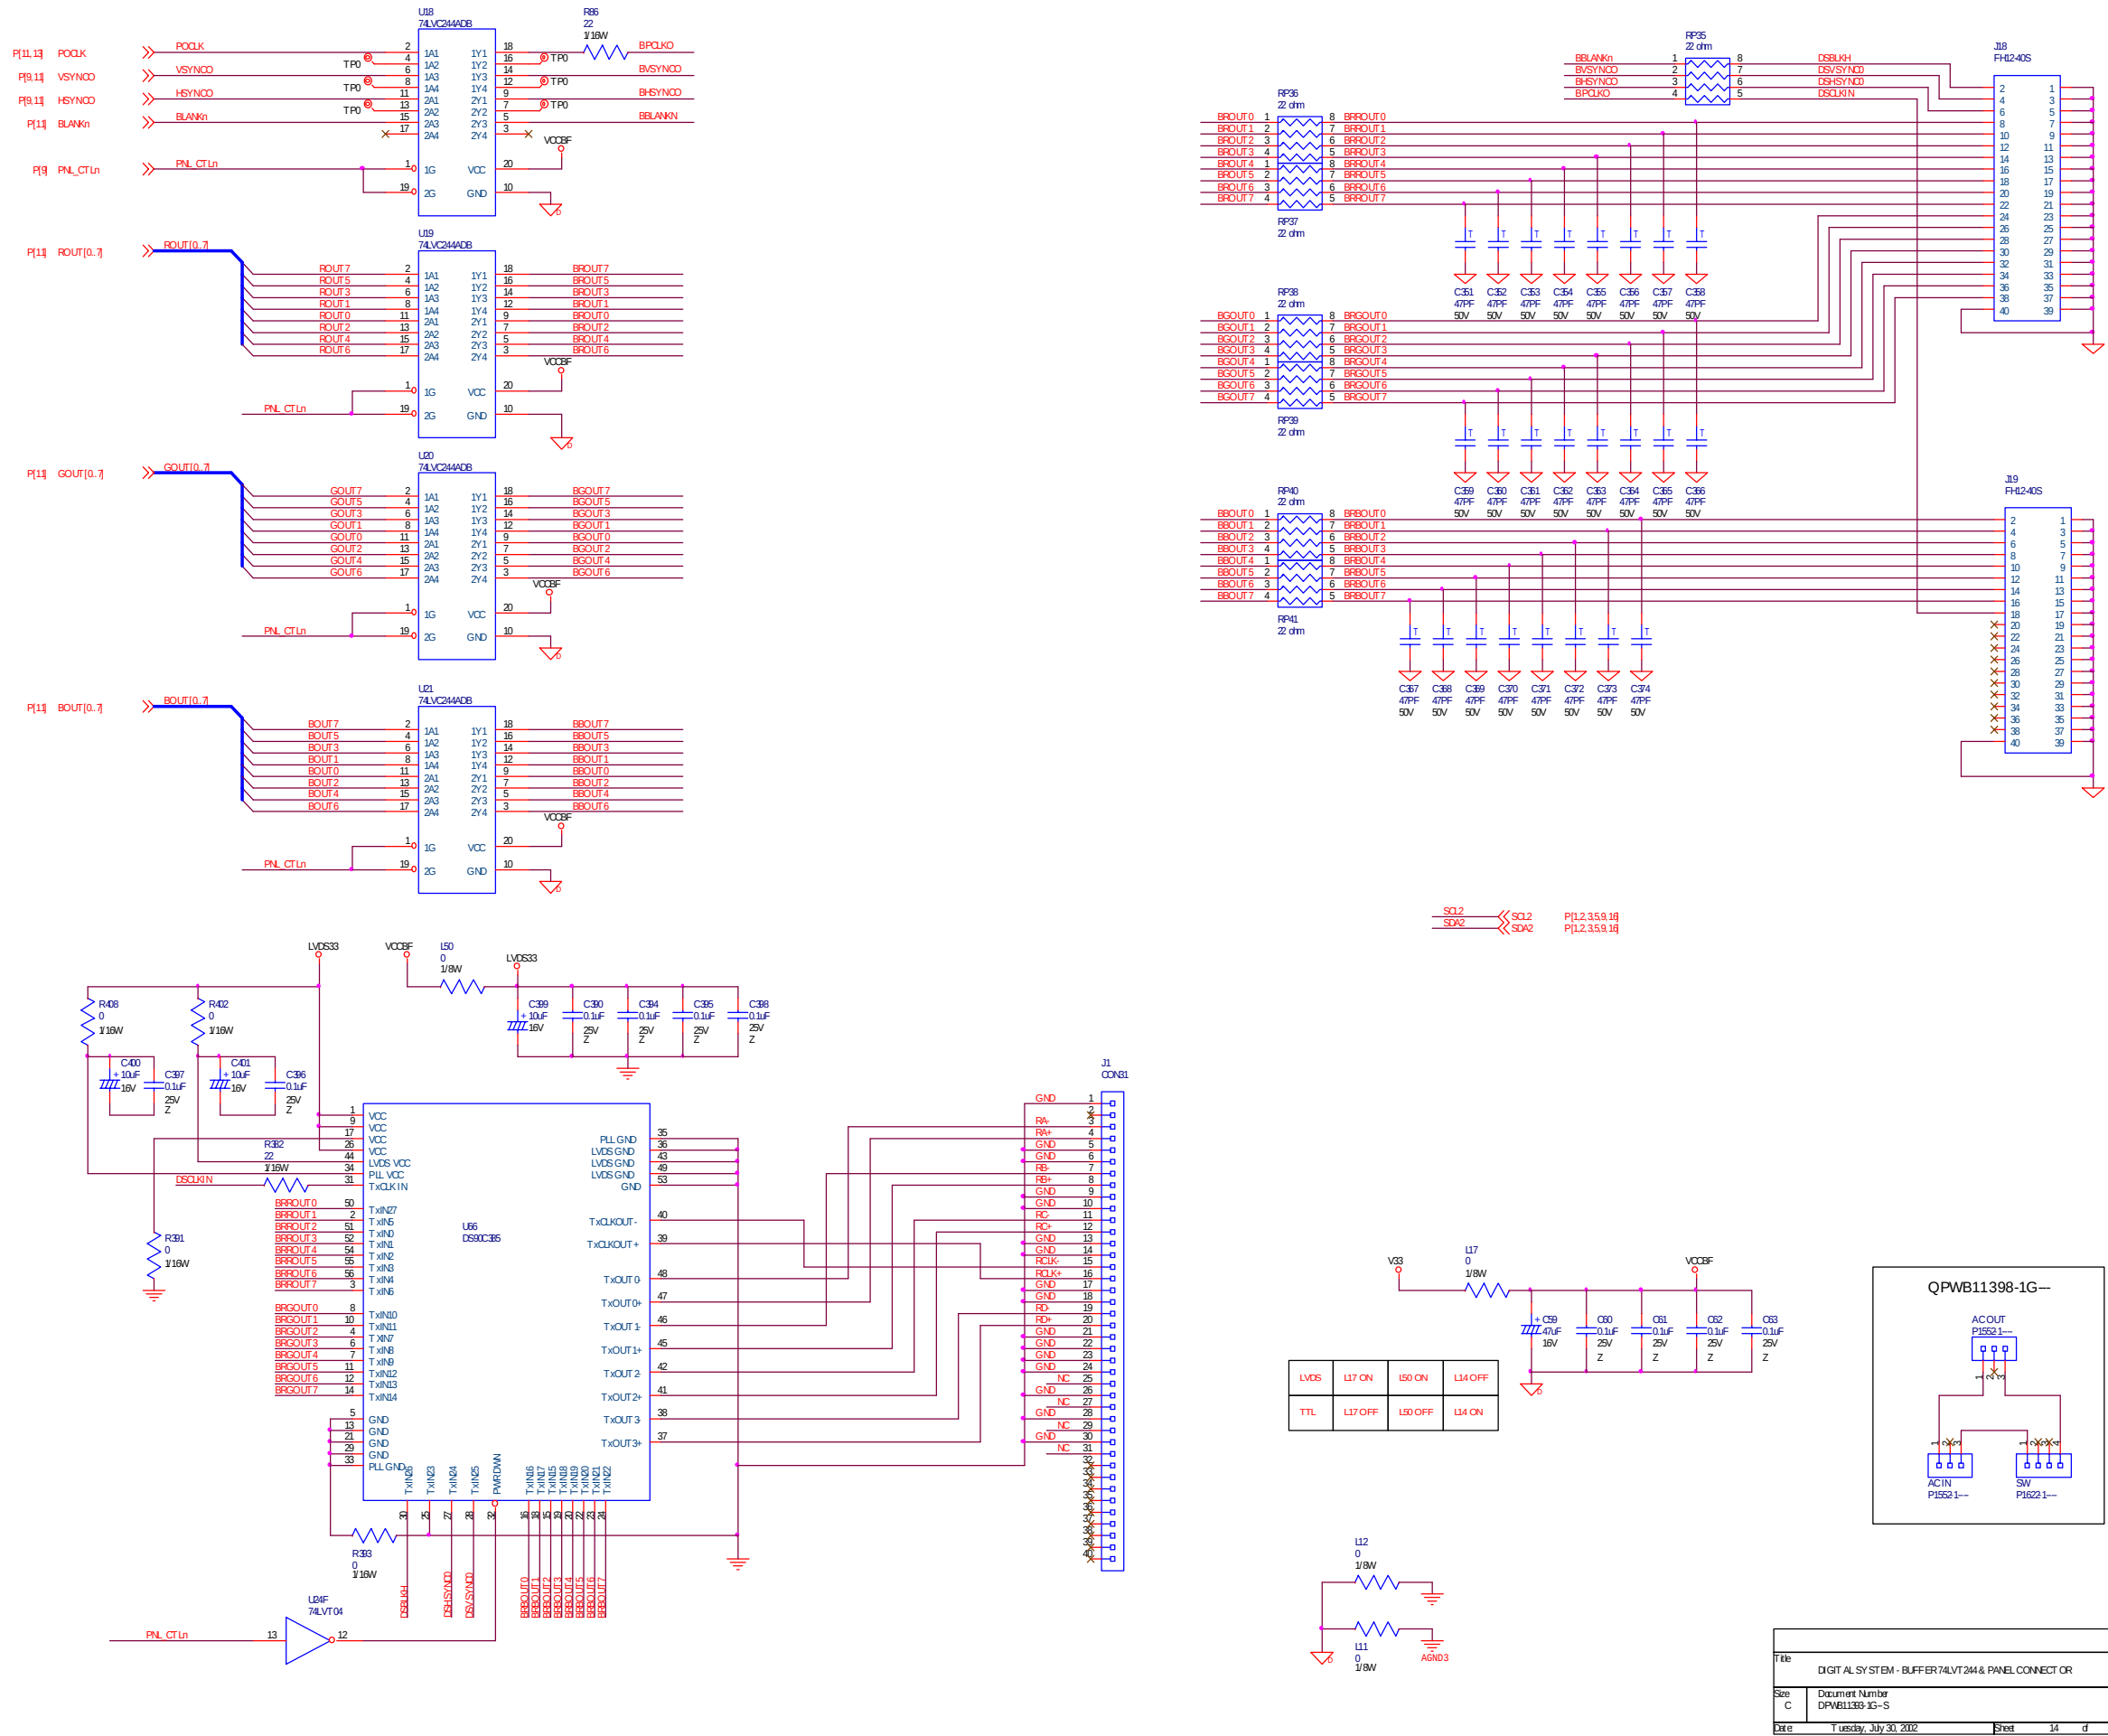


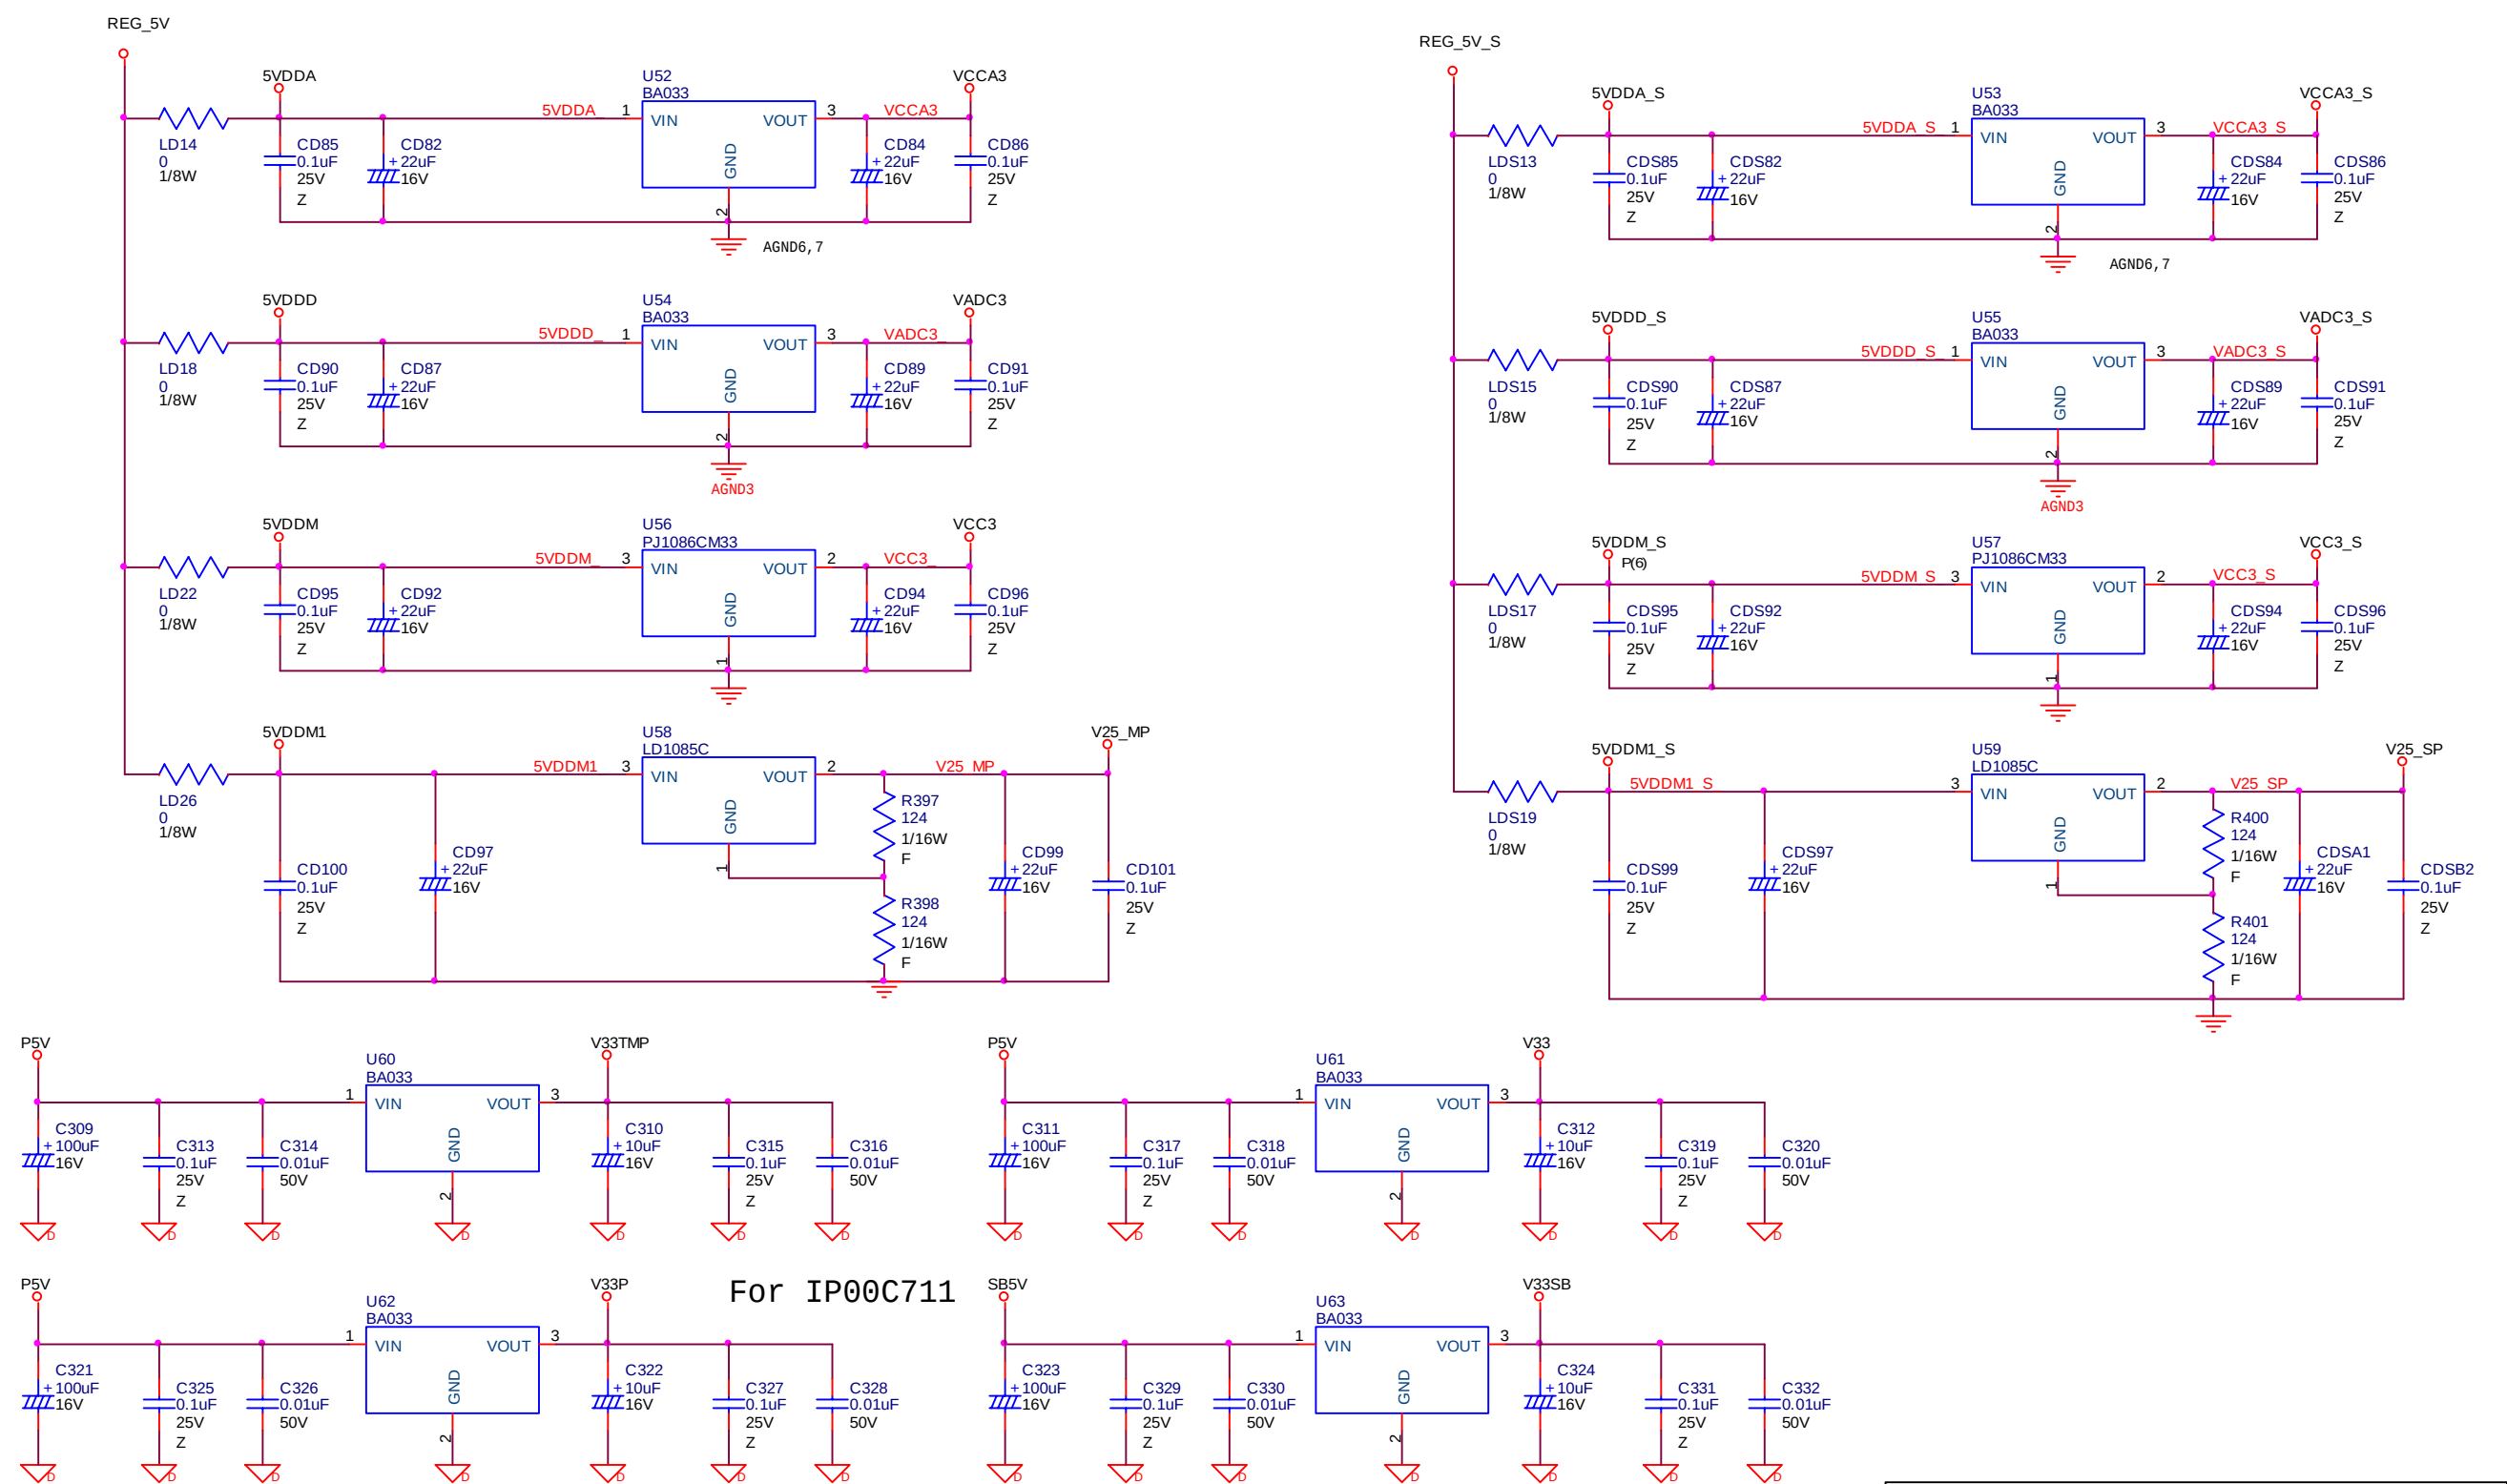


Title		
VIDEO SYSTEM - REGULATOR POWER		
Size	Document Number	Rev
B	DPWB11393-1G--S	1.0
Date:	Monday, July 29, 2002	Sheet 15 of 16




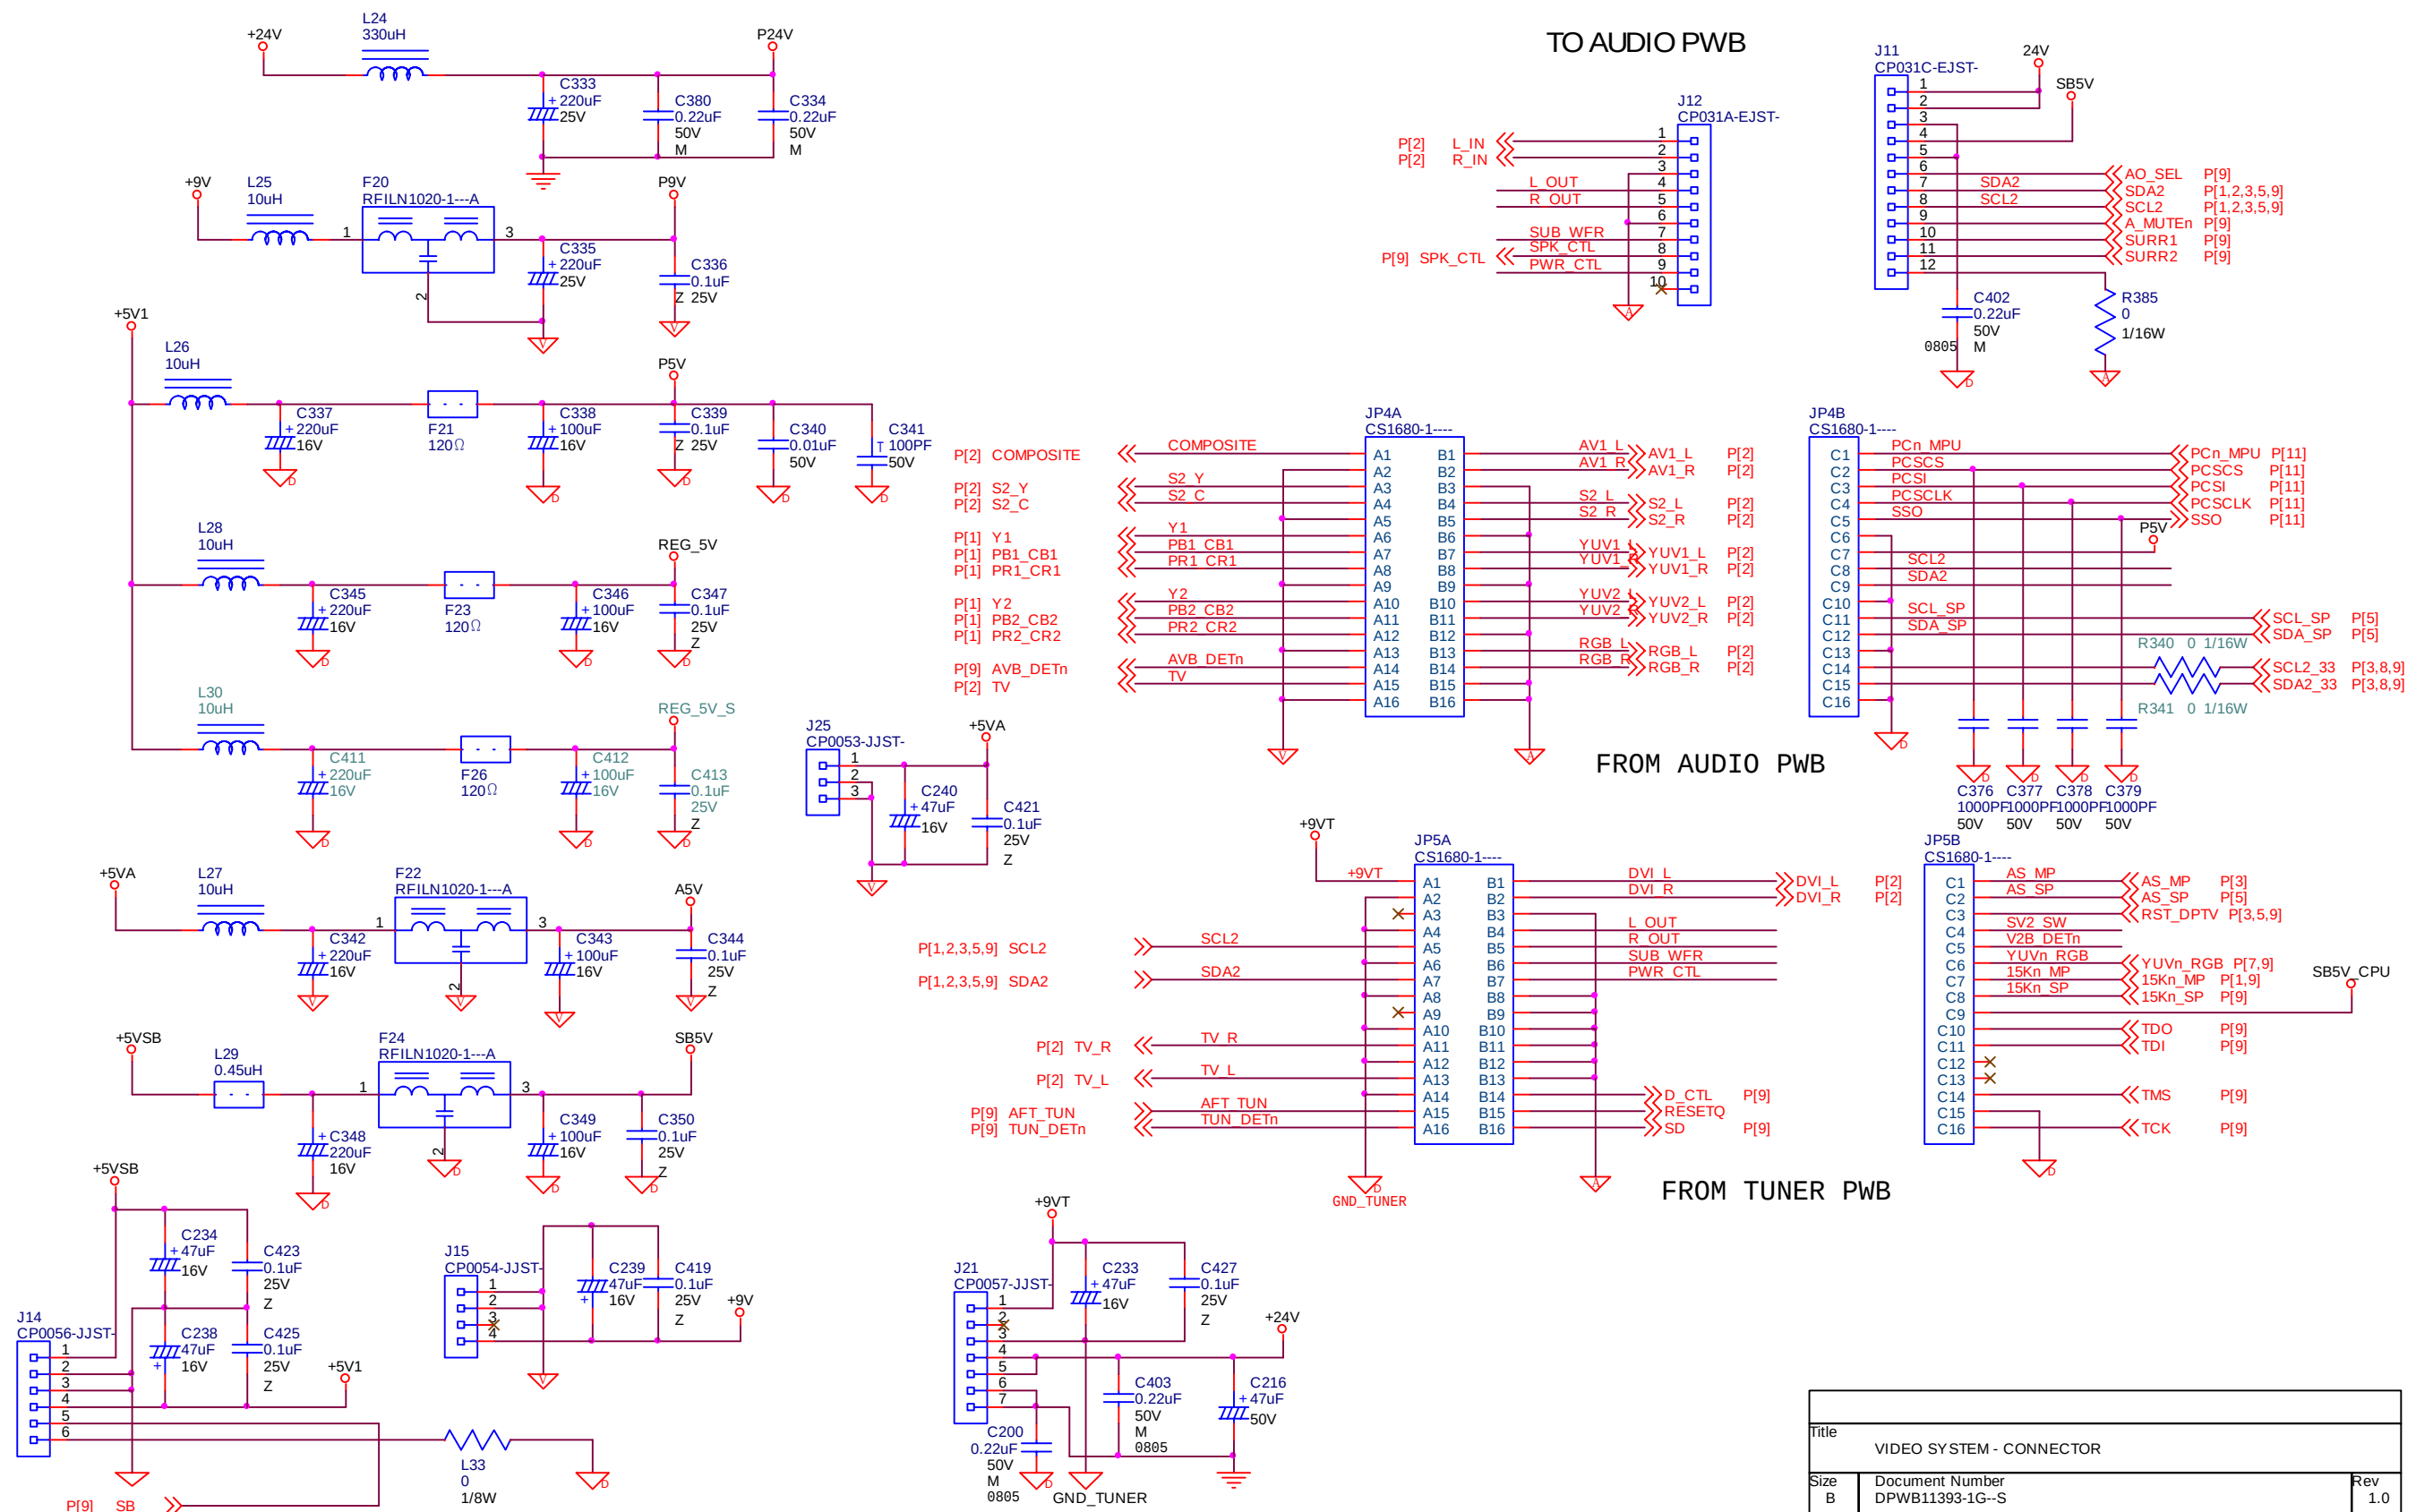


SCHEMATIC DIAGRAM

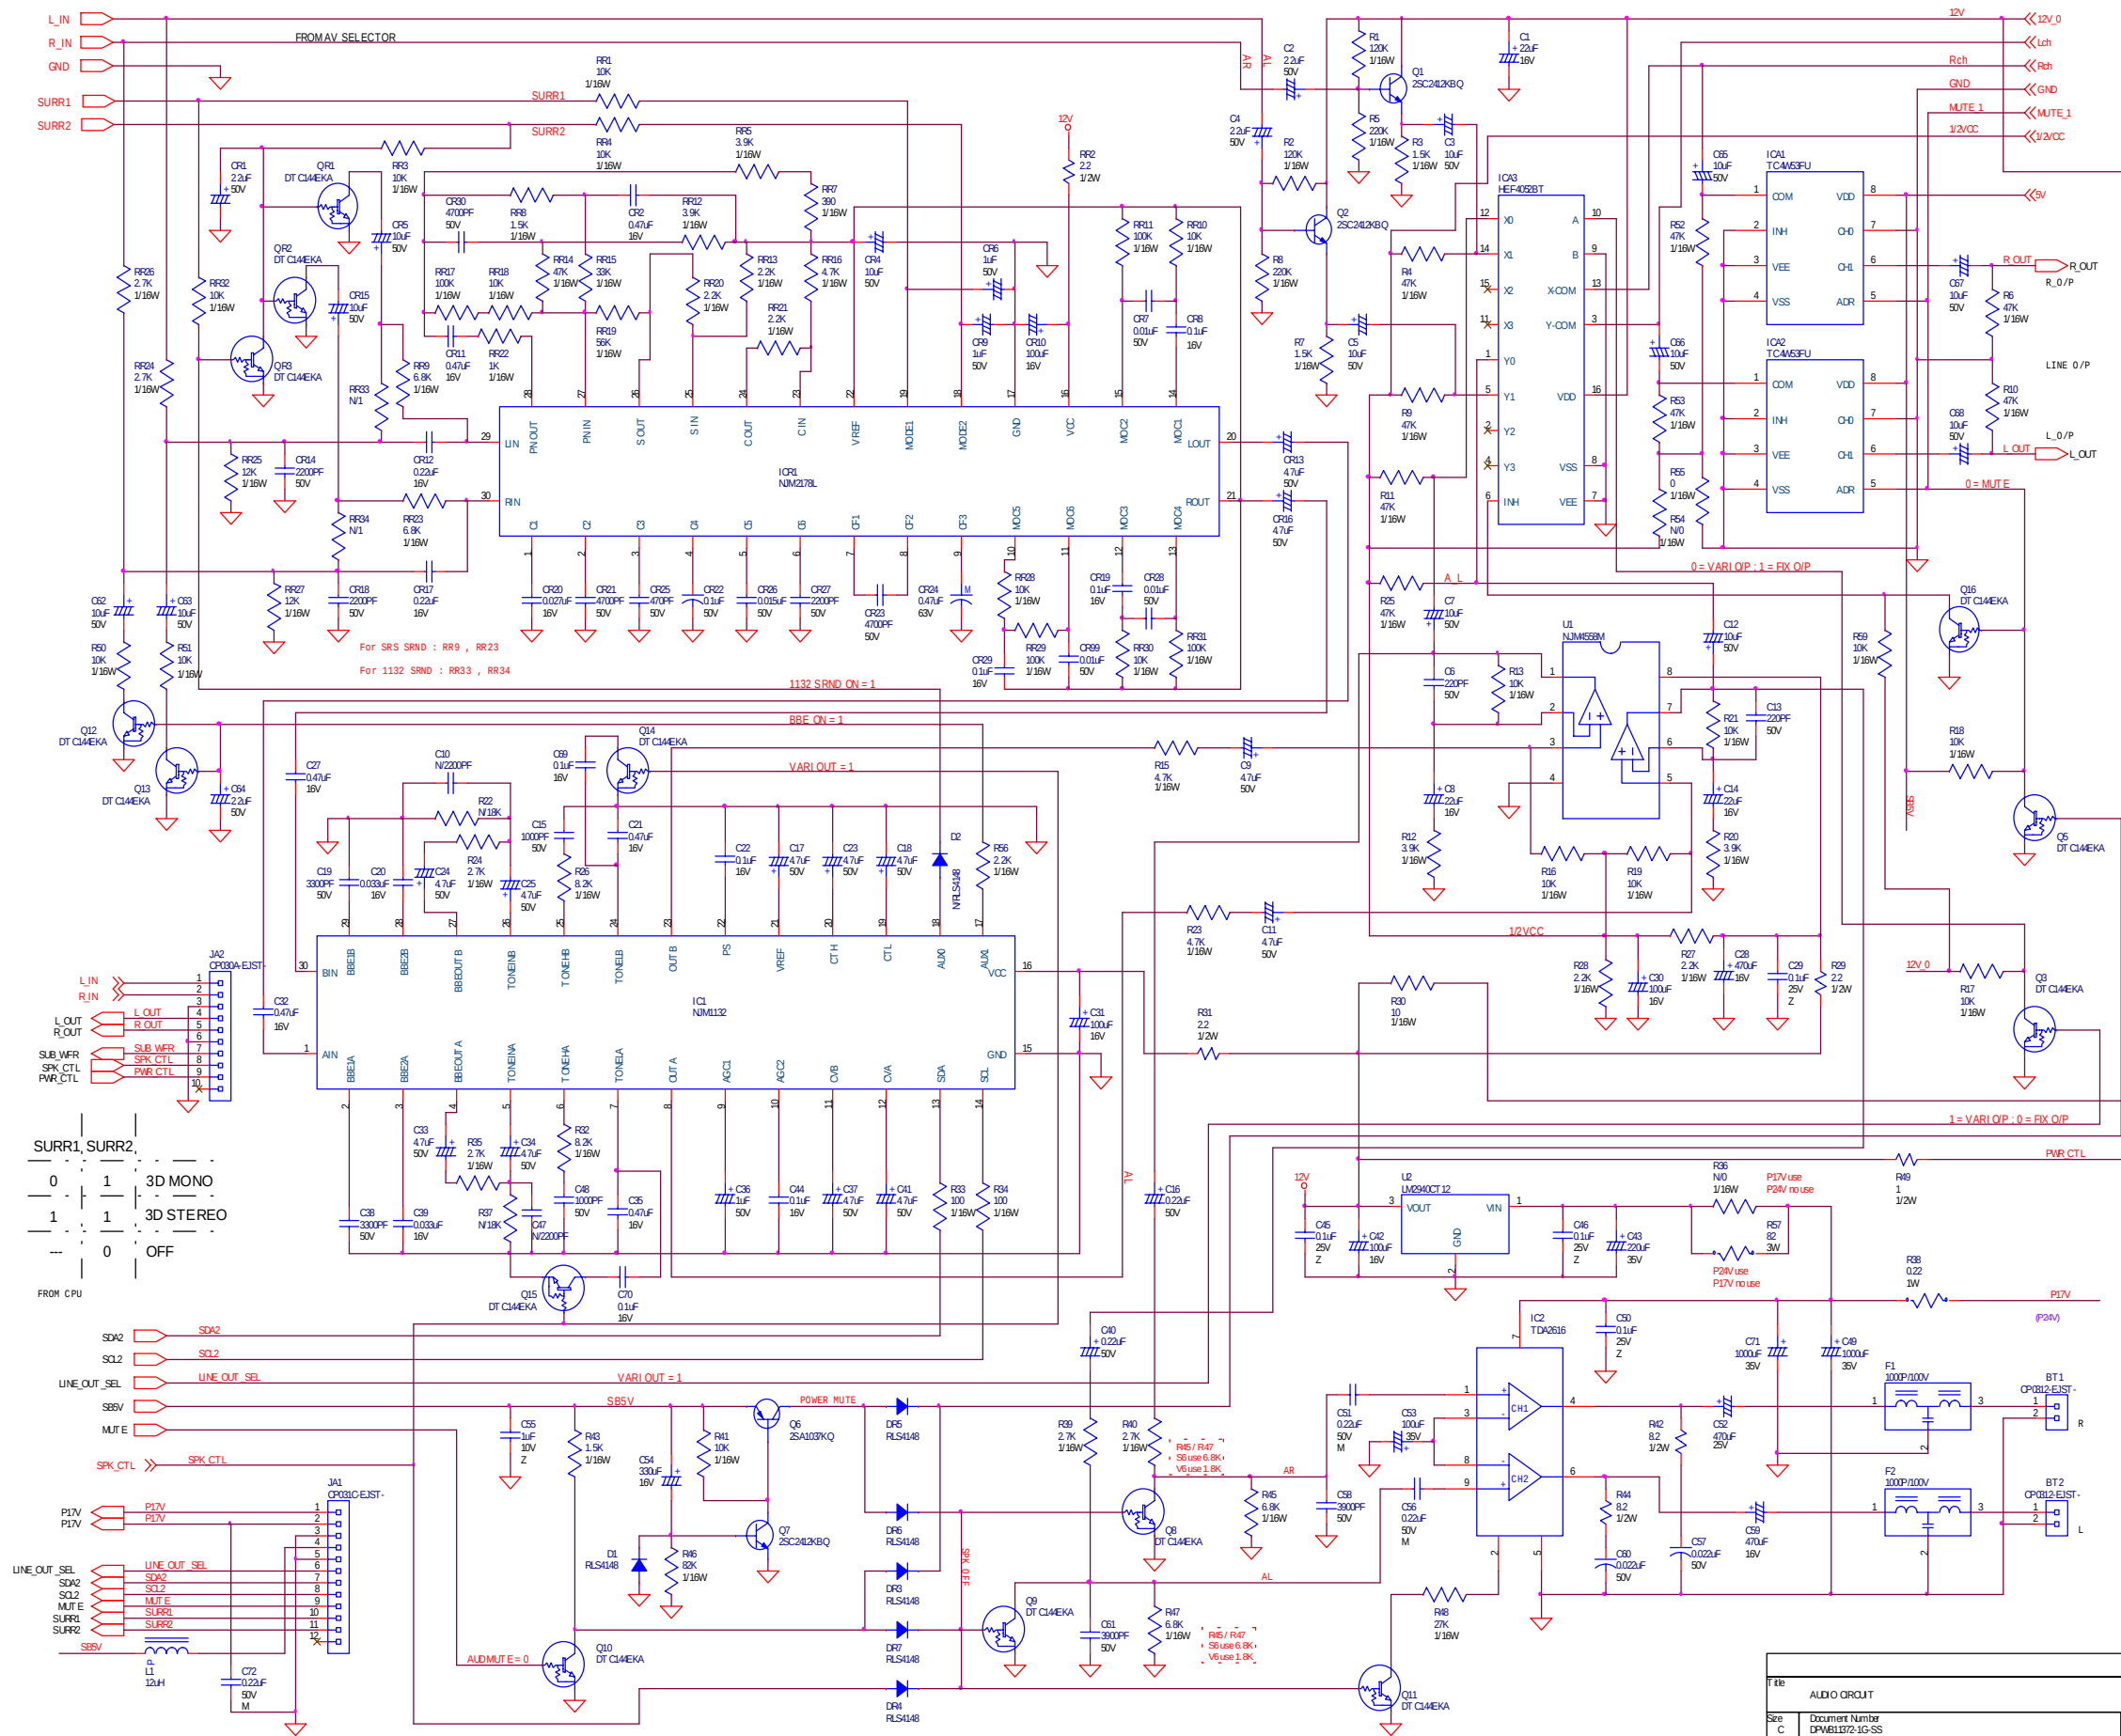
VER1.0

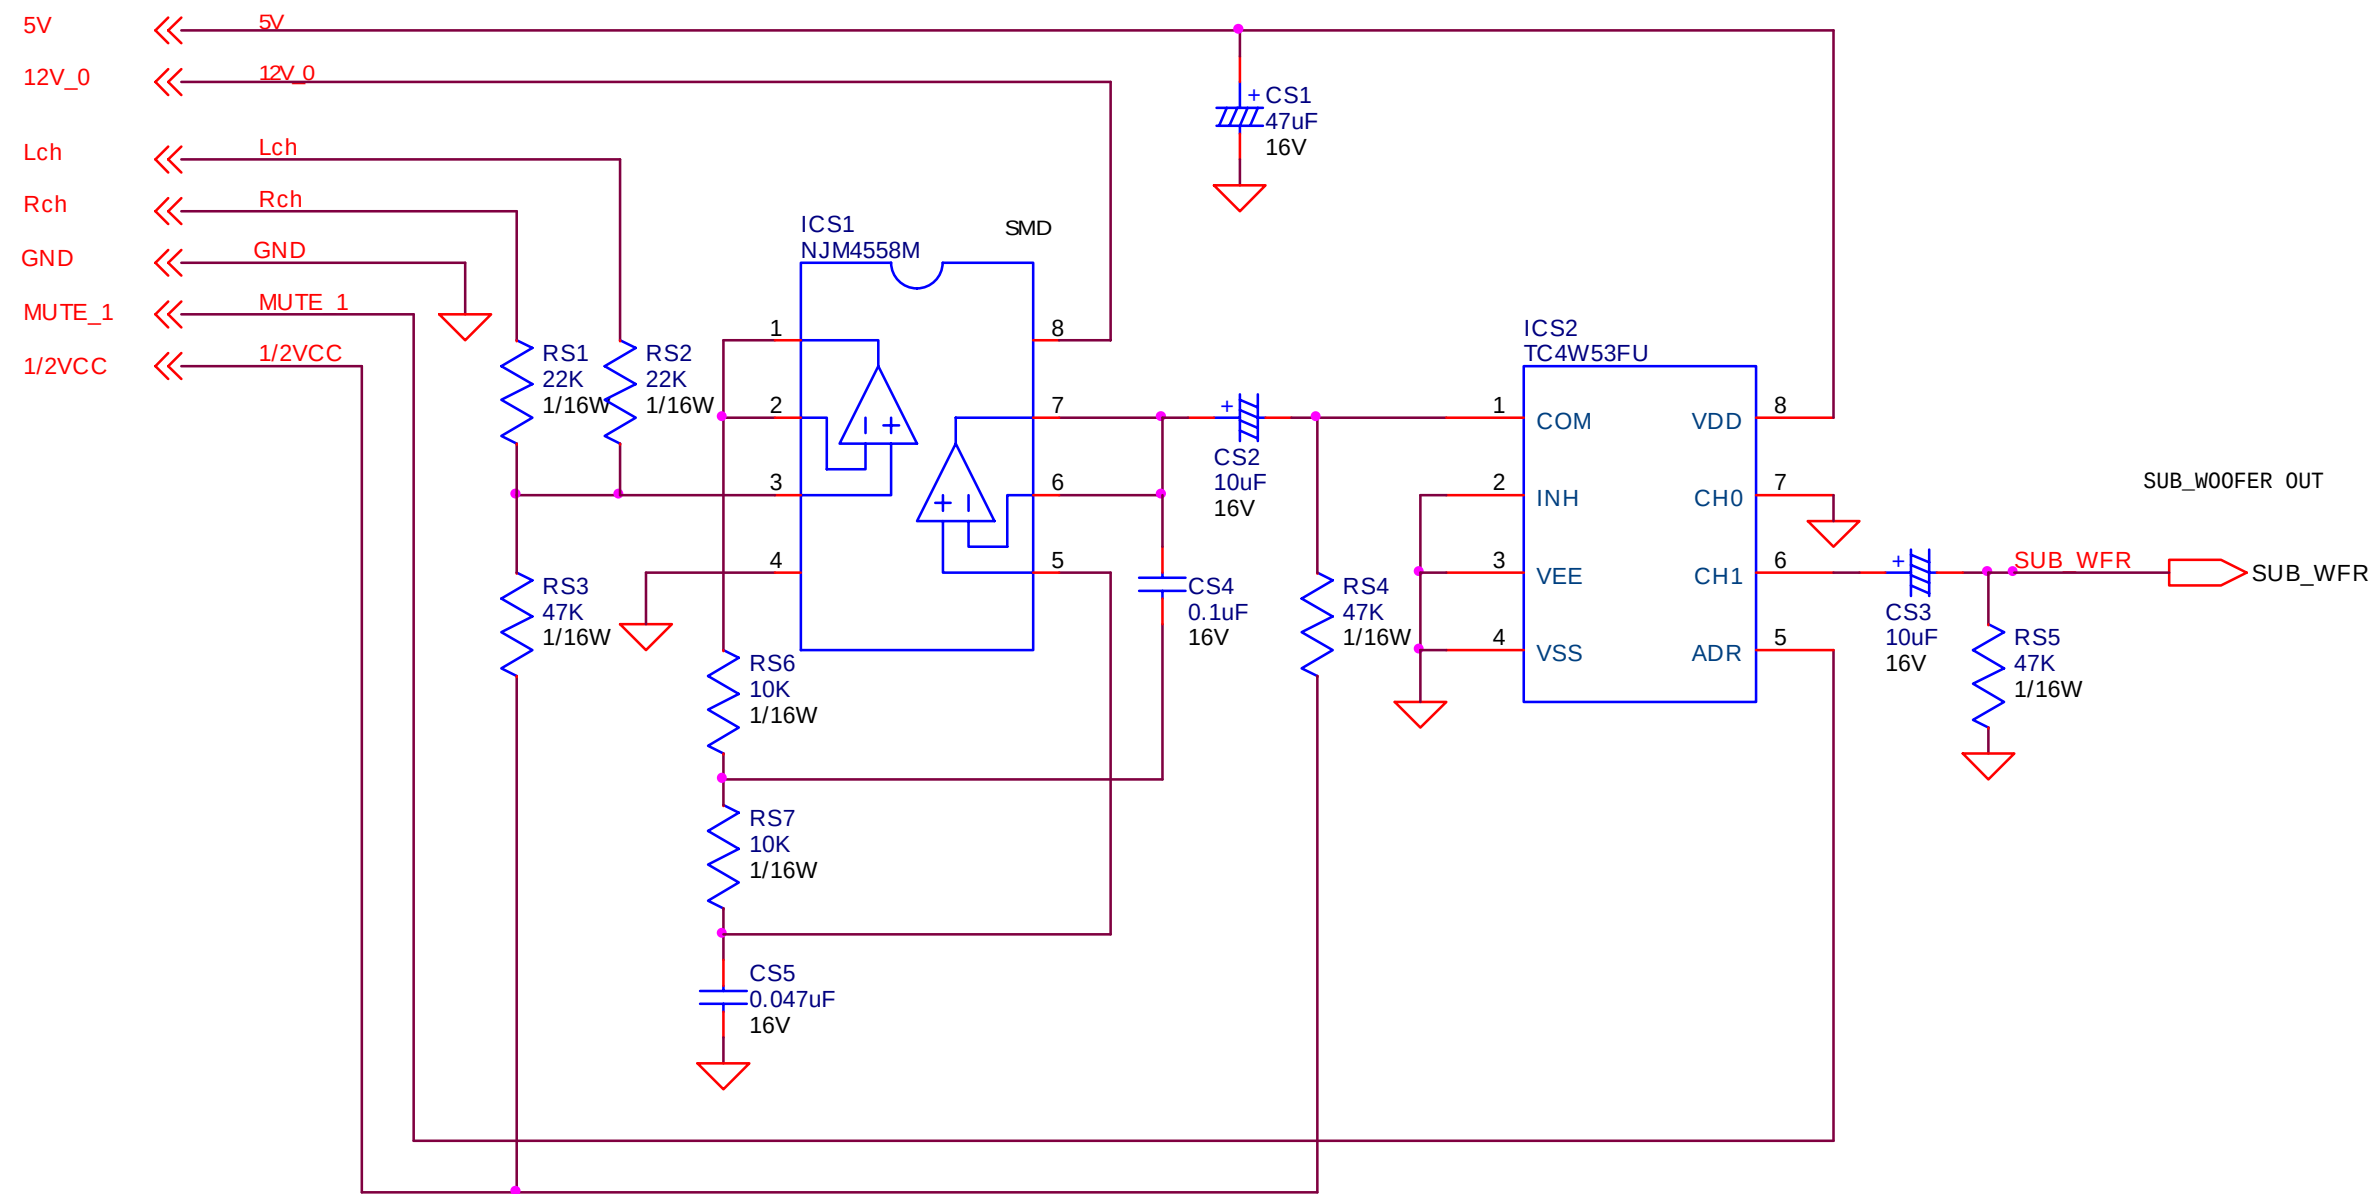


Title		
SUB_WOOFER		
Size	Document Number	Rev
A	DPWB11372-1G-SS	0.1
Date:	Monday, September 30, 2002	Sheet 2 of 2

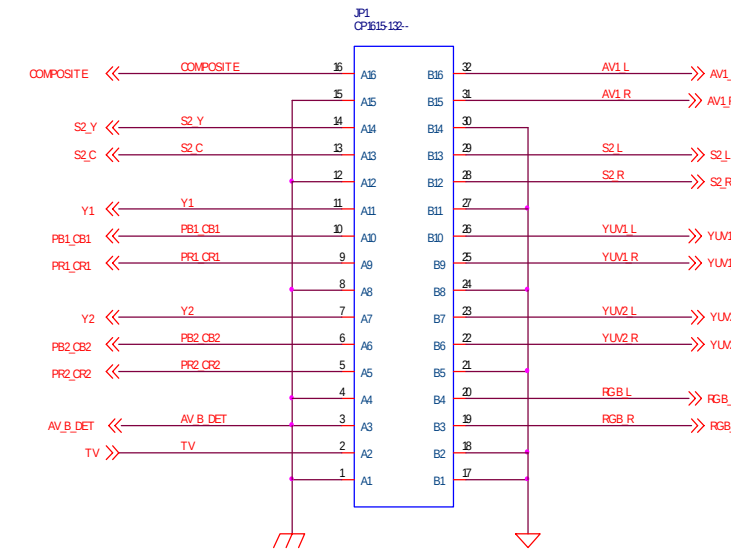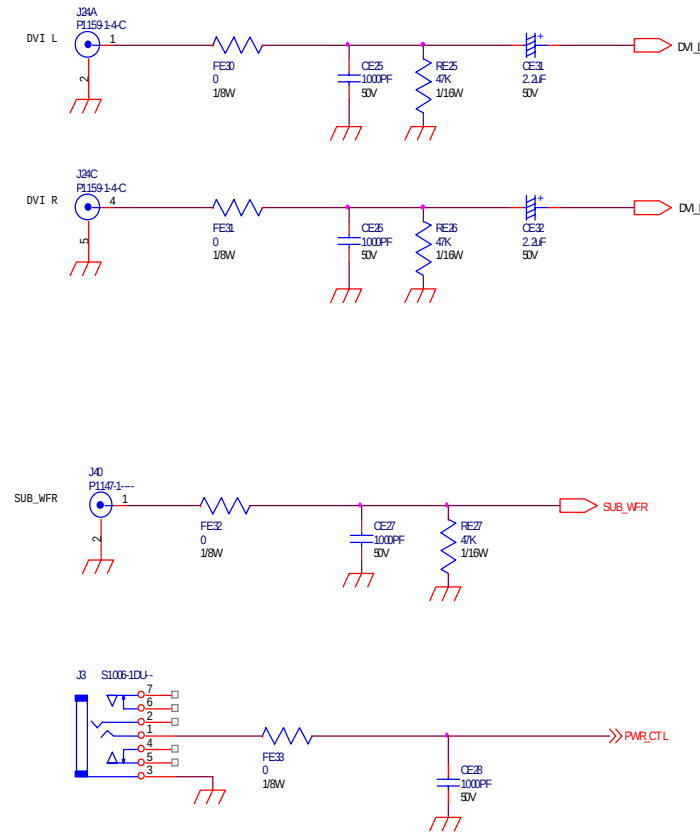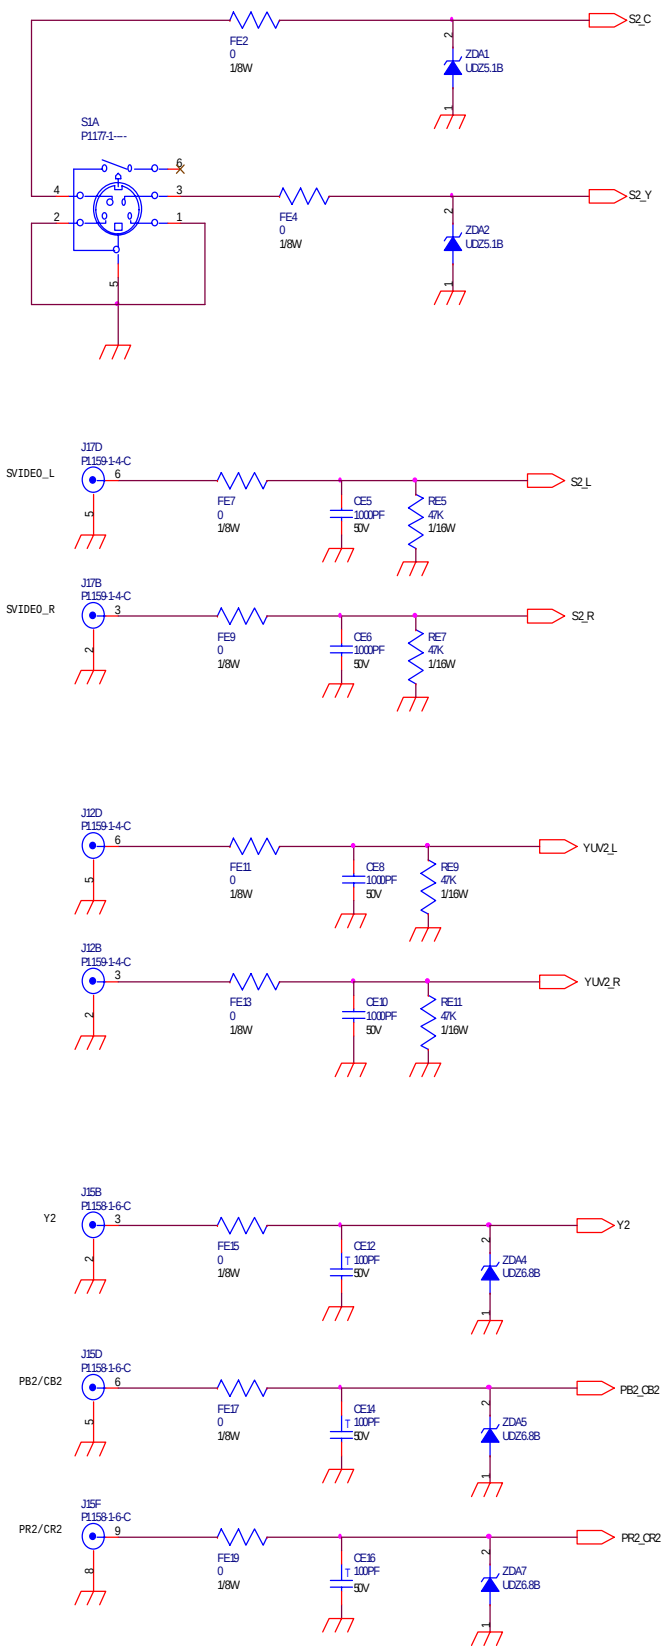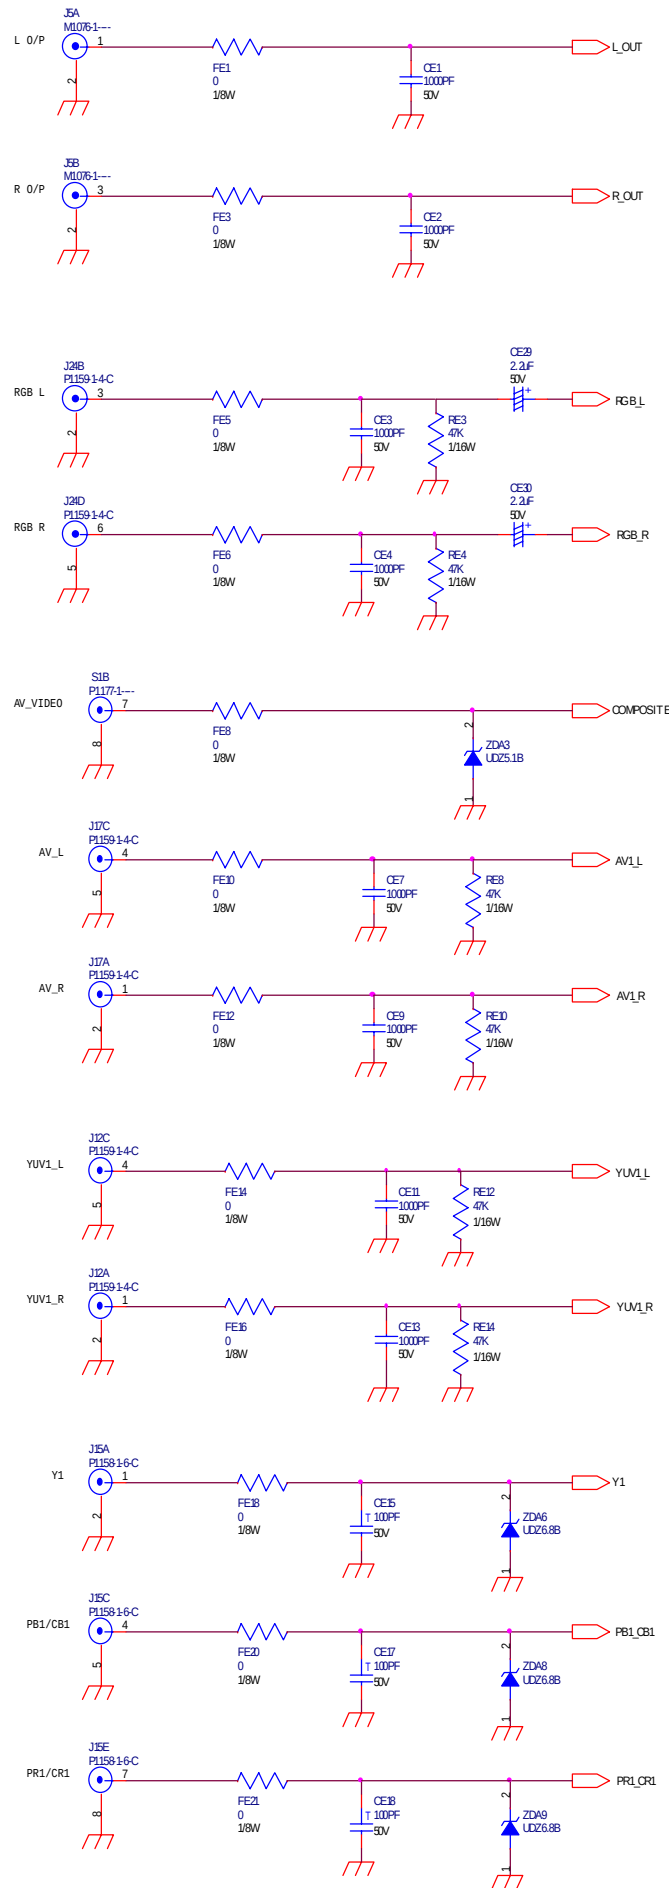


Title		
AV CONNECTOR(AV3)		
Size	Document Number	Rev
C	DPV611372-13-AS	01
Date	Monday, September 30, 2002	Sheet 1 of 2

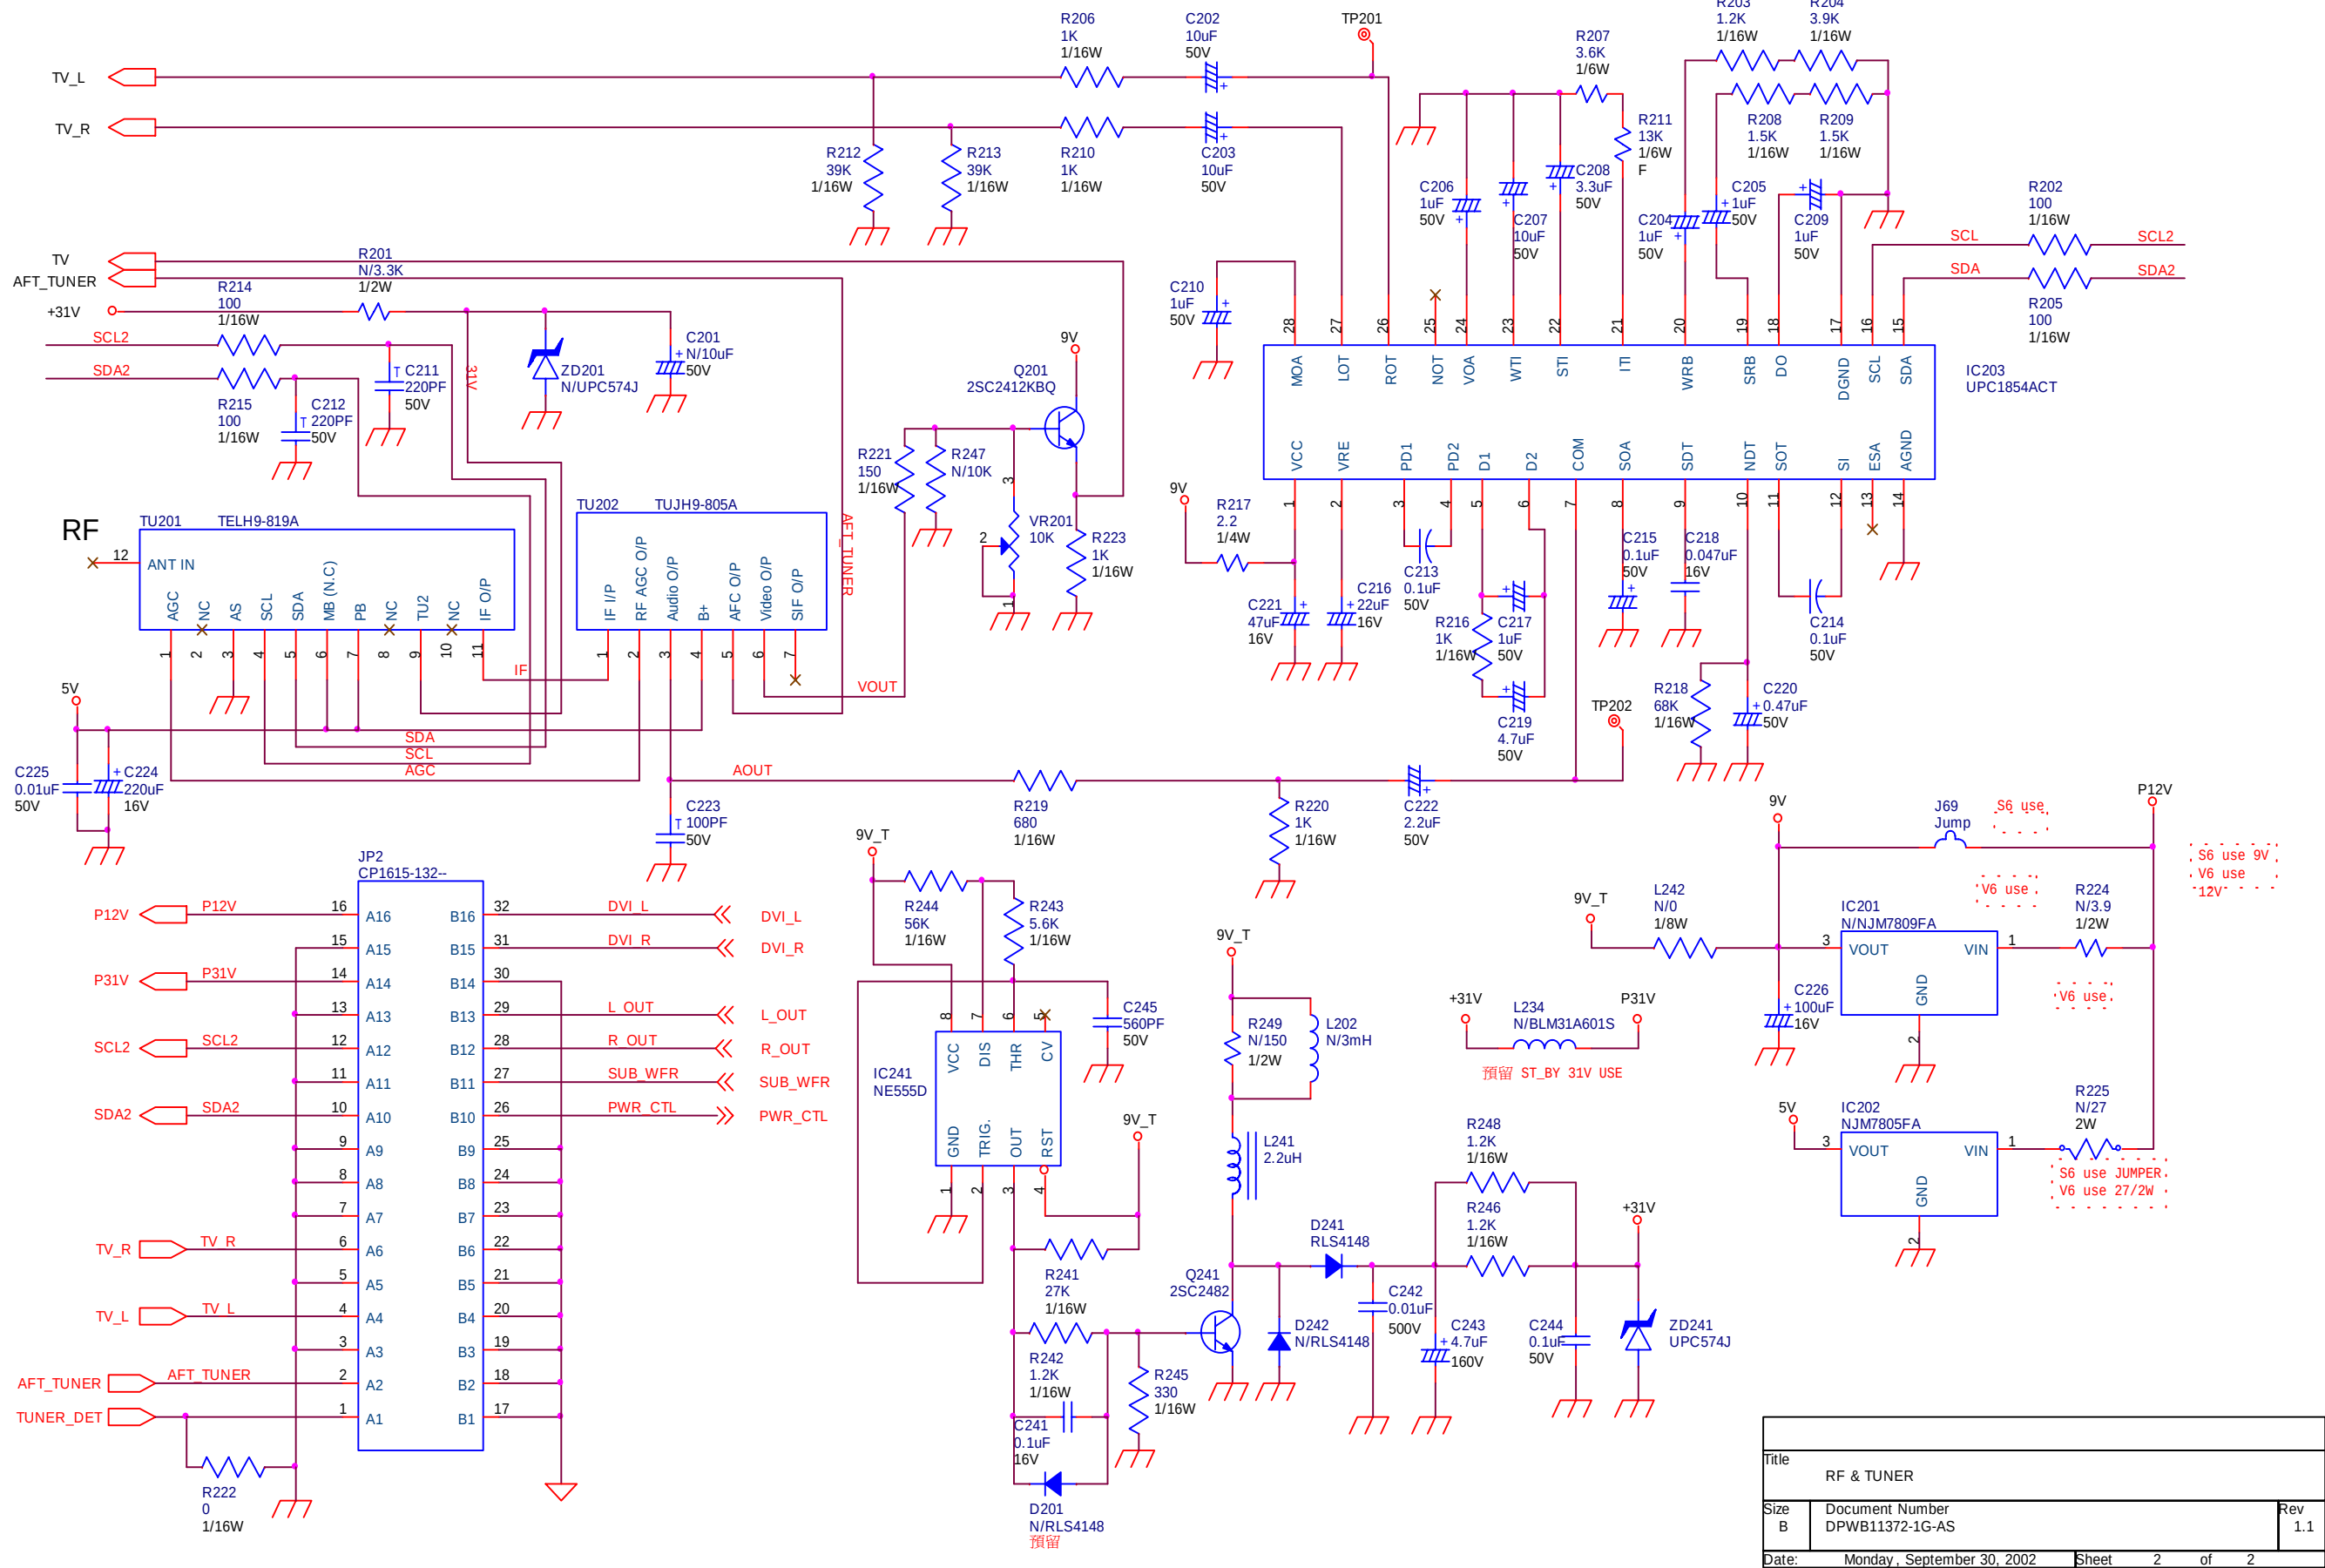


FRONT PANEL BOARD

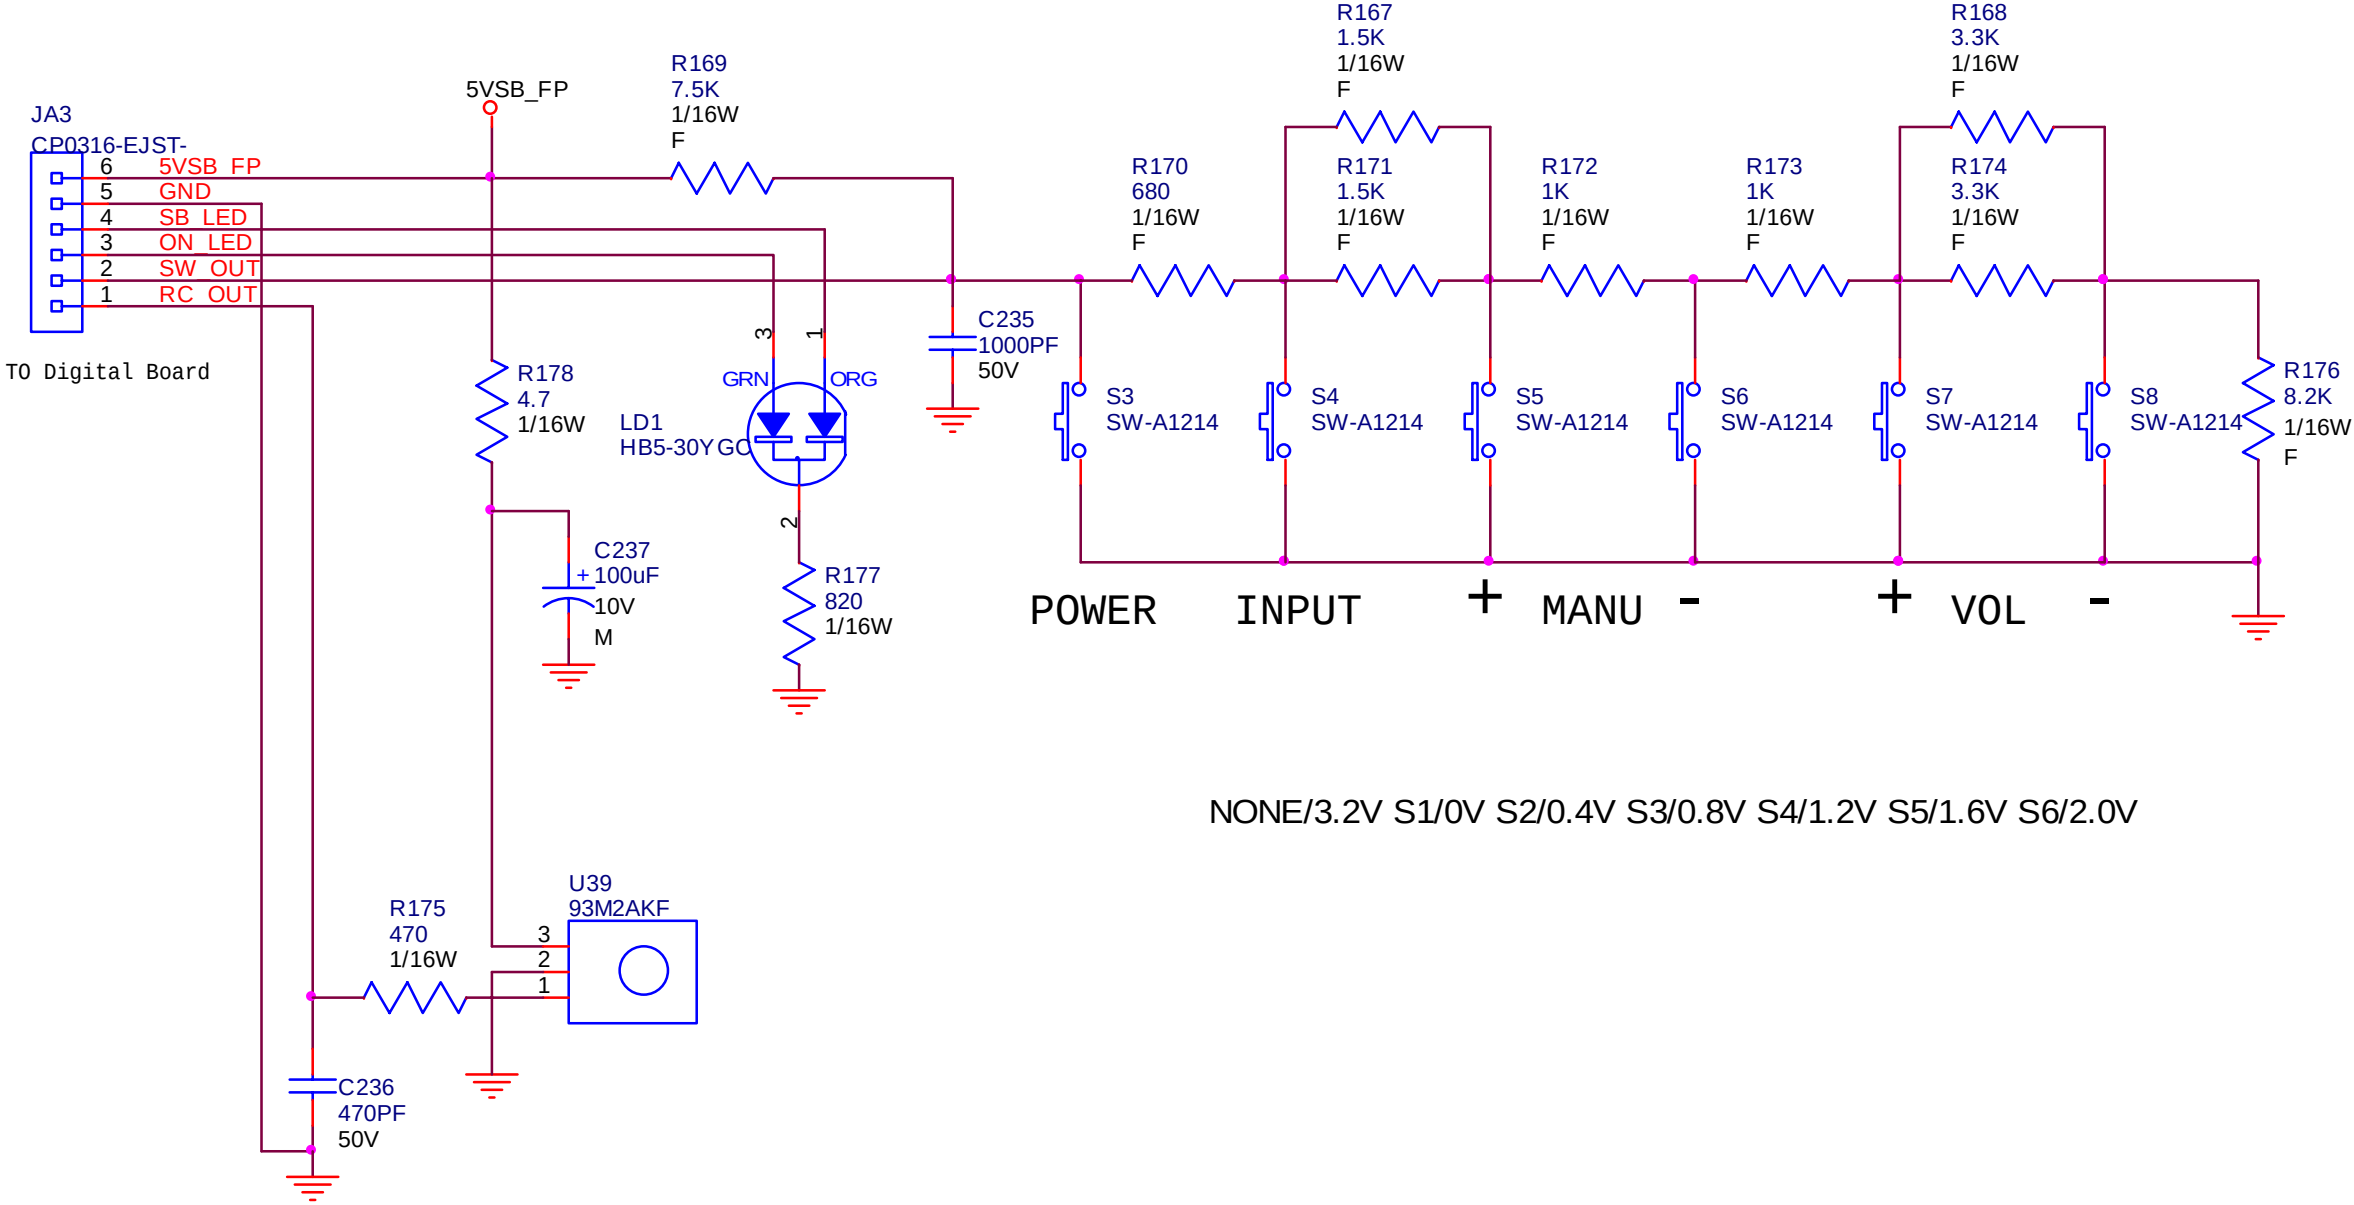

Title		
DIGITAL BOARD SYSTEM		
Size	Document Number	Rev
A	DPWB11372-1G-KS	0.1
Date:	Monday, September 30, 2002	Sheet 1 of 1

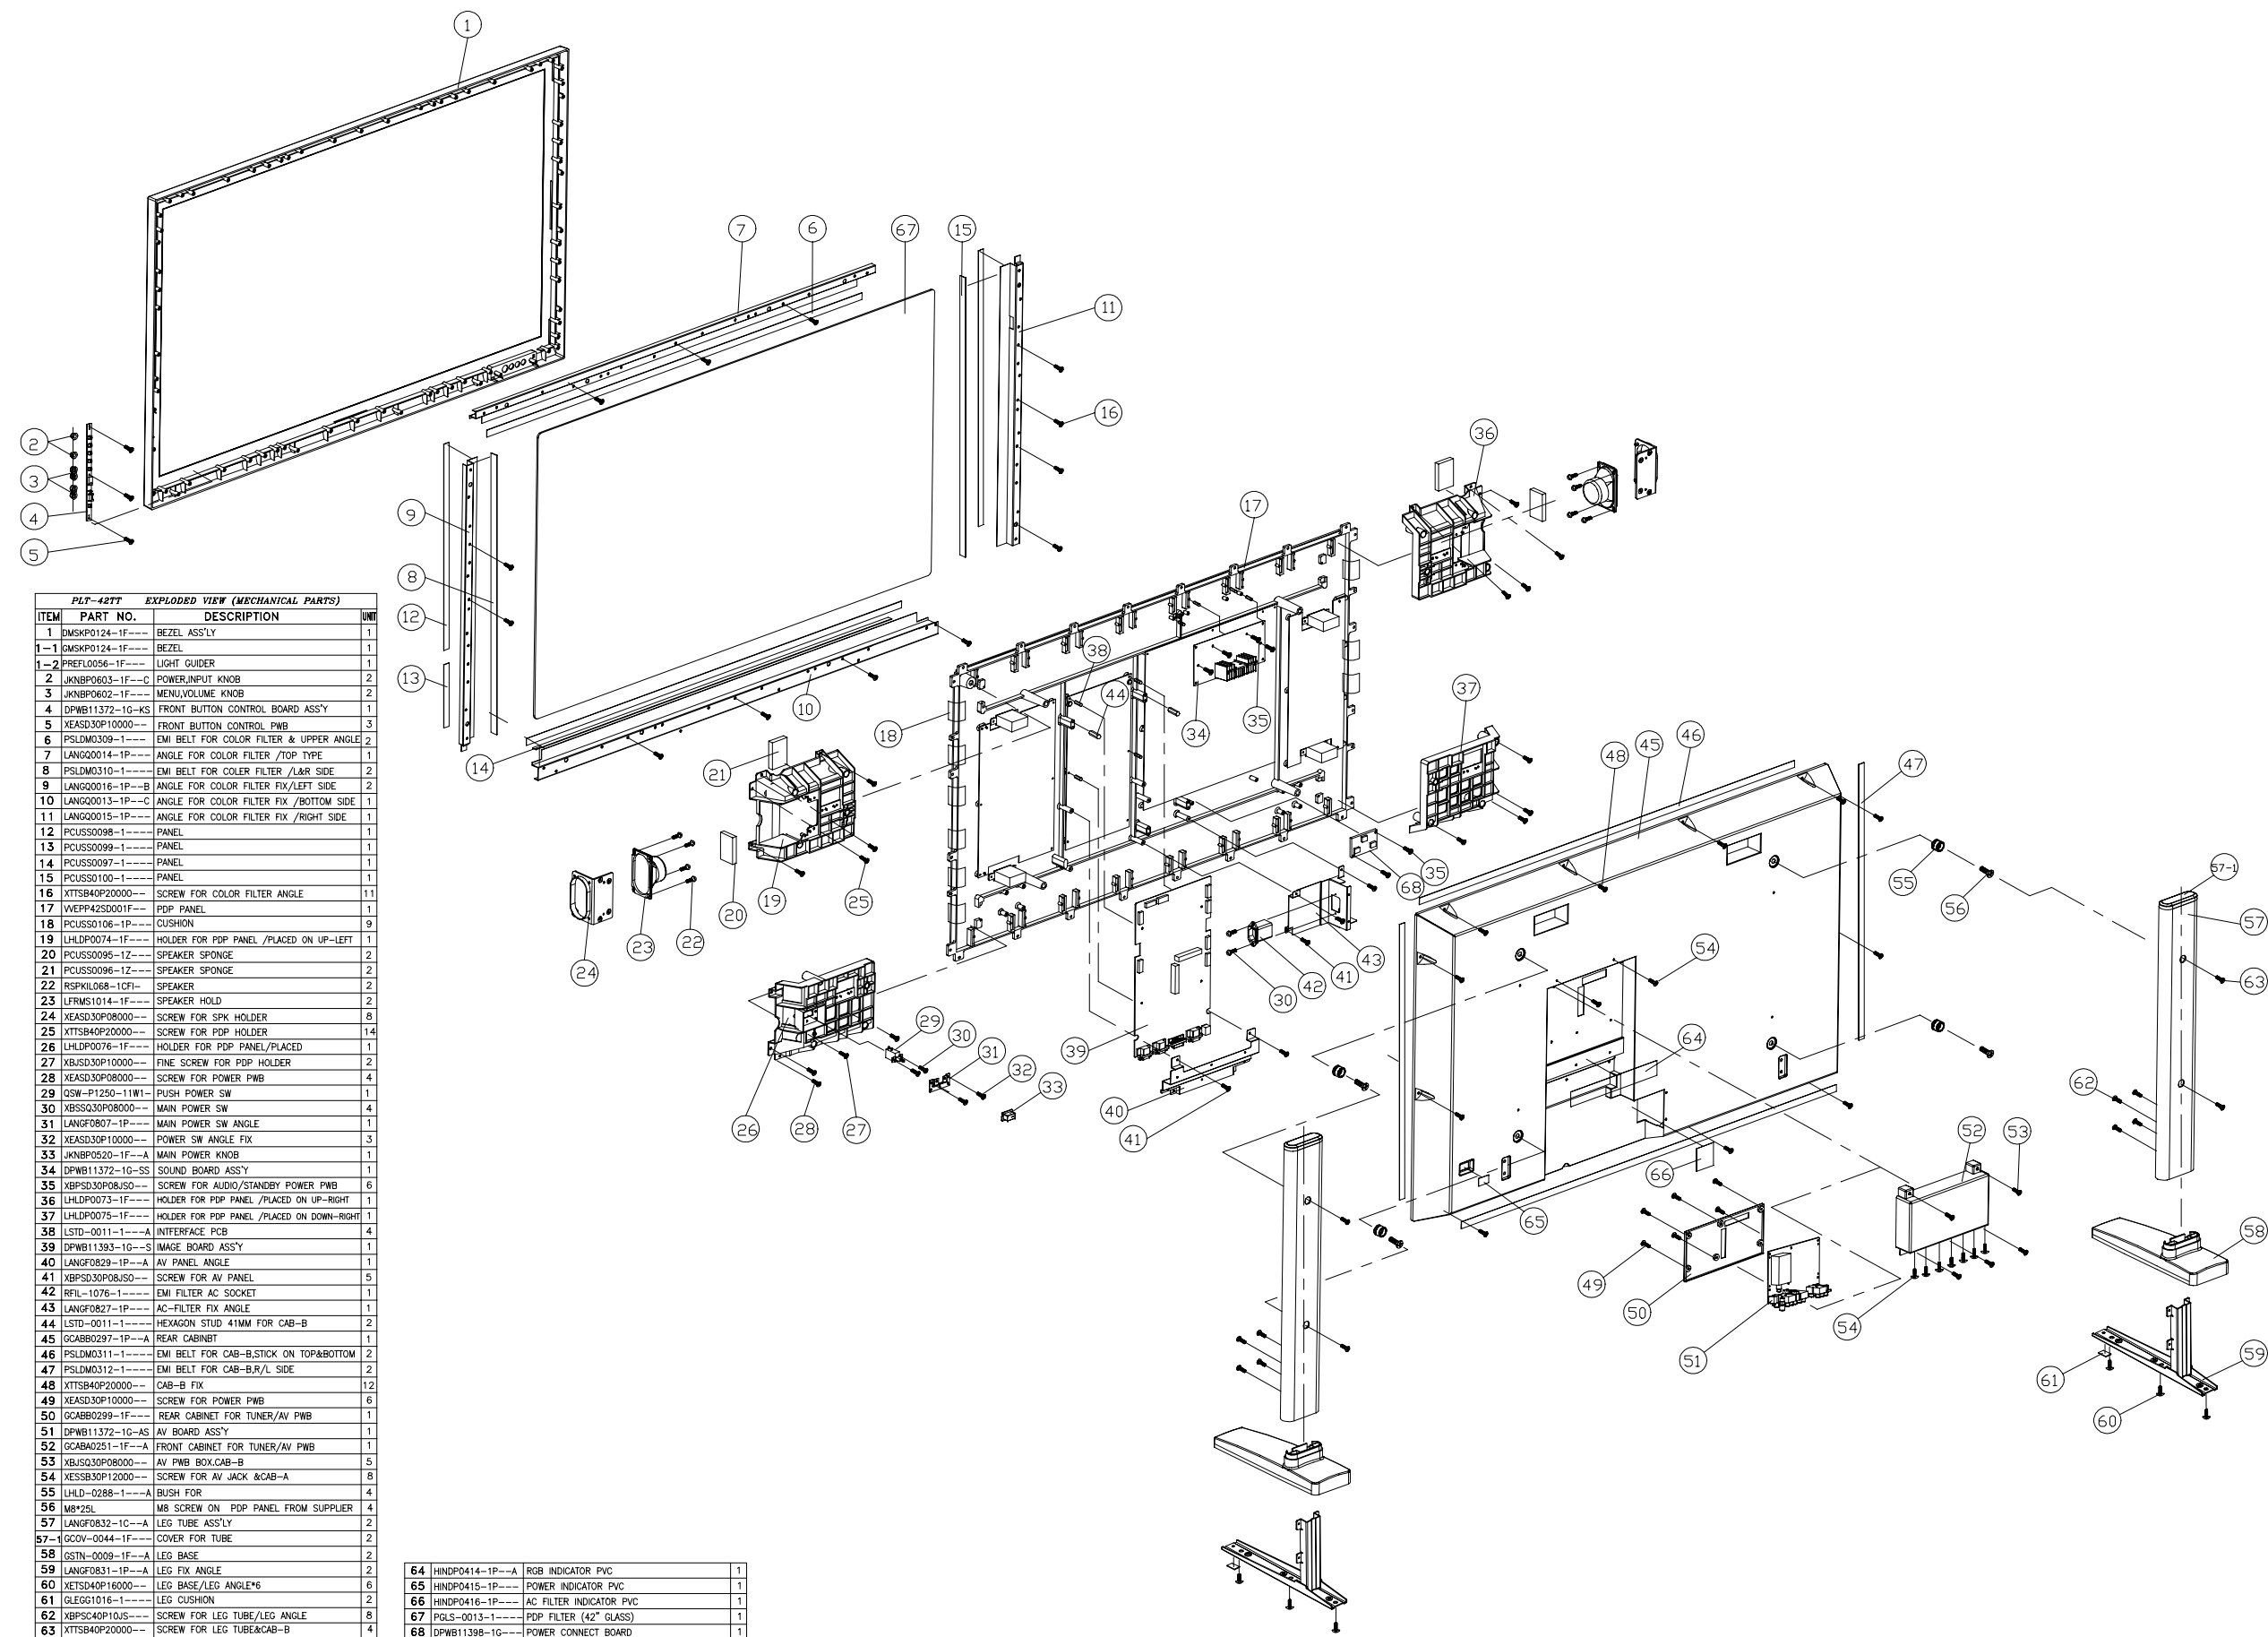

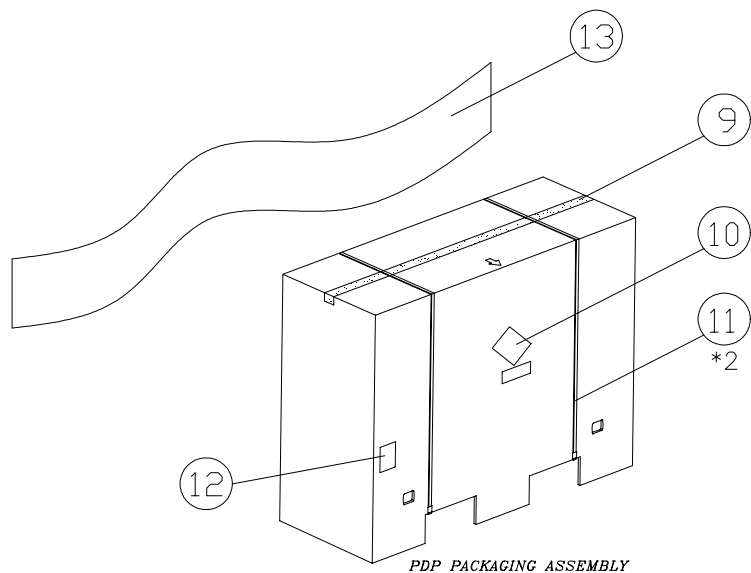

PLT-42TT EXPLODED VIEW (MECHANICAL PARTS)				
ITEM	PART NO.	DESCRIPTION	UNIT	REMARKS
1	SET	PLT-42TT	1	
2	TLBM1196-1----	MODEL LABEL	1	
3	TLABD1142-1----	BAR CODE	1	
4	TLABD1139-1B--A	SRS LABEL	1	
5	SSAKH0184-1--B	EPE BAG	1	
6	SPAKA0640-1F--A	POLYFOAM	1	
7	SPAKC0693-1R--U	CARTON	1	
8	JHNDP0020-1----	CASE HANDLE	4	
9	ZTAPEQ075T050--	TAPE	1	
10	TLABW0056-1----	G METER	1	
11	ZTIE-P155Y1600-	WRAPPING	2	
12	TLABD1025-1B--A	BARCODE	1	
13	ZTAPEZ500T500--	PE FILM	1	
14	TINSE1972-1----	MANUAL	1	
	TMAPT1007-1----	QUICK STARE GUIDE	1	
	BRC-24IC-----	BRC	1	
	QACCF1018-1D-N-	POWER CORD	1	
	QCODS1028-1D---	RGB CABLE	1	
	RBATB0221-1DC--	BATTERY	1	

