


!	Symbol No.	AV-21MF11SEF	AV-21MF11SNF	AV-21MF11SPF	Part name	Description
	R404	-	-	VE-30012696	SMD R	1/16W 47K J
	R407	-	-	VE-30000590	CF R	1/4W 2.2K J
	R410	-	-	VE-30000471	CF R	1/4W 10K J
	R412	-	-	VE-30012696	SMD R	1/16W 47K J
	R465	-	-	VE-30012692	SMD R	1/16W 4.7K J
	R466	-	-	VE-30012705	SMD R	1/16W 6.8K J
	R467	-	-	VE-30012641	SMD R	1/16W 10K J
	R468	-	-	VE-30012641	SMD R	1/16W 10K J
	R552	-	-	VE-30012692	SMD R	1/16W 4.7K J
	C404	-	-	VE-30000225	CER CAP.	220PF 50V J SL
	C446	-	-	VE-30000345	EL CAP.	10UF 50V M
	C452	VE-30012581 1NF 50V K R	VE-30012581 1NF 50V K R	VE-30012589 4.7NF 50V K	SMD CAP.	
	C453	-	-	VE-30012581	SMD CAP.	1NF 50V K R
	C457	-	-	VE-30012567	SMD CAP.	220PF 50V J
	L407	-	-	VE-30002002	FIXED COIL	47UH
	D401	-	-	VE-30012411	SMD DIODE	
	D402	-	-	VE-30012411	SMD DIODE	
	Q401	-	-	VE-30001457	SMD TRANSISTOR	
	Q402	-	-	VE-30001457	SMD TRANSISTOR	
	Q405	-	-	VE-30001457	SMD TRANSISTOR	
	IC403	VE-30026922	VE-30026920	VE-30026922	I.C.	
	IC500	VE-20139609	VE-20137808	VE-20139608	I.C. (MEMORY)	
	Z401	-	-	VE-30001707	SAW FILTER	
	Z402	VE-30012544	VE-30012622	VE-30001690	SAW FILTER	
	Z403	VE-30001728 TRIPLE TRAP	VE-30001724 SER FILTER 5.5MHz	VE-30001728 TRIPLE TRAP		


MAIN PWB (1/6)
(μ CONTROLLER)

VE-20121217 (AV-21MF11SEF)
VE-20127567 (AV-21MF11SNF)
VE-20121219 (AV-21MF11SPF)


MAIN PWB (2/6)
(VIDEO PROCESSOR)

- VE-20121217 (AV-21MF11SEF)
- VE-20127567 (AV-21MF11SNF)
- VE-20121219 (AV-21MF11SPF)

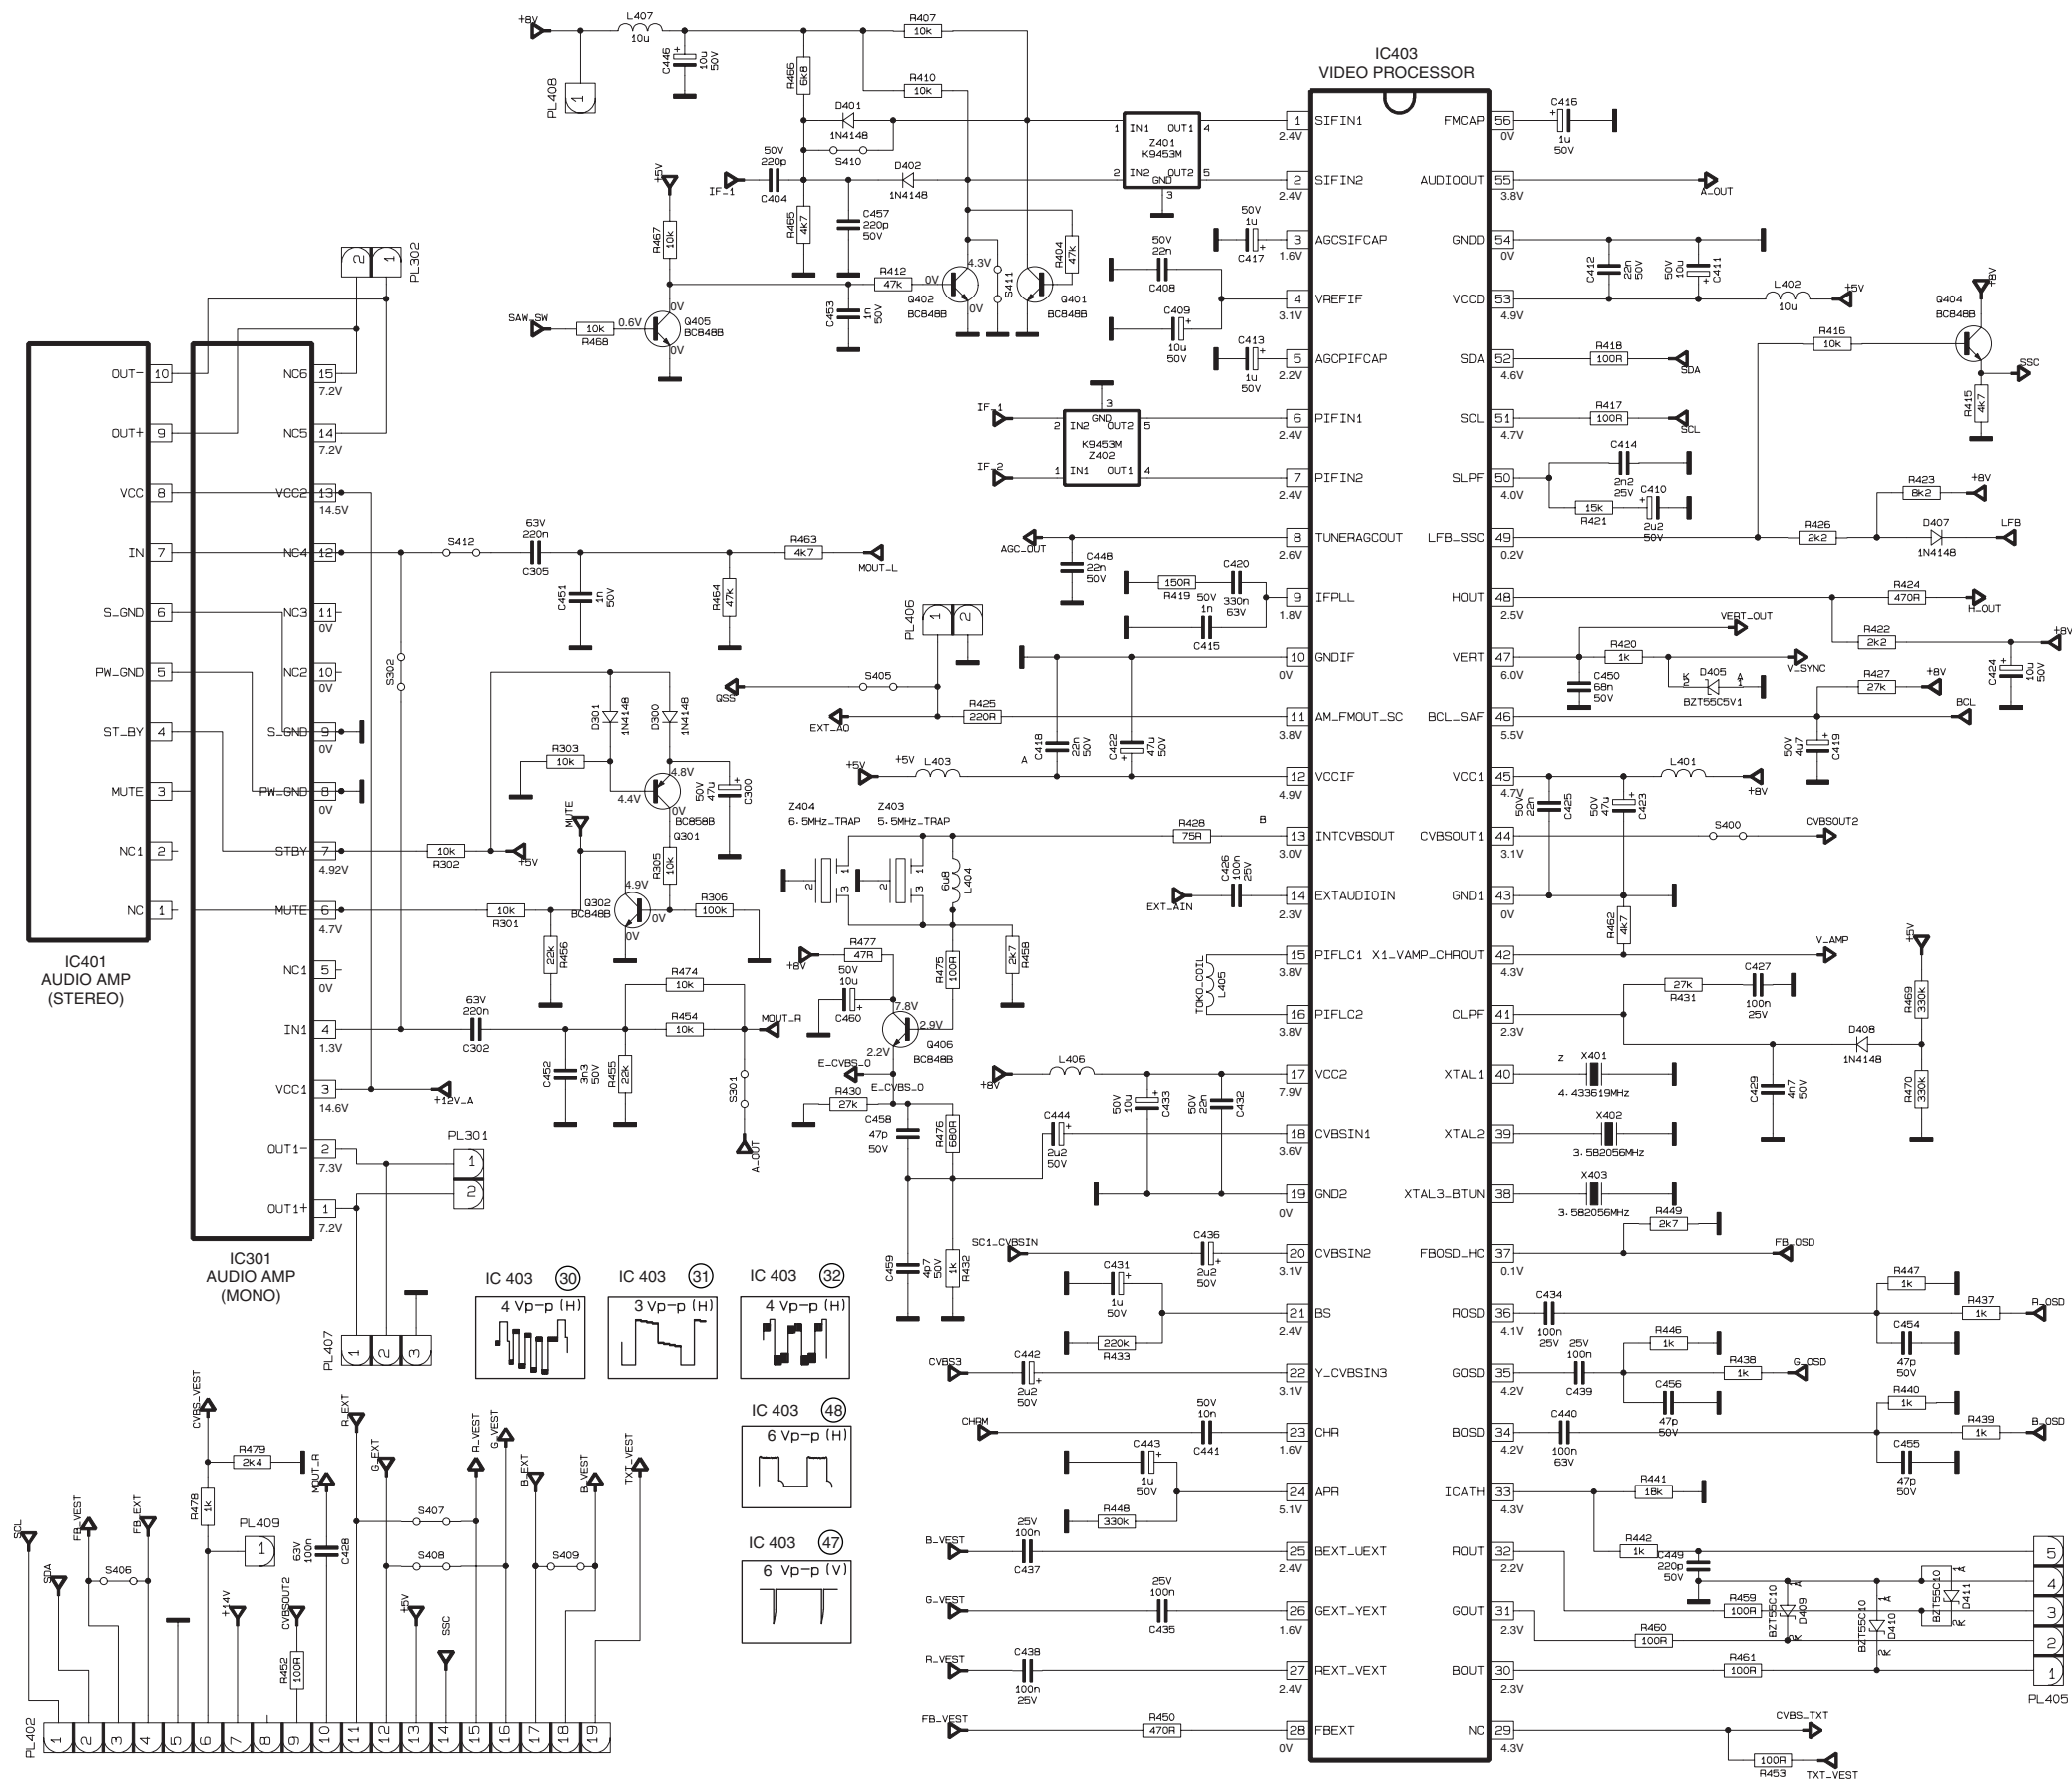

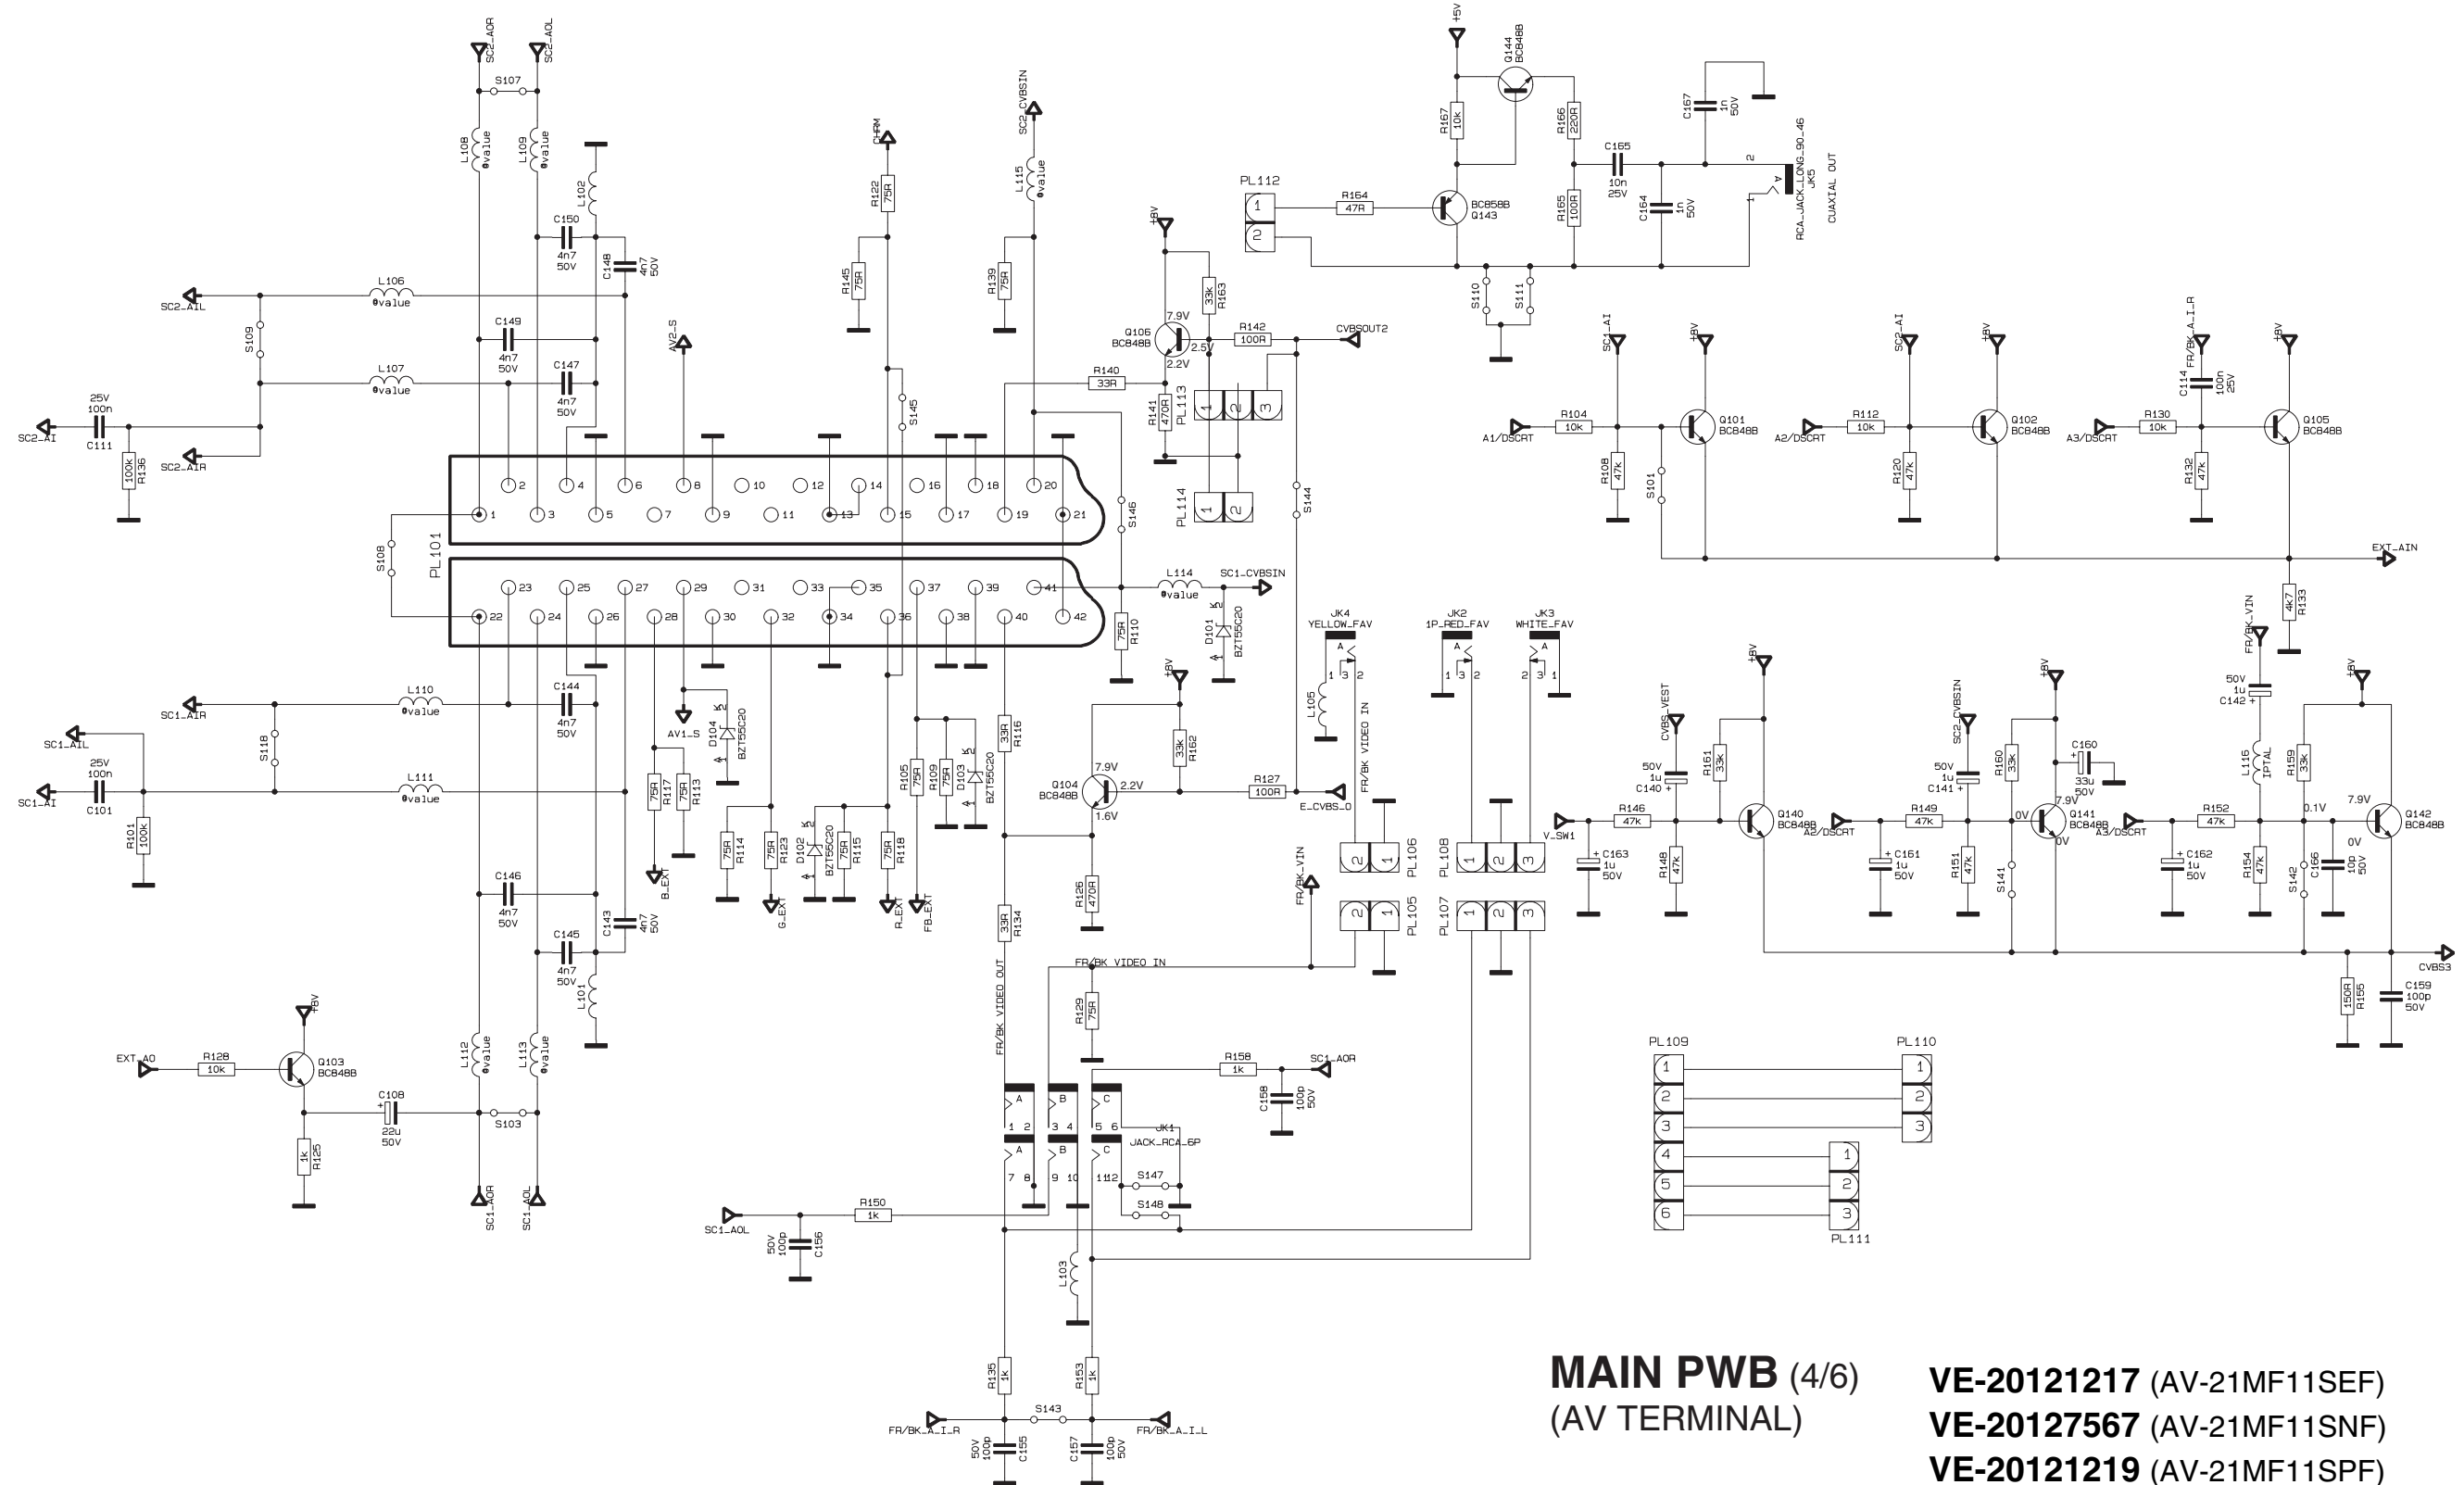

MAIN PWB CIRCUIT DIAGRAM [5/6]

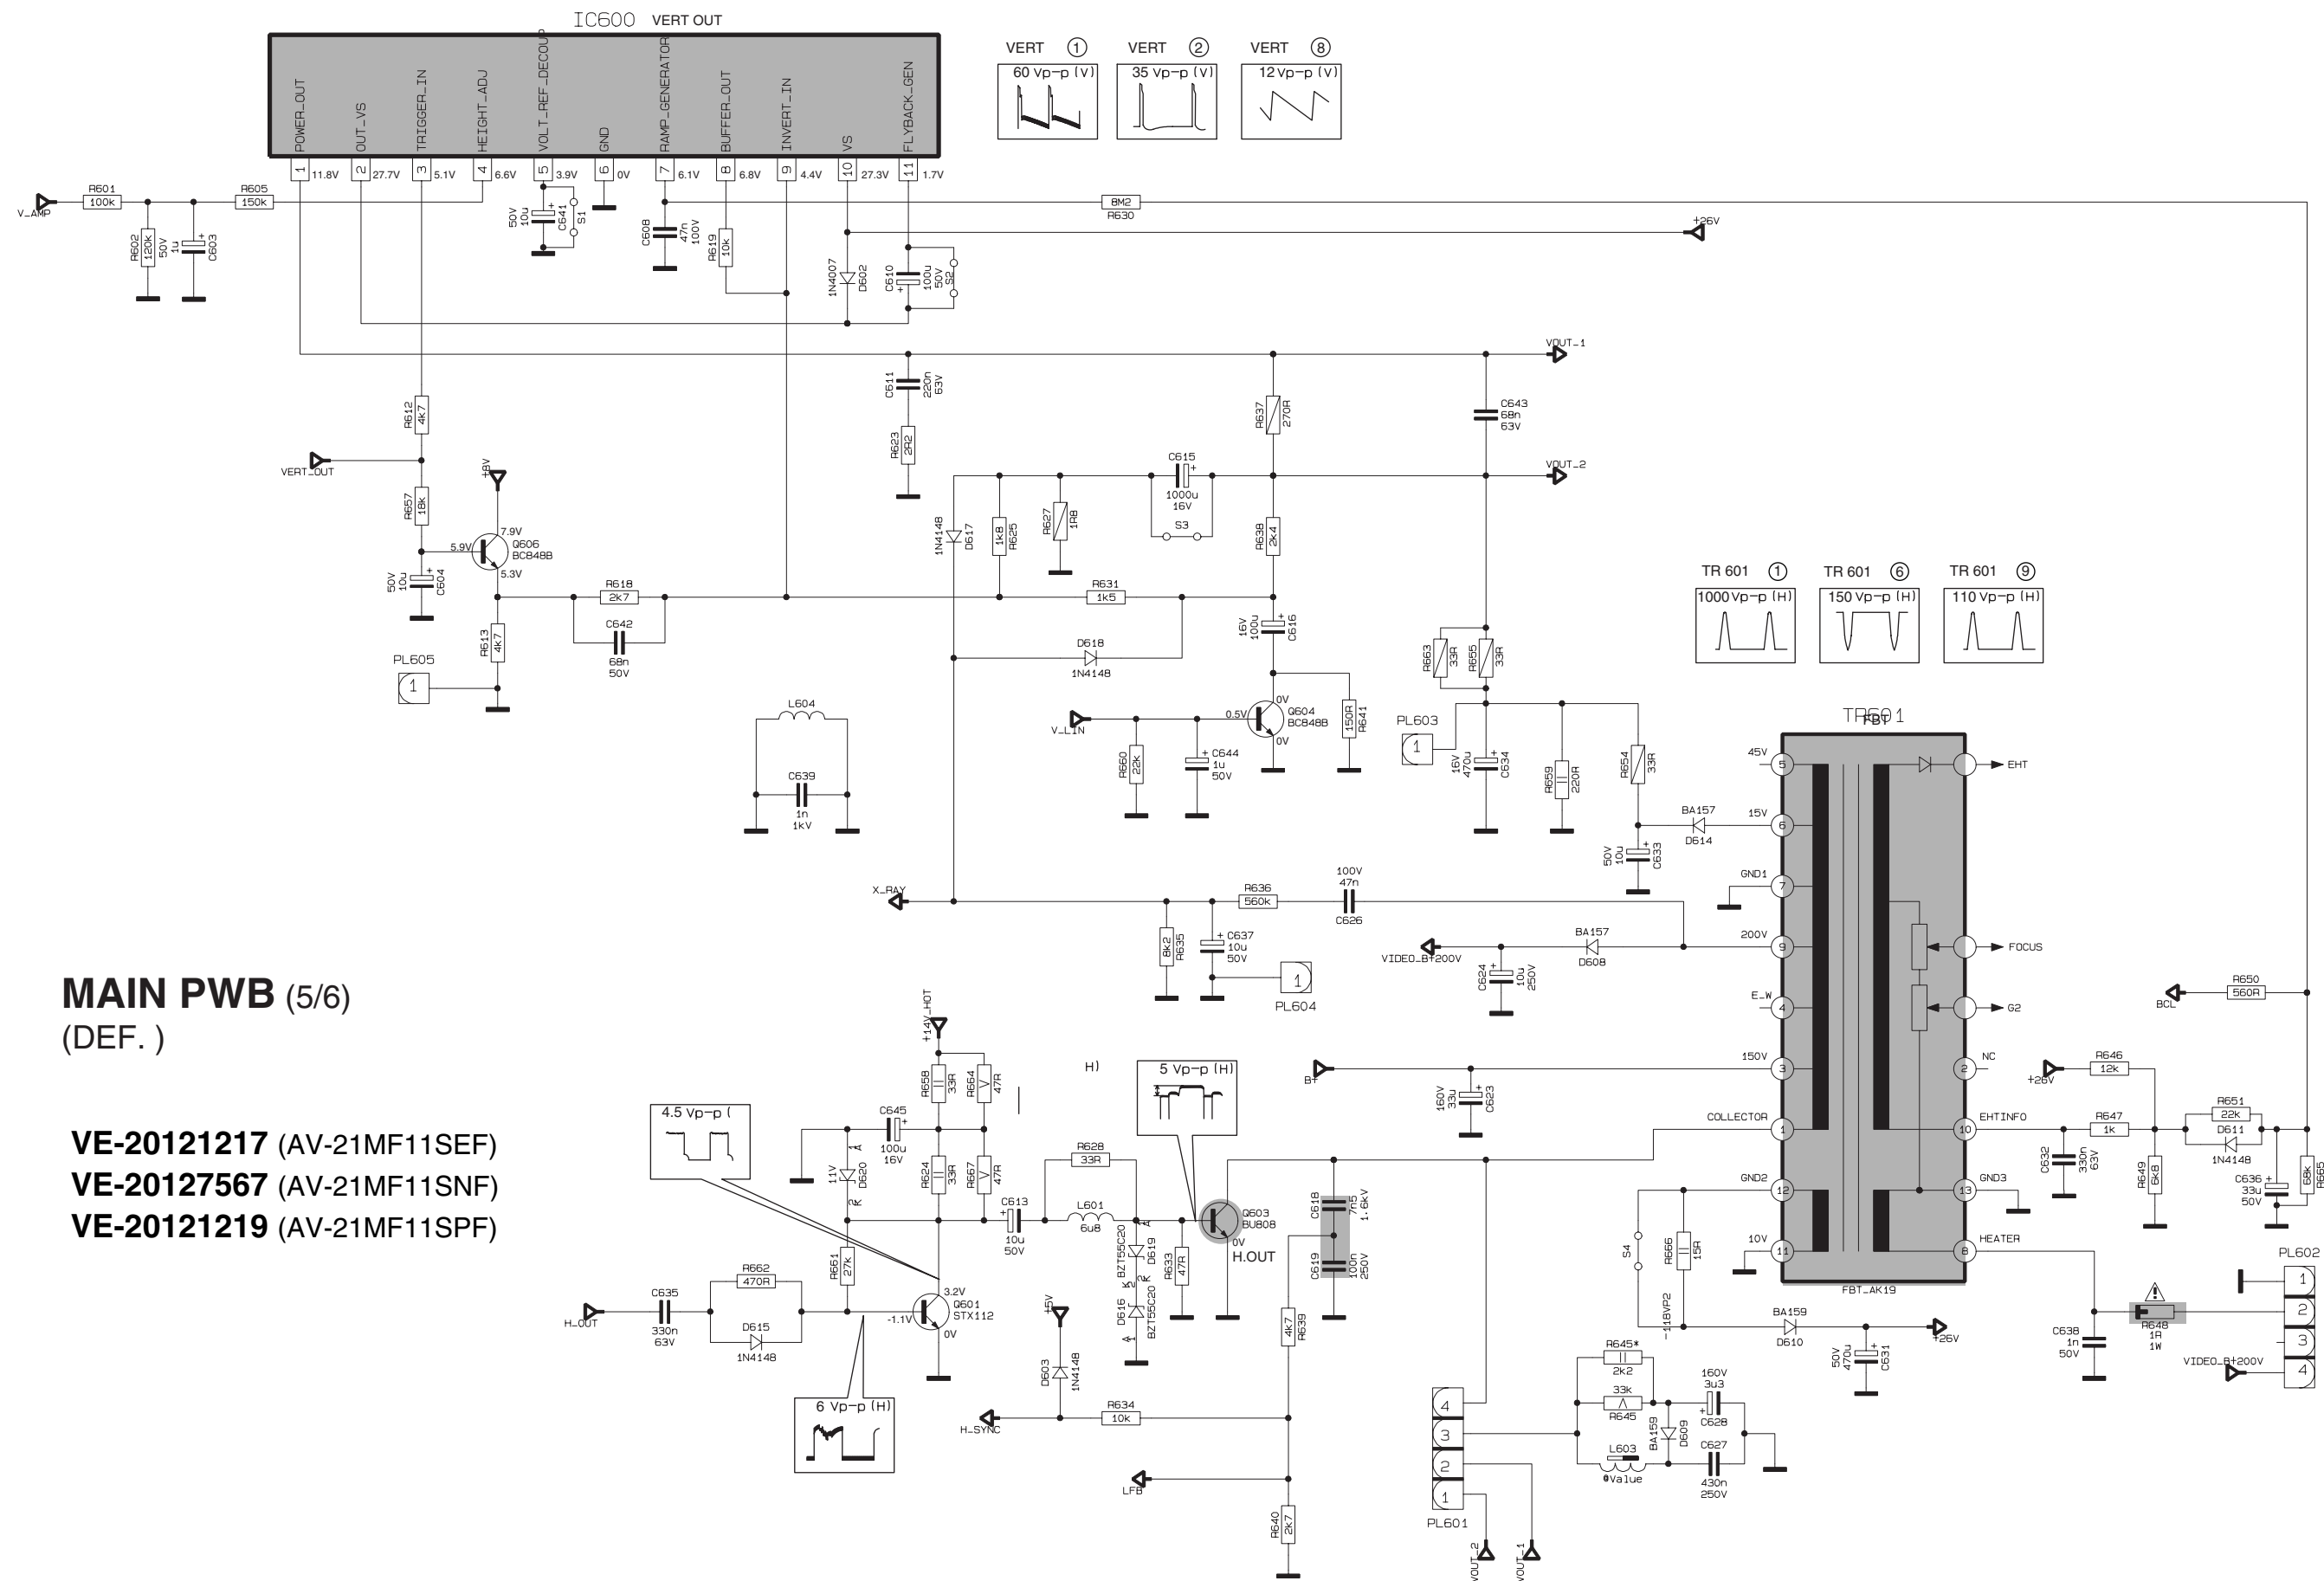


No.YA037

2-13

2-14

No.YA037

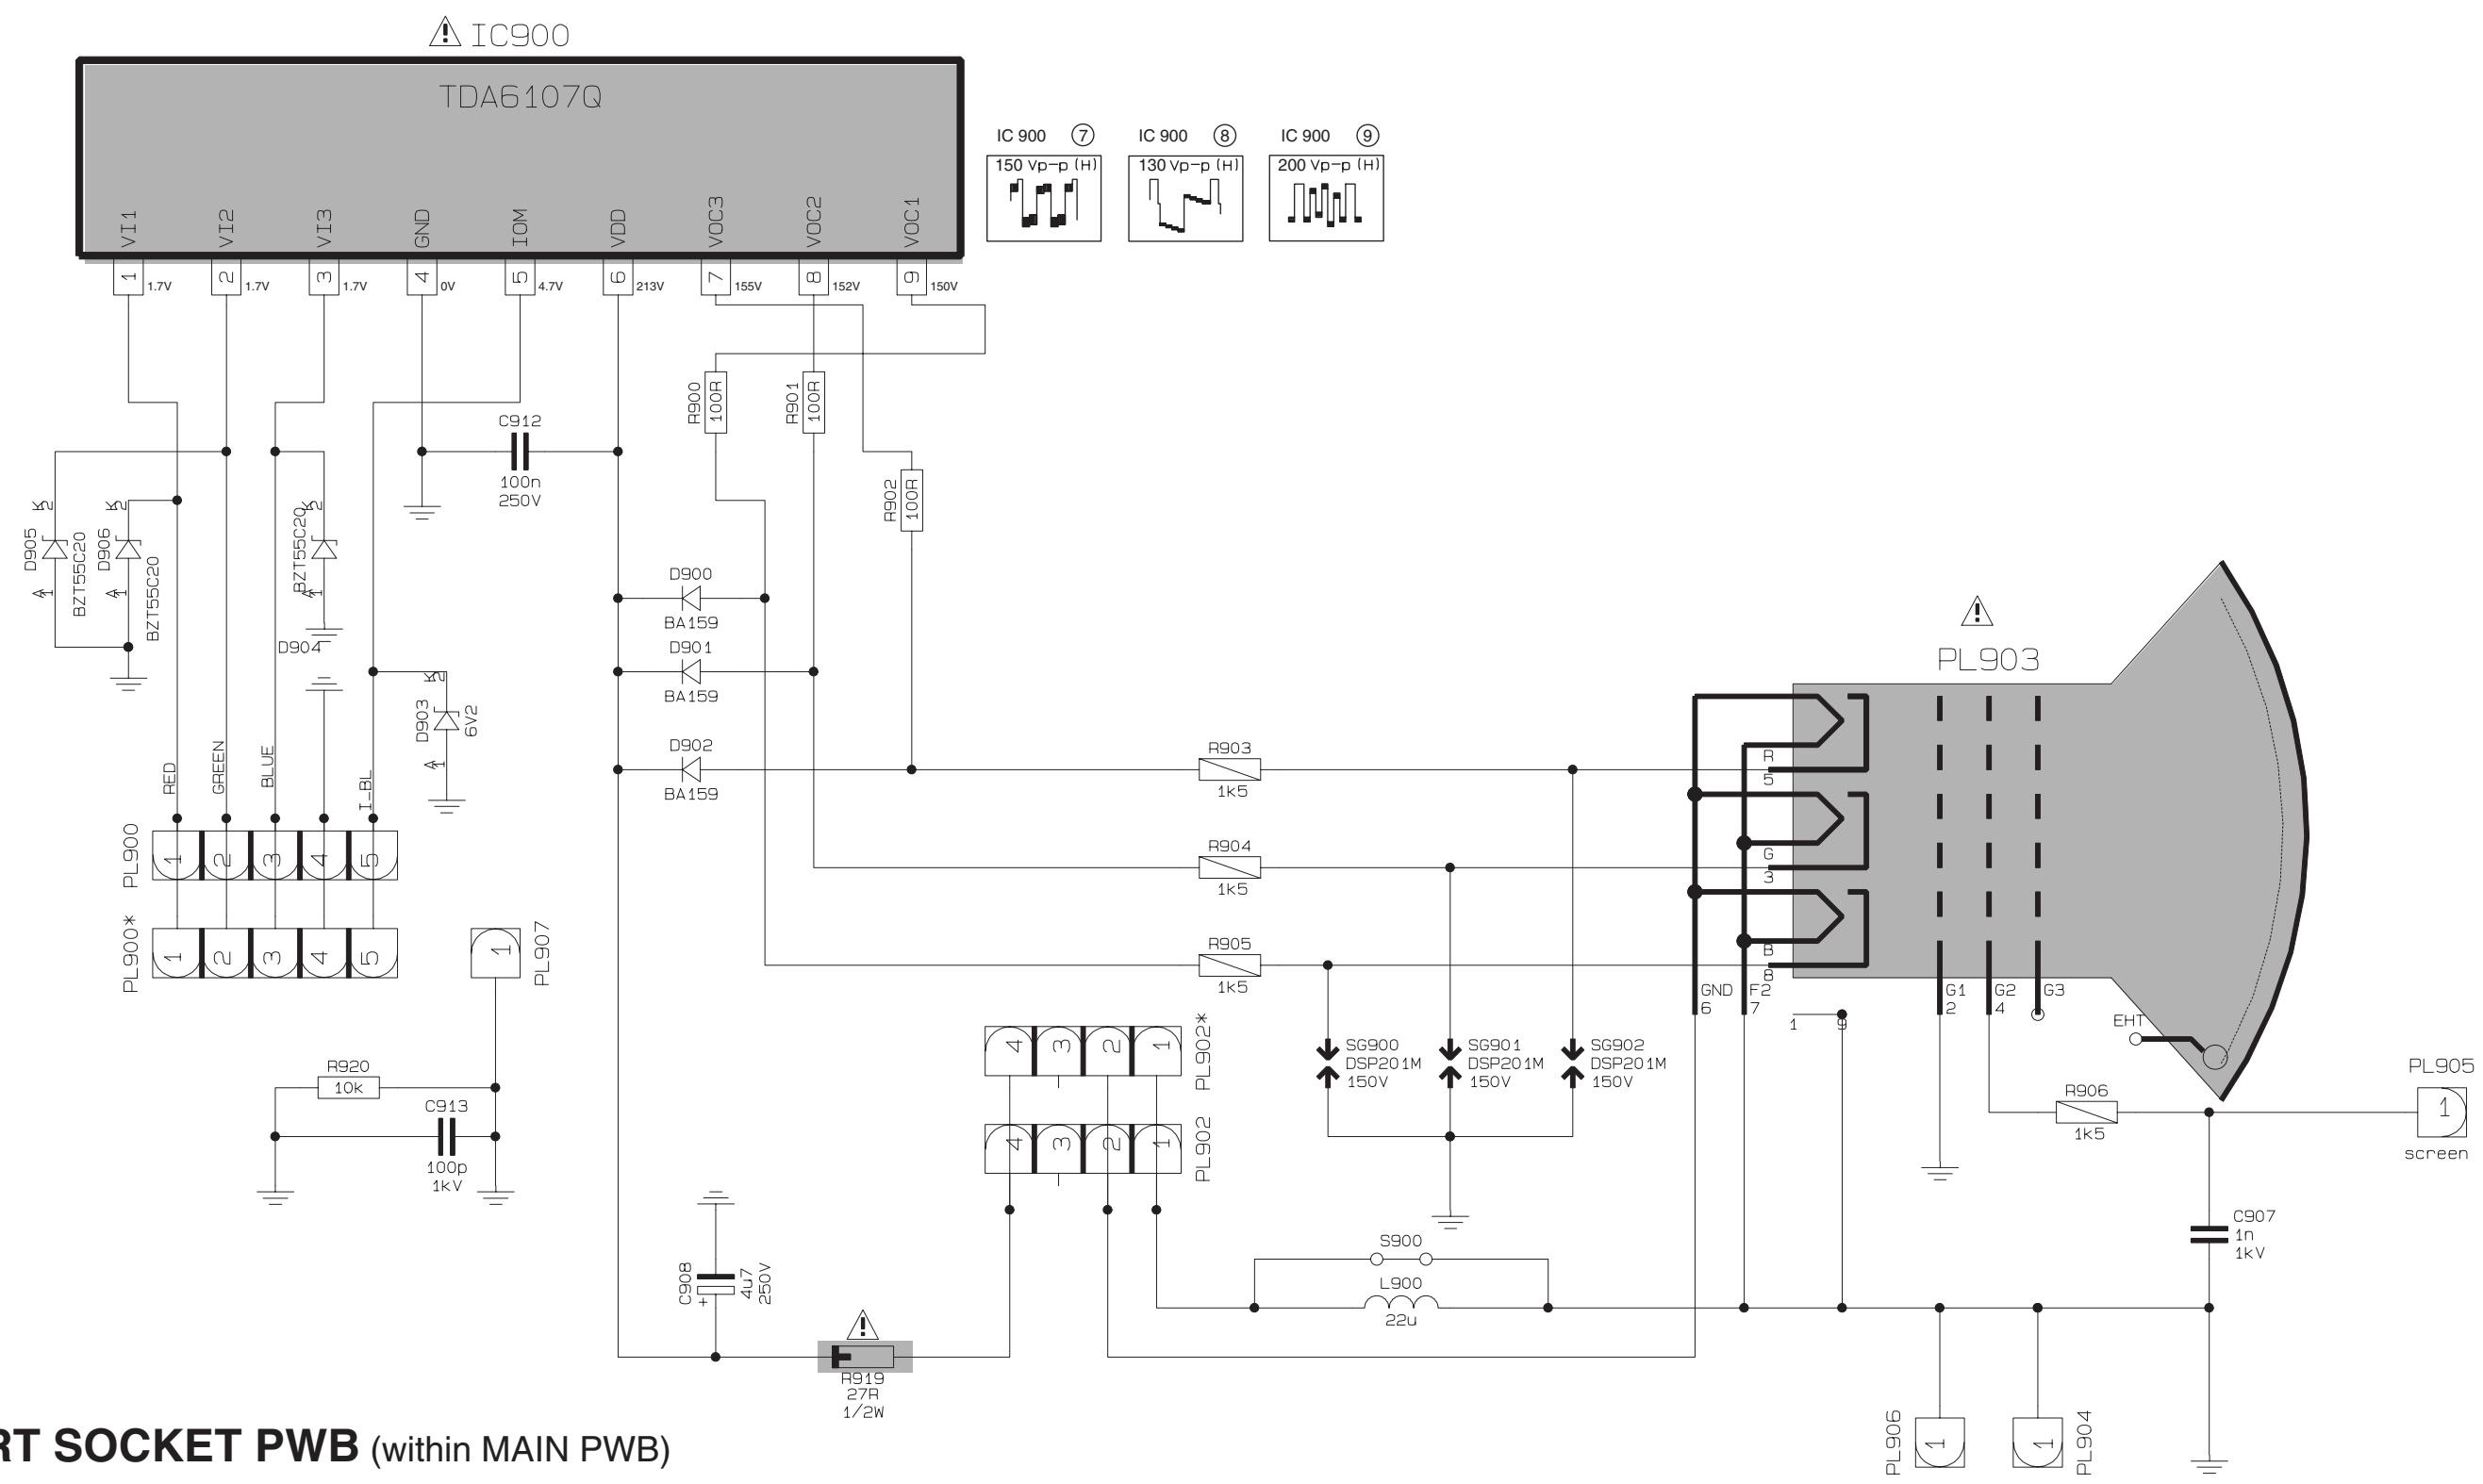

CRT SOCKET PWB (within MAIN PWB)

- VE-20121217 (AV-21MF11SEF)
- VE-20127567 (AV-21MF11SNF)
- VE-20121219 (AV-21MF11SPF)