

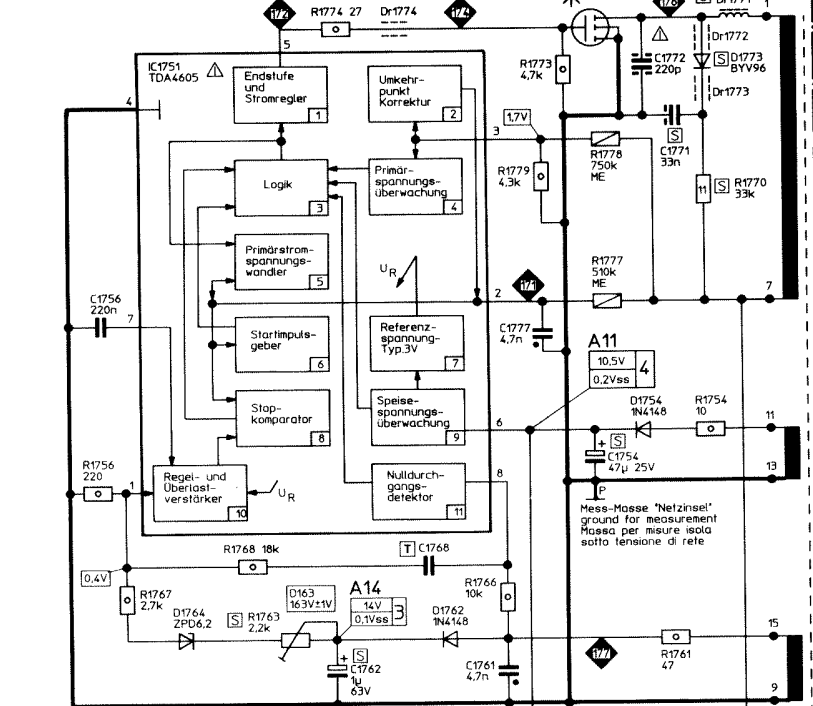
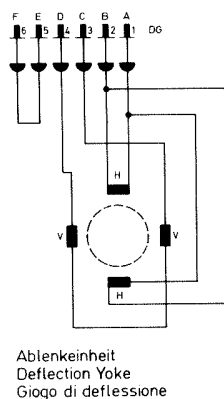
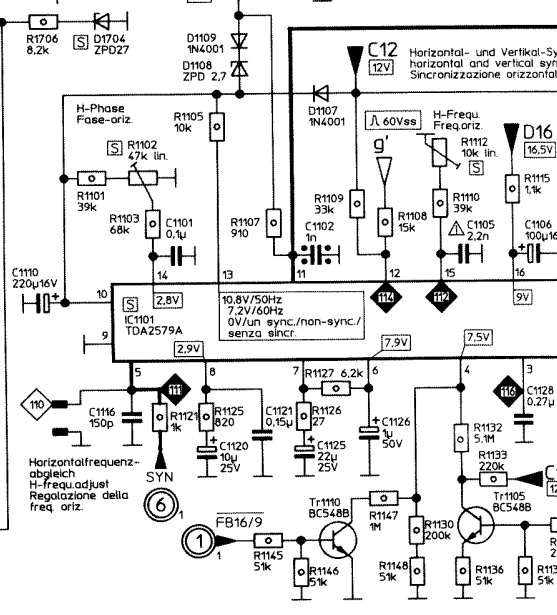


692 S- 0018

Schaltzettel
switch mode power supply
Circuito d'alimentazione ad intermittenza

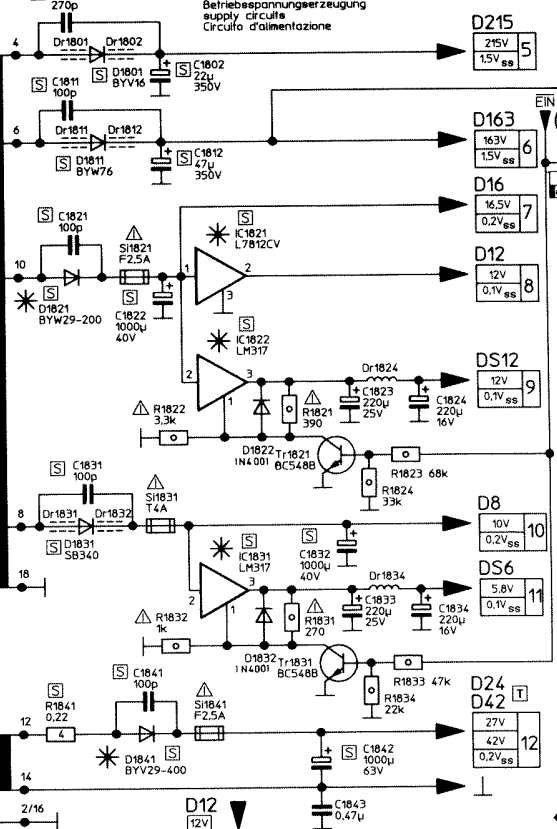

S-Mod. A
Netzschalter
on/off switch
interruttore

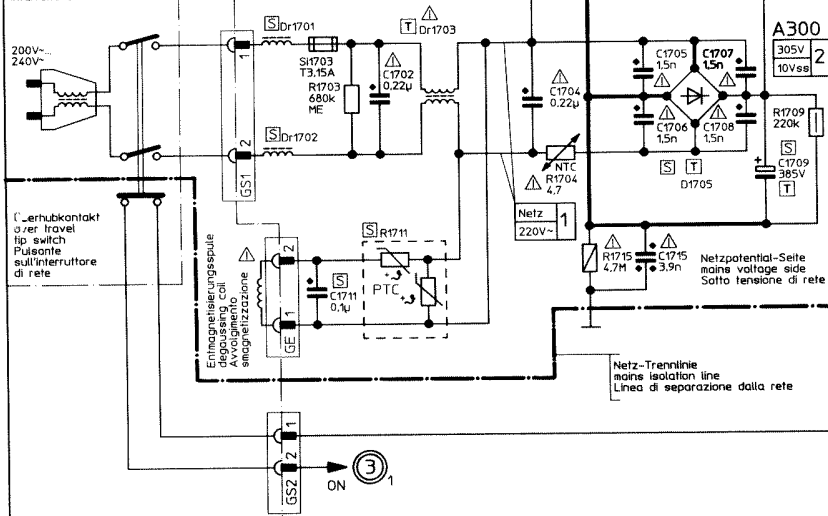

Legende siehe Tafel 4
legende see board 4
Leggenda vedi tavola 4

Änderungen vorbehalten | Subject to changes | Soggetto a leggere varianti |

BESTOCKUNGSVARIANTEN / Componente variante / Varianti componenti CHASSIS 692 G-

Hochspannung bei 1mA Strahlstrom / EHT at 1mA Iray / EAT con 1mA Iraggio |
Kaskade / cascade / Moltiplicatore BG 2034-642-...

R6 2201	A66EAK220X11	A66EAK71X01	A59EAK71X01	A66EAK252X11	A66EAK220X11	A59EAK220X01	A60EBK221X01	A59EAK71X01
27.5kV	27.5kV	27.5kV	27.5kV	27.5kV	27.5kV	27.5kV	30kV	27.5kV
Chassis 692 G-	0122	G- 0106	G- 0114	G- 0313	G- 0418	G- 0426	G2 0407	G- 0130
R1224	680k	1M	820k	680k	680k	680k	1M	820k
R1251	6.2k	7.15k	7.5k	6.2k	6.2k	6.2k	7.15k	7.5k
R1403	2.4	2.7	2.7	2.4	2.4	2.4	2.7	2.7
R1414	1.5	1.5	1.5	1.5	1.5	1.5	1.8	1.8
R1415	1.2	1.2	1.2	1.2	1.2	1.2	1.5	1.5
R1416	27k	68k	68k	27k	27k	27k	27k	68k
R1522	9.2n	8.2n	9.2n	8.2n	8.2n	8.2n	8.2n	150p
C1214	680p	560p	680p	680p	680p	680p	680p	100p
C1215	0.68u	0.62u	0.56u	0.68u	0.68u	0.62u	0.62u	0.56u
C1221	0.47u	0.39u	0.47u	0.47u	0.47u	0.39u	0.39u	0.39u
C1225	4.7n	6.8n	4.7n	4.7n	4.7n	6.8n	6.8n	6.8n
C1129	4.7n	1u	1u	1u	1u	1u	1.5u	1u
C1406	4.7u	4.7u	4.7u	4.7u	4.7u	4.7u	4.7u	4.7u
C1510	220u	220u	220u	220u	220u	220u	220u	220u
C1709	39p	100p	100p	39p	39p	39p	39p	100p
C1768	C1500	C1500	C1500	C3200	C3200	C3200	C3200	C1500
D1705	063 o. 017	018	063 o. 017	063 o. 017	063 o. 017	111 o. 018	063 o. 017	063 o. 017
L1223	8145	8145	8145	8145	8145	8145	4950	8145
IC1501	3011	3011	3011	3011	3011	3011	3011	3011
D1251	S507/44	S507/44	S507/44	S507/44	S507/44	S507/44	S507/44	S507/44
T1771	346/37	346/37	346/37	346/37	346/37	346/37	346/37	346/37
L1224	0.65mH	1mH	1mH	0.65mH	0.65mH	1mH	0.85mH	1mH
D1703	0046	0011	0038	0046	0046	0046	0046	0038
UE-LP 69228	IRFBC40	IRFBC40	IRFBC40	IRFBC40	IRFBC40	IRFBC40	IRFBC40	IRFBC40
D24/D42	D24	D24	D24	D24	D24	D42	D42	D24

